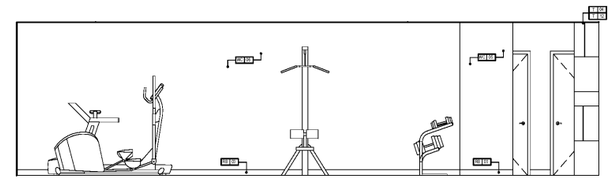

1 ID4.01 FITNESS ROOM WALL 1
SCALE: 1/4" = 1'-0"

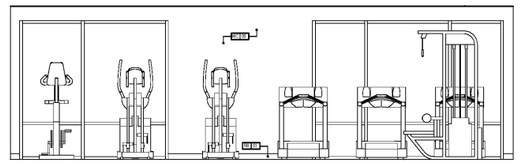

2 ID4.01 FITNESS ROOM WALL 2
SCALE: 1/4" = 1'-0"

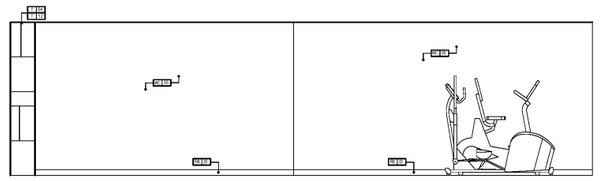

3 ID4.01 FITNESS ROOM WALL 3
SCALE: 1/4" = 1'-0"

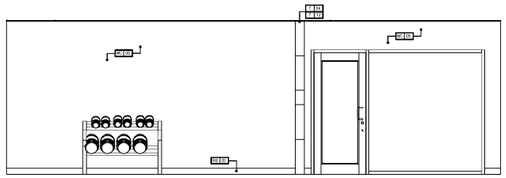

4 ID4.01 FITNESS ROOM WALL 4
SCALE: 1/4" = 1'-0"



5 ID4.01 MEETING ROOM WALL 1
SCALE: 1/4" = 1'-0"



6 ID4.01 MEETING ROOM WALL 2
SCALE: 1/4" = 1'-0"



7 ID4.01 MEETING ROOM WALL 3
SCALE: 1/4" = 1'-0"



8 ID4.01 MEETING ROOM WALL 4
SCALE: 1/4" = 1'-0"



9 ID4.01 CORRIDOR WALL INSET
SCALE: 1/4" = 1'-0"

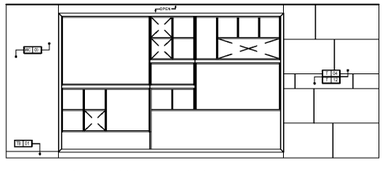

10 ID4.01 PUBLIC RESTROOM CORRIDOR/BACK OF MEDIA WALL
SCALE: 1/4" = 1'-0"

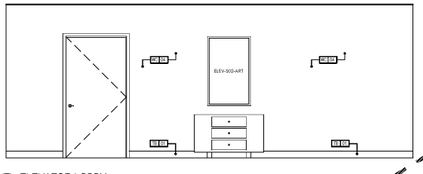

11 ID4.01 ELEVATOR LOBBY
SCALE: 1/4" = 1'-0"



12 ID4.01 OUTSIDE LOWER ELEVATOR LOBBY
SCALE: 1/4" = 1'-0"

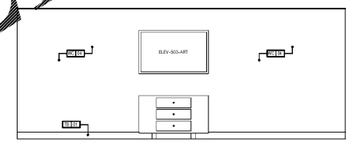

13 ID4.01 UPPER ELEVATOR LOBBIES
SCALE: 1/4" = 1'-0"



17 ID4.01 FITNESS ROOM ENTRY
SCALE: 1/4" = 1'-0"



18 ID4.01 GUEST LAUNDRY
SCALE: 1/4" = 1'-0"



19 ID4.01 GUEST LAUNDRY
SCALE: 1/4" = 1'-0"



20 ID4.01 WOMEN'S PRR WALL
SCALE: 1/4" = 1'-0"





21 ID4.01 WOMEN'S PRR WALL 2
SCALE: 1/4" = 1'-0"



22 ID4.01 WOMEN'S PRR WALL 3
SCALE: 1/4" = 1'-0"



23 ID4.01 WOMEN'S PRR WALL 4
SCALE: 1/4" = 1'-0"



24 ID4.01 MEN'S PRR WALL 1
SCALE: 1/4" = 1'-0"





25 ID4.01 MEN'S PRR WALL 2
SCALE: 1/4" = 1'-0"



26 ID4.01 MEN'S PRR WALL 3
SCALE: 1/4" = 1'-0"



27 ID4.01 MEN'S PRR WALL 4
SCALE: 1/4" = 1'-0"

KEY NOTES:

FINISH LEGEND:

| | |
|---|---|
| CB | CARPET BASE |
| CP | CARPET |
| T | TILE |
| TB | TILE BASE |
| WB | WOOD BASE |
| SC | SEALED CONCRETE |
| RB | RESILIENT BASE |
| RT | RESILIENT TILE |
| VCT | VINYL COMPOSITION TILE |
| WC | WALL COVERING |
| PT | PAINT |

NOTE:
REFER TO FF&E SPECIFICATIONS MANUAL FOR ITEMS NOT SPECIFICALLY LISTED WITHIN THIS DRAWING.

SHEET NOTES:

A. INTERIOR DESIGN DRAWINGS BY AK DESIGN GROUP ARE FOR REFERENCE ONLY. CONTRACTOR TO VERIFY ALL DIMENSIONS AND CONDITIONS.

B. PRIOR TO BEGINNING ALL WORK, VERIFY ALL EXISTING DIMENSIONS AND SQUARE FOOTAGES. NOTIFY THE DESIGNER OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION. DO NOT RELY ON SCALED PLANS FOR ACCURATE DIMENSIONS.

C. TO ENSURE GOOD QUALITY APPEARANCE AND ADHESION, THE SUB FLOOR MUST BE HARD, SMOOTH, CLEAN, DRY, AND FREE FROM DEFECTS. USE OF A SUITABLE LEVELING COMPOUND IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS WILL ENSURE THAT NO IRREGULARITIES SHOW THROUGH TO THE SURFACE OF THE FINISHED FLOOR.

D. TRANSITIONS OF ALL FLOORING MATERIALS SHOULD OCCUR AT THE CENTERLINE OF THE DOOR OR CASED OPENING. FLOAT FLOOR AS REQUIRED.

E. ALLOW ALL ADHESIVE AND SUB FLOOR TO STABILIZE TO CONSTANT TEMPERATURE CONDITIONS OF 75±5 DEGREES FOR A PERIOD OF 24 HOURS BEFORE AND AFTER INSTALLATION. ENSURE THAT ADHESIVE HAS BEEN PROTECTED FROM FROST DURING STORAGE.

F. FIT CARPET NEATLY AT WALLS, COLUMNS, ADJACENT FLOORING, ETC. INSTALL CARPET TRIM/DUSER STRIP OR TRANSITION STRIP WHERE EDGE OF CARPET IS EXPOSED AND WHERE CARPET ABUTS OTHER MATERIAL.

G. CARPET SHALL LAY THE SAME DIRECTION, UNLESS SHOWN OTHERWISE. CARPET TO HAVE MINIMAL SEAMS; CROSS JOINTS ARE NOT PERMITTED. AVOID SEAMING NEAR CORNERS AND DOORS.

H. ALL PORCELAIN TILE TO BE CLEANED AND SEALED PRIOR TO INSTALLATION.

I. NO SUBSTITUTIONS OF GRADE, QUALITY, OR MANUFACTURER SHALL BE ALLOWED WITHOUT THE APPROVAL OF AK DESIGN STUDIO.

Order Plans @ WWW.LDLine.com

AK DESIGN GROUP, LLC
HOSPITALITY INTERIORS

MEMPHIS OFFICE
7975 Stage Hills Boulevard, Suite 11
Memphis TN 38133
P: 901.384.9336
F: 855.850.8790

NASHVILLE OFFICE
1033 Demonbreun St, Suite 107
Brentwood TN 37027

INTERIOR DESIGN DRAWINGS FOR
# HOME 2
ASHEVILLE, NC

ISSUED: DATE

PUBLIC AREA ELEVATIONS AND DETAILS, CONT.
FOR CONSTRUCTION

| | DATE | SET |
|---|---|---|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

ID4.01