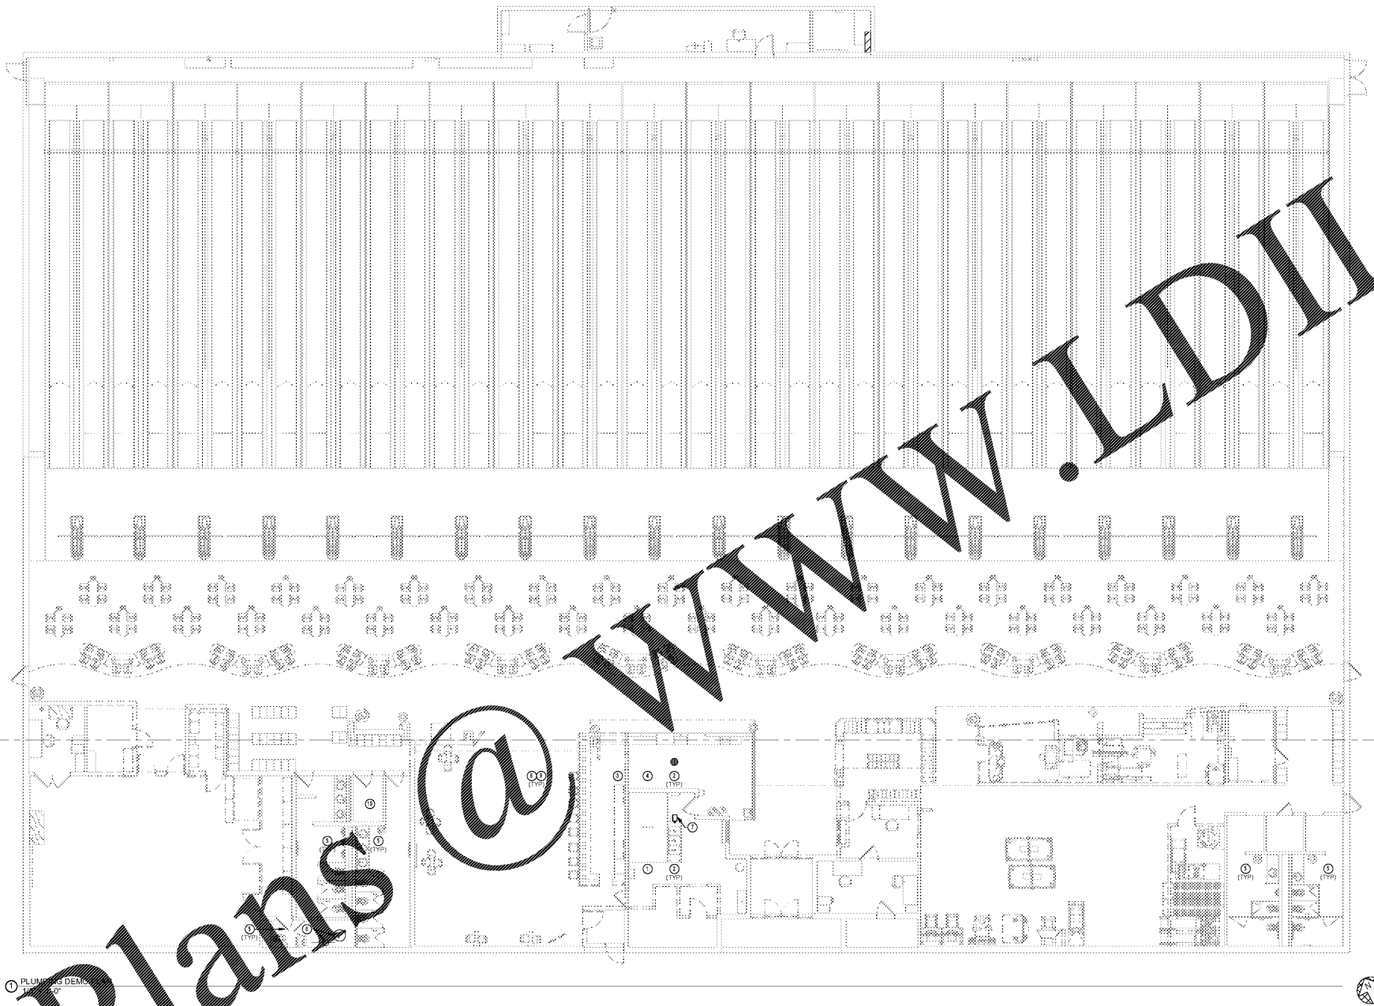

PLUMBING PLAN NOTES

1. REFER TO ARCHITECTURAL DRAWINGS FOR DEMOLITION SCOPE OF WORK WITHIN KITCHEN. ALL KITCHEN PLUMBING FIXTURES, ACCESSORIES AND PIPING ARE EXISTING TO REMAIN EXCEPT ITEMS NOTED. NOTIFY ARCHITECT IF DEFICIENCIES ARE FOUND.
2. FLOOR DRAINS, FLOOR SINKS, AND HUB DRAINS EXISTING TO REMAIN IN SNACK BAR AND KITCHEN.
3. REFER TO ARCHITECTURAL DRAWINGS FOR DEMOLITION SCOPE OF WORK WITHIN BAR. DEMOLISH EXISTING FLOOR DRAINS AND FLOOR SINKS BY REMOVING DRAIN BODIES. INSTALL PERMANENT CAPS ON WATER PIPING AT MAINS AND DEMOLISH ALL ASSOCIATED VALVES. MODIFY/EXTEND PIPING FOR FIXTURES TO REMAIN AS REQUIRED. CAP SANITARY PIPING DIRECTLY BELOW SLAB PENETRATION. INSTALL PERMANENT CAP ON VENT PIPING DIRECTLY AFTER NEW CEILING HEIGHT.
4. REFER TO ARCHITECTURAL DRAWINGS FOR DEMOLITION SCOPE OF WORK WITHIN SNACK BAR.
5. ALL RESTROOM PLUMBING FIXTURES, ACCESSORIES AND PIPING ARE EXISTING TO REMAIN. NOTIFY ARCHITECT IF DEFICIENCIES ARE FOUND.
6. WATER HEATER AND RECIRCULATION PUMP ARE EXISTING TO REMAIN. FIELD VERIFY EQUIPMENT IS IN WORKING ORDER. NOTIFY ARCHITECT IF DEFICIENCIES ARE FOUND.
7. POINT OF USE GREASE TRAP IS EXISTING TO REMAIN.
8. REPAIR WALLS, FLOOR, ETC. WHERE PLUMBING SYSTEMS ARE DEMOLISHED, TO MATCH EXISTING. REFER TO ARCHITECTURAL PLANS FOR FINISHES.
9. PRIOR TO CUTTING INTO SLAB OR CORING INTO SLAB, CONTRACTOR SHALL [illegible] AS TO VERIFY EXISTING ELEMENTS WITH [illegible] COORDINATE AROUND EXISTING ELEMENTS AS REQUIRED.
10. JANITOR'S SINKS EXISTING TO REMAIN. FIELD VERIFY EQUIPMENT IS IN WORKING ORDER. NOTIFY ARCHITECT IF DEFICIENCIES ARE FOUND.

NOTE:
EXISTING CONDITIONS WERE TAKEN FROM ORIGINAL DRAWINGS & SITE VISITS AND MAY NOT REFLECT EXACT "AS-BUILT" CONDITIONS. FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO SUBMITTING FINAL BIDS. CAREFULLY COORDINATE NEW WORK AND DEMOLITION WITH ALL OTHER DISCIPLINES AND EXISTING CONDITIONS.

CALLISONRTKL
A DESIGN CONSULTANCY OF ARCADIS

Callison RTKL, Inc.
1420 Fifth Ave., Suite 2400
Seattle, WA 98101
Tel: 206.623.4646

Callison RTKL Project No: 003-180034.00

Consultant
HENDERSON ENGINEERS
Henderson Engineers, Inc.
[illegible] Suite 300
Lenexa, KS 66[illegible]
Tel: 913.742.5000

Consultant
GMS
129 West 27th Street, 5th Floor
New York, NY 10001
Tel: 212.254.0030

BOWLERO - AUGUSTA

ISSUE FOR PERMIT / BID

Client/Owner/Project Address

Bowlmor | AMF
Client Address
222 W44th Street
New York, NY 10036

Project Address
3067 Washington Rd
Augusta, GA 30907

Issue Drawing Log

	2018.05.29	ISSUE FOR PERMIT
	2018.05.29	ISSUE FOR BID

Seal

THIS DOCUMENT IS RELEASED FOR THE PURPOSE OF PRELIMINARY SUBMITTAL
LICENSE # PE034824

IT IS NOT TO BE USED FOR CONSTRUCTION PURPOSES

Sheet Identification

PLUMBING DEMO PLAN

P-010

Order Plans @ WWW.LDILinc.com

ANDREW S. KNIGHT