


SECTION @ COOLER BOX FOUNDATION
 SCALE: 3/4" = 1'-0"

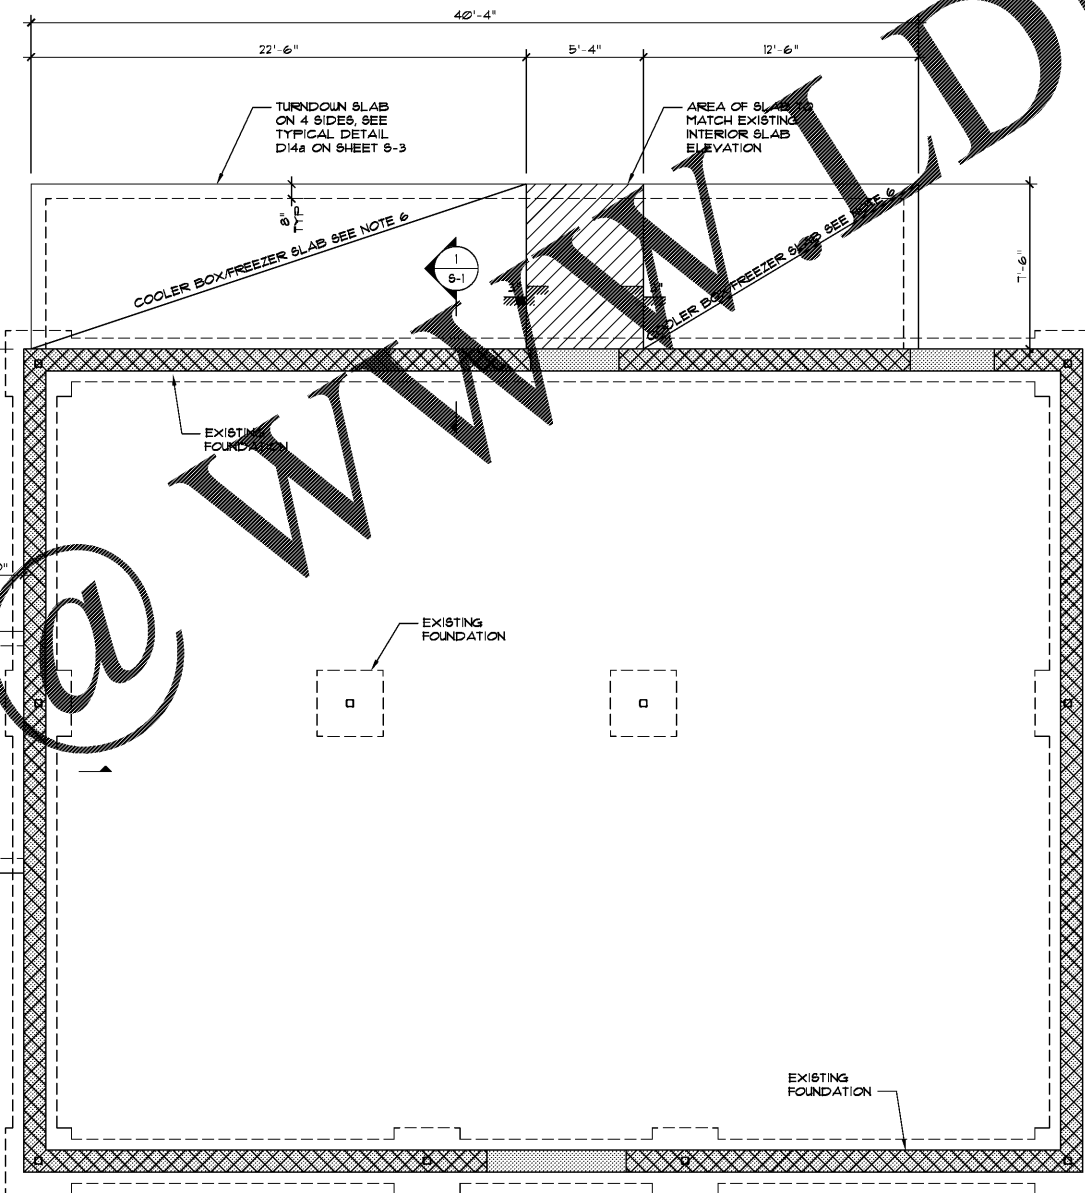

FOUNDATION PLAN
 SCALE: 1/4" = 1'-0"

FOUNDATION NOTES

- SLAB TO BE 4" NORMAL WEIGHT (FC = 3500 PSI) CONCRETE w/ 6x6-1/2x1/2 REINFORCING OVER 10 MIL VAPOR BARRIER ON 4" GRAVEL. ALL JOINTS IN WELDED WIRE MESH TO LAP 6" MINIMUM.
- SEE CIVIL DRAWINGS FOR ELEVATION OF TOP OF SLAB ON GRADE AND FINISH GRADES.
- BOTTOM OF EXTERIOR FOOTINGS SHALL BE A MINIMUM OF 7'-6" BELOW FINISHED EXTERIOR GRADE. TOP OF INTERIOR FOOTINGS SHALL BE 2'-8" BELOW FINISHED FLOOR ELEVATION (UNO.) STEP FOOTINGS AS NECESSARY TO MAINTAIN FROST.
- LIVE LOAD = 100 psf.
- SEE ARCH'T AND MECH. DUGS FOR DEPRESSIONS, TRENCHES, ETC.
- COOLER BOX SLAB TO BE 5" NORMAL WEIGHT (FC = 3500 PSI) CONCRETE w/ 6x6-1/2x1/2 REINFORCING OVER VAPOR BARRIER ON 4" GRAVEL. TOP OF SLAB TO BE -2'-3" BELOW TOP OF BUILDING FLOOR SLAB.
- PROVIDE CONTROL JOINTS, CONSTRUCTION JOINTS, AND STEP FOOTINGS FOR SLAB AS SHOWN IN TYPICAL DETAILS.
- HD - DENOTES LOCATION OF SHEAR WALL SD & 25 SHEAR WALL HOLDDOWNS, SEE DETAIL A 1456-4.
- ALLOWABLE SOIL BEARING CAPACITY = 1500 PSF.

I CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND I AM A DULY LICENSED ARCHITECT UNDER THE LAWS OF THE STATE OF TENNESSEE, LICENSE No. 106092, EXPIRATION DATE 01.31.20

DUNKIN'

dunkin'
 brands.
 STORE #358032
 US-11W
 BRISTOL, TN

REVISION		
No.	DATE	DESCRIPTION

DWG DATE: 2-1-2019
 DRAWN BY: STAFF
 PROJECT No.: 17182
 DWG TITLE:

FOUNDATION PLAN
 AND SECTIONS

SHEET No.
S-1

Order Plans @ WWW.DILine.com