


Order Plans

WWW.DLLINE.COM

SITE PLAN AND LOCATIONS OF ALL EQUIPMENT SHOWN FOR REFERENCE ONLY. VERIFY EXACT SITE LAYOUT, LOCATION OF SITE ELECTRICAL DEVICES AND QUANTITY OF SITE ELECTRICAL DEVICES WITH CIVIL DRAWINGS PRIOR TO COMMENCING WORK. VERIFY EXACT LOCATION OF EQUIPMENT AND ADJUST WIRING AS NECESSARY TO COMPENSATE FOR VOLTAGE DROP.

FURNISHED AS-BUILT DRAWINGS FOR THE POWER SYSTEM SHALL BE PROVIDED BY THE CONTRACTOR 30 DAYS OF SYSTEM ACCEPTANCE.

CONTRACTOR SHALL PROVIDE OPERATIONS AND MAINTENANCE INSTRUCTIONS FOR SYSTEMS AND EQUIPMENT TO THE BUILDING OWNER OR DESIGNATED REPRESENTATIVE.

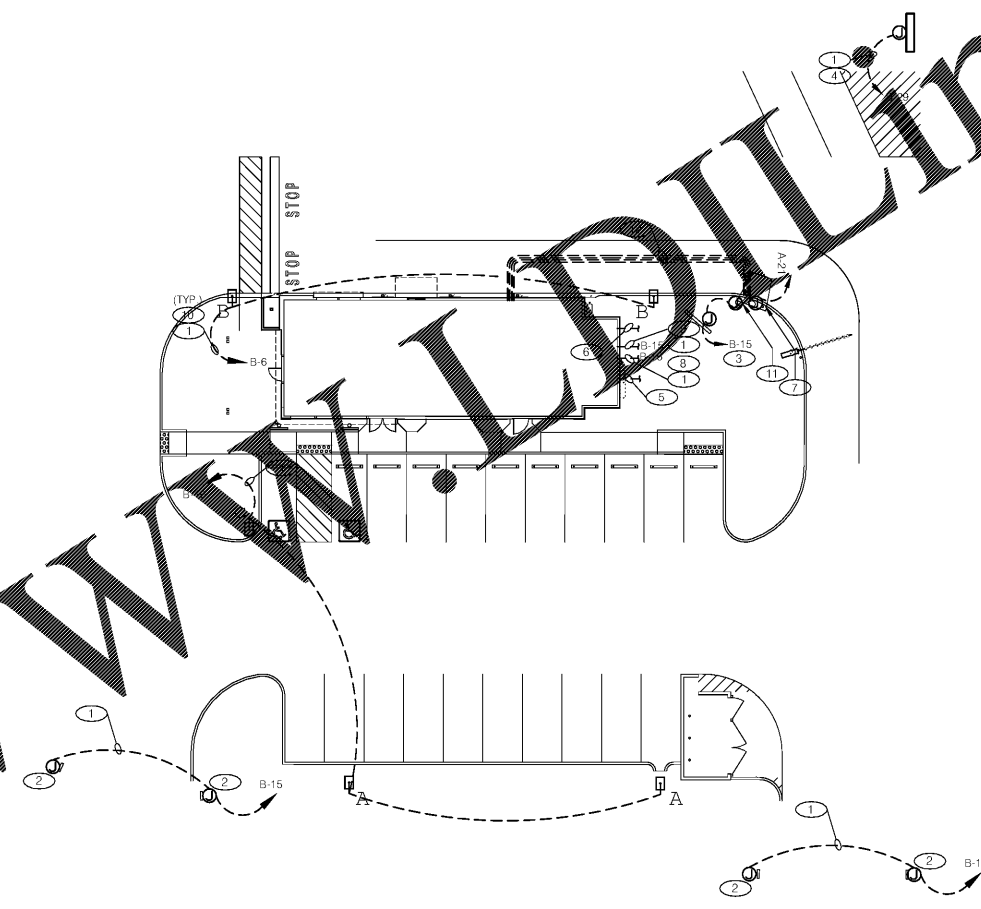

**SITE ELECTRICAL PLAN** 1"=20'-0" **A**

- 1 PROVIDE WIRING AND CONDUIT TO SITE DEVICES. VERIFY ROUTING OF CONDUIT IN FIELD PRIOR TO COMMENCING WORK. VERIFY WIRE SIZE IS ADEQUATE TO COMPENSATE FOR VOLTAGE DROP. SIZE WIRE AND CONDUIT ACCORDINGLY.
- 2 PROVIDE POWER AND CONDUIT TO DIRECTIONAL SIGN. LOCATIONS ON PLAN SHOWN FOR REFERENCE ONLY. VERIFY EXACT LOCATION AND QUANTITY WITH OWNER AND CIVIL DRAWINGS AND VERIFY REQUIREMENTS WITH SIGN PROVIDER PRIOR TO COMMENCING WORK.
- 3 MENU BOARD. REFER TO DETAILS 2&16/C1.0 AND 4/E7.0
- 4 PROVIDE POWER AND CONDUIT TO PYLON SIGN IF ONE IS TO BE INSTALLED. VERIFY IF ONE IS TO BE PROVIDED WITH OWNER AND VERIFY REQUIREMENTS WITH SIGN PROVIDER IF NECESSARY. LOCATION SHOWN FOR REFERENCE ONLY. VERIFY EXACT LOCATION WITH CIVIL DRAWINGS PRIOR TO COMMENCING WORK.
- 5 UNDERGROUND ELECTRIC SERVICE TO UTILITY CO. TRANSFORMER. REFER TO CIVIL SHEETS FOR LOCATION AND ROUTING. VERIFY AND COORDINATE ALL REQUIREMENTS WITH UTILITY CO.
- 6 UNDERGROUND TELEPHONE SERVICE. REFER TO CIVIL SHEETS FOR LOCATION AND ROUTING. VERIFY AND COORDINATE ALL REQUIREMENTS WITH UTILITY CO.
- 7 ORDER CONFIRMATION BOARD/ SPEAKER POST.
- 8 PROVIDE POWER AND CONDUIT TO PREVIEW BOARD IF ONE IS TO BE INSTALLED. VERIFY IF ONE IS TO BE PROVIDED WITH OWNER AND VERIFY REQUIREMENTS WITH SIGN PROVIDER IF NECESSARY.
- 9 PROVIDE POWER AND CONDUIT TO ILLUMINATED CLEARANCE BAR IF ONE IS TO BE INSTALLED. VERIFY IF ONE IS TO BE PROVIDED WITH OWNER AND VERIFY REQUIREMENTS WITH EQUIPMENT PROVIDER IF NECESSARY.
- 10 SITE LIGHTING, REFER TO CIVIL DRAWINGS, TYP. REFER TO DETAIL 12/C1.1.
- 11 PROVIDE CONNECTION TO ORDER CANOPY. REFER TO DETAIL 4/E7.0
- 12 PROVIDE ALL NECESSARY CONDUIT AND CONNECTIONS. QUANTITIES AND TERMINATION POINTS SHOWN FOR REFERENCE ONLY. VERIFY ROUTING AND REQUIREMENTS AND FIELD CONDITIONS AND EQUIPMENT PROVIDER PRIOR TO COMMENCING WORK. SEE SHEET E5.0 AND REFER TO DETAIL 4/E7.0 FOR MORE INFORMATION.

**KEY NOTES** **B**

NOT USED **F**

NOT USED **E**

NOT USED **D**

NOT USED **C**

J. Alkemeyer, P.E.  
 951 Monticello Avenue  
 8c, Lenoir, NC 27539  
 252-752-0202  
 FAX 252-752-0202  
 www.dlline.com

Engineering Consultant



PERMIT/CONSTRUCTION SET  
 DATE: FEB. 28, 2018

- △
- △
- △
- △
- △
- △
- △
- △
- △
- △

CONTRACT DATE: XX-XX-XX  
 BUILDING TYPE: EXPLORER LITE 40  
 PLAN VERSION: DECEMBER 2017  
 SITE NUMBER: XXX-XXX  
 STORE NUMBER: XXXXX

TACO BELL  
 101 MONTGOMERY CROSSING  
 BISCOE, NC 27209



**SITE ELECTRICAL PLAN**  
**E1.0**

PLAT DATE: