




Order Plans @

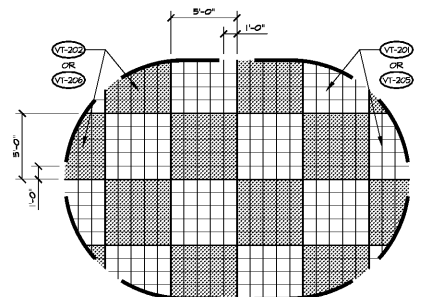

EXISTING TILE PATTERN 'A' DETAIL
 BASIS OF DESIGN: DETAIL BASED ON KROGER ISO109 (ARCHIVED) FOR REFERENCE. ALL MATERIALS AND PATTERNS TO BE VERIFIED IN FIELD. NEW MATERIALS TO MATCH EXISTING.
 A1.6.1 SCALE: 3/16" = 1'-0"

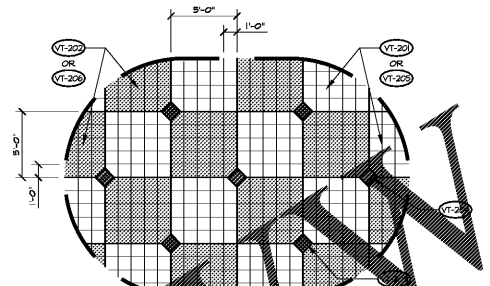

EXISTING TILE PATTERN 'B' DETAIL
 BASIS OF DESIGN: DETAIL BASED ON KROGER ISO109 (ARCHIVED) FOR REFERENCE. ALL MATERIALS AND PATTERNS TO BE VERIFIED IN FIELD. NEW MATERIALS TO MATCH EXISTING.
 A1.6.1 SCALE: 3/16" = 1'-0"

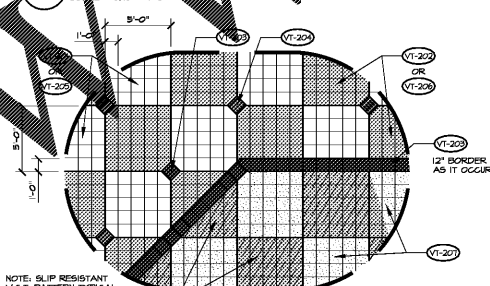


EXISTING TILE PATTERN 'C' DETAIL
 BASIS OF DESIGN: DETAIL BASED ON KROGER ISO109 (ARCHIVED) FOR REFERENCE. ALL MATERIALS AND PATTERNS TO BE VERIFIED IN FIELD. NEW MATERIALS TO MATCH EXISTING.
 A1.6.1 SCALE: 3/16" = 1'-0"

REFERENCE DETAILS

- CONTROL JOINT NOTES:**
 ASD-48, 4C, 4D, 6, 3C, 4, 6A, 6B, 14
1. PROVIDE JOINTS AT 12'-0" TO 18'-0" IN EACH DIRECTION. PRIOR TILE JOINTS TO DIRECT SIGHTLINE OR POSITIVE.
 2. PROVIDE JOINTS WHERE TILE WORK ABUTS RESTRAINING SURFACES SUCH AS PERIMETER WALLS, DISJUNCTURAL FLOORS, CURBS, COLUMNS, PIPES, CEILING, WHERE CHANGES IN BACKING MATERIALS.
 3. ALL EXPANSION CONTROL, CONTRACTION, ISOLATION, AND SEISMIC JOINTS TO BE THE STRUCTURE'S JOINTS. PROVIDE JOINTS AT 9'-0" MAXIMUM EACH DIRECTION AND AT CORNERS OF COLLAPSING WALLS. SEE CONCRETE PLACEMENT PLAN FOR JOINT LOCATIONS.

- LEGEND FOR FLOOR COVERING HATCH PATTERNS**
- NEW CARPET - SEE PLAN & SCHEDULE FOR TYPE AND MANUFACTURER.
 - AREA OF NEW CONCRETE TO BE PLACED - REFERENCE CONCRETE PLACEMENT PLAN FOR EXTENT (A1.2)
 - NEW QUARRY TILE TO MATCH EXISTING - SEE PLAN & SCHEDULE FOR TYPE AND MANUFACTURER.
 - NEW VINYL COMPOSITE FLOOR TILE - MATCH EXISTING SALES AREA FIELD AND FINISH, COLOR & TEXTURE.
 - EXISTING LIBRARY VINYL TILE - NEW TILE TO MATCH EXISTING COLOR AND FINISH.
 - NEW CERAMIC FLOOR TILE - SEE PLAN & SCHEDULE FOR TYPE AND MANUFACTURER.
 - NEW RESINOUS FLOORING - SEE PLAN & SCHEDULE FOR TYPE AND MANUFACTURER.



TILE DETAIL
 A1.6.1 SCALE: NOT TO SCALE

GENERAL FLOOR COVERING NOTES:


1. SEE SPECIFICATIONS FOR ALL FINISH GOODS AND INFORMATION, AND FOR ADDITIONAL FINISH REQUIREMENTS THAT MAY NOT BE NOTED ON DRAWINGS.
2. PRIOR TO INSTALLATION OF V.C.T. SUBCONTRACTOR TO VERIFY LAYOUT WITH EXISTING CONDITIONS AND DIMENSIONS. ANY DISCREPANCIES SHOULD BE BROUGHT TO THE ATTENTION OF KROGER PROJECT MANAGER.
3. FLOOR COVERINGS SHALL NOT BE INSTALLED OVER TRENCHES AND FITS BEFORE CONCRETE HAS CURED.
4. IF CUTTING V.C.T. IS NECESSARY, NO TILE SHALL BE LESS THAN 4" EXCEPT AT WALLS. ALL V.C.T. TILE BRAN TO RUN IN SINGLE DIRECTION UNLESS OTHERWISE NOTED.
5. ALL FLOOR TILE INSTALLATION SHALL BE COORDINATED WITH KROGER PROJECT MANAGER AS TO ALLOW FOR A MINIMUM (ONE WEEK 'NO HALL') LEAD TIME FOR COMPLETION OF TILE INSTALLATION PRIOR TO DELIVERY. INSTALLATION OF KROGER REFRIGERATION EQUIPMENT & FINISHES IF THE (ONE WEEK 'NO HALL') PERIOD CANNOT BE MAINTAINED, IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO PROTECT THE TILE BY ANY MEANS DEEMED NECESSARY BY THE KROGER PROJECT MANAGER.
6. ALL FLOOR TILE WORK IN EXISTING KROGER STORE TO BE DONE AT NIGHT. COORDINATE WITH STORE MANAGER AND KROGER PROJECT MANAGER.
7. REPLACE ALL FLOOR FINISHES DAMAGED FROM DEMOLITION AND NEW CONSTRUCTION.
8. ALL TILES TO BE 12" X 12" UNLESS NOTED OTHERWISE.
9. WHERE THO TILE THICKNESS ADJON - PROVIDE TRANSITION AS REQUIRED TO PRODUCE JOINT.
10. VERIFY ALL TILE ALIGNMENTS PER PLAN WITH FIXTURE LOCATIONS & DIMENSIONS PRIOR TO STARTING WORK.
11. WRITTEN DIMENSIONS HAVE PRECEDENCE OVER SCALE.
12. ANY DISCREPANCIES IN JOB SITE CONDITIONS CONTACT KROGER PROJECT MANAGER FOR PROCESSING.
13. CONTRACTOR IS TO PROTECT ALL NEW TILE EDGES AGAINST TRAFFIC DAMAGE BY INSTALLING MIN. 2" RISE EDGING OF SCRAP TILE UNTIL ADJACENT TILE IS LAID.
14. NEW SALES FLOOR TILE TO CARRY UNDERNEATH THE CASES, SHOWERS & FIXTURES. CONTRACTOR TO PERIMETER INTERCOMBIDS, WALLS UNLESS NOTED OTHERWISE. VERIFY EXTENT WITH KROGER.
15. CONTRACTOR IS NOT TO HAX OR SEAL V.C.T. FLOORING (BY KROGER).
16. FLOOR TILE SUBCONTRACTOR TO PROVIDE EDGING FOR FLOOR TILE. ALL FLOOR TILE JOINTS AND GRACKS PER RECOMMENDATIONS OF THE MANUFACTURER OF THE FLOOR TILE BEING INSTALLED AND LEVEL FLOOR.
17. USE A TRANSITION STRIP BETWEEN V.C.T. TO EXPOSE CONCRETE (ASD-48 OR 4C) SAND GUT SLAB FOR INSTALLATION OF V.C.T. - EXTEND GUT (MIN EDGING OPENING BY 6" +/-).
18. THE CONTRACTOR FLOOR FINISHES SHALL BE RESPONSIBILITY OF THE CONTRACTOR (B.C. SALES) THAT NEW FLOOR TILE IS READY TO BE MAINTAINED.
19. FLOOR COVERING TERMINATE AT ALL SALES AREA DOORS - PROVIDE METAL REDUCER STRIP.
20. CONTRACTOR SHALL NOT REMOVE EXISTING TILES UNTIL NEW TILE IS READY TO BE LAID. THE FINISHES TO REMAIN.
21. ALL V.C.T. FLOORING SHALL BE BASED ON PARTITIONS ADJACENT TO V.C.T. FLOORING OR PARTITIONS WITH DOVE BASES ON PARTITIONS IN SALES AREA THAT WILL BE USED BY FINISHES (CASES, SHOWERS, ECT.).
22. NEW VINYL COMPOSITE FLOORING ON ALL SALES AREA SIDE OF REAR-LOAD DAIRY COOLER PASSAGE.
23. CONTRACTOR IS TO VERIFY AND BE RESPONSIBLE FOR ALL FIELD DIMENSIONS AND CONDITIONS INCLUDING, BUT NOT EXCLUSIVE TO: CASE LOCATIONS, FLOOR CONDITIONS, PATTERN LOCATION IS RELATIVE TO CASE LOCATION AS SHOWN ON PLAN. IT IS THE RESPONSIBILITY OF THE TILE INSTALLER TO ADJUST THE PATTERN IN RELATION TO ACTUAL FIELD DIMENSIONS.
24. SONOLA MOVEMENT (ONE MOVE DEFINED AS MOVING FROM CURRENT SONOLA LOCATION TO LOCATION ALONG FLOOR WORK AND BACK TO STARTING LOCATION).
25. SHELVING IN MAIN SALES AREA TO BE ROTATED 90°. EXISTING MAIN SALES AREA VINYL COMPOSITE TILE (V.C.T.) FLOORING TO REMAIN UNLESS NOTED OTHERWISE. GENERAL CONTRACTOR IS TO REMOVE DAMAGE V.C.T. AND REPLACE WITH MATCHING V.C.T. FLOOR COVERING SCHEDULE LIST V.C.T. FLOORING DESIGN BASIS FROM AS-BUILT DOCUMENTATION FOR REFERENCE. IT IS THE RESPONSIBILITY OF THE S.C. TO VERIFY AS-BUILT PATTERNS, COLORS AND FINISHES IN FIELD AND PROVIDE LIKE V.C.T. TO MATCH - COORDINATE WORK WITH KROGER PROJECT MANAGER.

KEYED FLOOR COVERING NOTES:

1. EXTENTS OF RECESSED CONCRETE SLAB. REFERENCE DRAWING A1.2 FOR EXACT LOCATION OF EDGE OF DEPRESSED SLAB AND BACK TO STARTING LOCATION.
2. NEW STAINLESS STEEL EDGERAMP TRANSITION @ EDGE OF CERAMIC RESTROOM TILE - REFER TO ASD-4C.
3. NEW STAINLESS STEEL WATER STOP CASE FLASHING SHOWN AS A DASHED LINE. REFERENCE 6A1D-14.
4. EXISTING TRENCH DRAIN TO REMAIN. REMOVE AND REPLACE TRENCH DRAIN COVER WITH NEW TO MATCH EXISTING. SEE FLOORING DRAWINGS.
5. INSTALL CONTROL, CONTRACTION JOINTS, AND/OR ISOLATION JOINTS IN RECESSED TILE FIELD AREAS (SHOWN ON DRAWINGS) AS WELL AS WHERE TILE WORK ABUTS RESTRAINING SURFACES SUCH AS PERIMETER WALLS, DISJUNCTURAL FLOORS, CURBS, COLUMNS, PIPES, CEILING, AND WHERE CHANGES OCCUR IN BACKING MATERIAL. REFER TO DETAIL A1A.1.
6. REMOVE A SECTION OF EXISTING DAMAGE CONCRETE CURB. REPLACE WITH NEW CONCRETE CURB TO MATCH EXISTING SIZE & PROFILE - SEE ASD-6.
7. NEW CONCRETE FLOOR SLAB. SEE CONCRETE PLACEMENT PLAN FOR SURFACE FINISH AND COLOR.
8. - ALTERNATE NO. 2 - NEW CONCRETE FLOOR SLAB. SEE CONCRETE PLACEMENT PLAN FOR SURFACE FINISH AND COLOR.
9. REMOVE EXISTING QUARRY TILE & SETTING BED IN HATCHED AREA (SEE CONCRETE PLACEMENT NOTES) - SEE SHEET A1.2. REMOVE EXISTING CONCRETE SLAB IN HATCHED AREA & REPLACE WITH NEW 4" (MIN) CONC. REFER TO CONCRETE PLACEMENT PLAN SHEET A1.2 FOR SLAB ELEVATIONS AND SLOPES. REMOVE QUARRY TILE & SETTING BED TO THE "NEAREST" FULL TILE. AFTER NEW PLUMBING AND SLAB WORK IS COMPLETE, INSTALL NEW QUARRY AND SETTING BED TO MATCH EXISTING COLOR AND FINISH.
10. REMOVE EXISTING CONCRETE SLAB IN HATCHED AREA AND ADJACENT QUARRY TILE TO "NEAREST" FULL TILE AS REQUIRED FOR NEW CONSTRUCTION. REPLACE WITH NEW 4" (MIN) CONC. REFER TO CONCRETE PLACEMENT PLAN SHEET A1.2 FOR SLAB ELEVATIONS AND SLOPES. INSTALL NEW QUARRY TILE AND SETTING BED TO MATCH EXISTING COLOR AND FINISH. TILE TO FLUSH WITH EDGE OF ADJACENT CONCRETE. SEE ASD-4D.
11. EXISTING QUARRY TILE & GROUT OVER CONCRETE SLAB TO REMAIN. S.C. TO PROVIDE PROTECTIVE PROTECTION TO ALL HALL SURFACES, FIXTURES & EQUIPMENT TO PREVENT DAMAGE OR CONTAMINATION AND CLEANING WORK MAY REQUIRE TEMPORARY RELOCATION AND MOVING OF FIXTURES AS NECESSARY FOR WORK. S.C. TO REPLACE DAMAGE QUARRY TILE AND DAMAGE OR MISSING AREAS OF GROUT TO MATCH EXISTING. S.C. TO SEAL GROUT JOINTS - COORDINATE WITH KROGER PROJECT MANAGER.
12. REMOVE AND REPLACE DAMAGE OR UNEVEN QUARRY TILE & SETTING BED IN HATCHED AREAS. CONCRETE SLAB TO REMAIN. REMOVE TO NEAREST FULL TILE. EXTENTS OF TILE REMOVAL AND REPLACE MAY VARY BUT WORK SHOULD INCLUDE IN AREAS ALONG HALLS, TILE BASES, AND AT TILE CURBS. GENERAL CONTRACTOR TO FIELD VERIFY FLOORINGS AND COORDINATE EXTENT OF WORK REQUIRED WITH KROGER PROJECT MANAGER PRIOR TO SUBMISSION OF BID.
13. REFERENCE ASD-14M FOR WATERPROOFING MEMBRANE FOR RESTROOMS.
14. EXISTING V.C.T. TO REMAIN. S.C. TO REPLACE DAMAGE TILES THROUGH OUT SALES AREA TO MATCH EXISTING COLOR, FINISH, PATTERN AND V.C.T. TYPE. S.C. IS RESPONSIBLE FOR PROVIDING NEW V.C.T. TO MATCH EXISTING COLOR, FINISH AND PATTERN COORDINATE WITH KROGER PROJECT MANAGER.
15. EXISTING SLIP RESISTANT V.C.T. TO REMAIN. S.C. TO REPLACE DAMAGE TILES THROUGH OUT SALES AREA WITH SLIP RESISTANT V.C.T. TO MATCH EXISTING. REFER TO DETAIL T-1, T-2, T-3 FOR TILE PATTERN AND V.C.T. TYPE. S.C. IS RESPONSIBLE FOR PROVIDING AND INSTALLING NEW V.C.T. TO MATCH EXISTING COLOR, FINISH AND PATTERN. COORDINATE WITH KROGER PROJECT MANAGER.
16. NEW TRANSITION STRIP IN THIS AREA - REFER TO ASD-4B.
17. - ALTERNATE NO. 1 - NEW RESINOUS FLOORING IN DAIRY COOLER TO BE FAST CURE. EXTEND RESINOUS COATING ONTO CONCRETE CURB WHERE APPLICABLE.
18. REMOVE EXISTING QUARRY TILE FROM EXISTING BASE AND REPLACE WITH NEW TO MATCH EXISTING BASE TO REMAIN.

FLOOR COVERING SCHEDULE


FLOOR TYPE	FINISH REF.	MANUF.	PRODUCT/SIZE	COLOR	PURCHASED / INSTALLED
VINYL COMPOSITE TILE	VT-20	AZROCK BY TARKETT	THRU-QUARTZ	TG240 CANYAS	0.0 / 0.0
	VT-20	AZROCK BY TARKETT	THRU-QUARTZ	TG244 SPHERE	0.0 / 0.0
	VT-20	AZROCK BY TARKETT	CORTINA COLORS	V-48B SPICEBUT	0.0 / 0.0
	VT-20	AZROCK BY TARKETT	CORTINA COLORS	V-48B BALSAM	0.0 / 0.0
	VT-20	AZROCK BY TARKETT	CORTINA COLORS	V-48B DESERT LAZE	0.0 / 0.0
	VT-20	AZROCK BY TARKETT	CORTINA COLORS	V-48T FIELDSTONE	0.0 / 0.0
	VT-20	AZROCK BY TARKETT	GRANITE SLIP RESISTANT	SR-15B SANDY BEIGE	0.0 / 0.0
	VT-20	AZROCK BY TARKETT	GRANITE SLIP RESISTANT	SR-15B CINNABON STONE	0.0 / 0.0
	VT-40	ARH-STRONS	NATURAL CREATIONS CLASSICS LIBRARY VINYL TILE, 11" x 48"	PIPER DRIFTWOOD BRONZE	0.0 / 0.0
	VT-00	DUR-A-FLEX	SIKA, STONHARD	KROGER BEIGE	0.0 / 0.0
CERAMIC TILE	CT-00	DALTEC	QUARRY TEXTURES 6" x 6" - BRISTY	OTOL DIABLO RED	0.0 / 0.0
	CT-00	URBAN	RECYCLED PORCELAIN TILE - 12" x 12" - GROUT, 181-0020	OLIVE-FINISH MATTE	0.0 / 0.0
	CT-00	LATIGRE INTERNATIONAL INC.	SPECTRA LOCK PRO	T85 MOCHA	0.0 / 0.0
	CT-00	HIS FULLER CONSTRUCTION PRODUCTS, INC.	TEC AQUACOLOR EFX EXPANSY SPECIAL EFFECTS	E85 STANDARD GREY	0.0 / 0.0

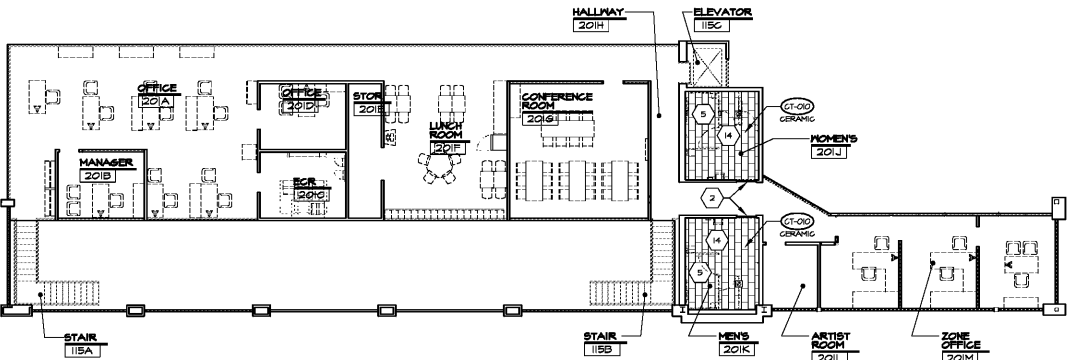

ELEVATED OFFICE FLOOR COVERING PLAN
 SCALE: 3/32" = 1'-0"



1200 W. Peachtree Street, Suite 1100
 Atlanta, Georgia 30309
 Phone: 404.525.3795
 Fax: 404.525.6732
 Website: www.dollarflowers.com



NO. REVISIONS

A With-in-the-Walls Remodel for:
KROGER STORE #GA-483 SNELLVILLE
 1670 STATE HWY 124, SUITE 'F', SNELLVILLE, GEORGIA 30078
FLOOR COVERING PLAN, NOTES & DETAILS

COPYRIGHT
 ALL RIGHTS RESERVED. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF D&E DOLLAR & FLOWERS, INC. THIS DOCUMENT IS THE PROPERTY OF D&E DOLLAR & FLOWERS, INC. AND IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREIN. ANY OTHER USE OF THIS DOCUMENT IS STRICTLY PROHIBITED. THE USER OF THIS DOCUMENT ASSUMES ALL LIABILITY FOR ANY DAMAGE OR INJURY TO PERSONS OR PROPERTY THAT MAY BE CAUSED BY THE USE OF THIS DOCUMENT. THE USER OF THIS DOCUMENT SHALL INDEMNIFY AND HOLD HARMLESS D&E DOLLAR & FLOWERS, INC. FROM AND AGAINST ALL SUCH DAMAGES AND INJURIES.

ISSUE DATE: MARCH 04, 2019
 PROJECT NO: 219206
 SHEET NUMBER: **A1.6.1**