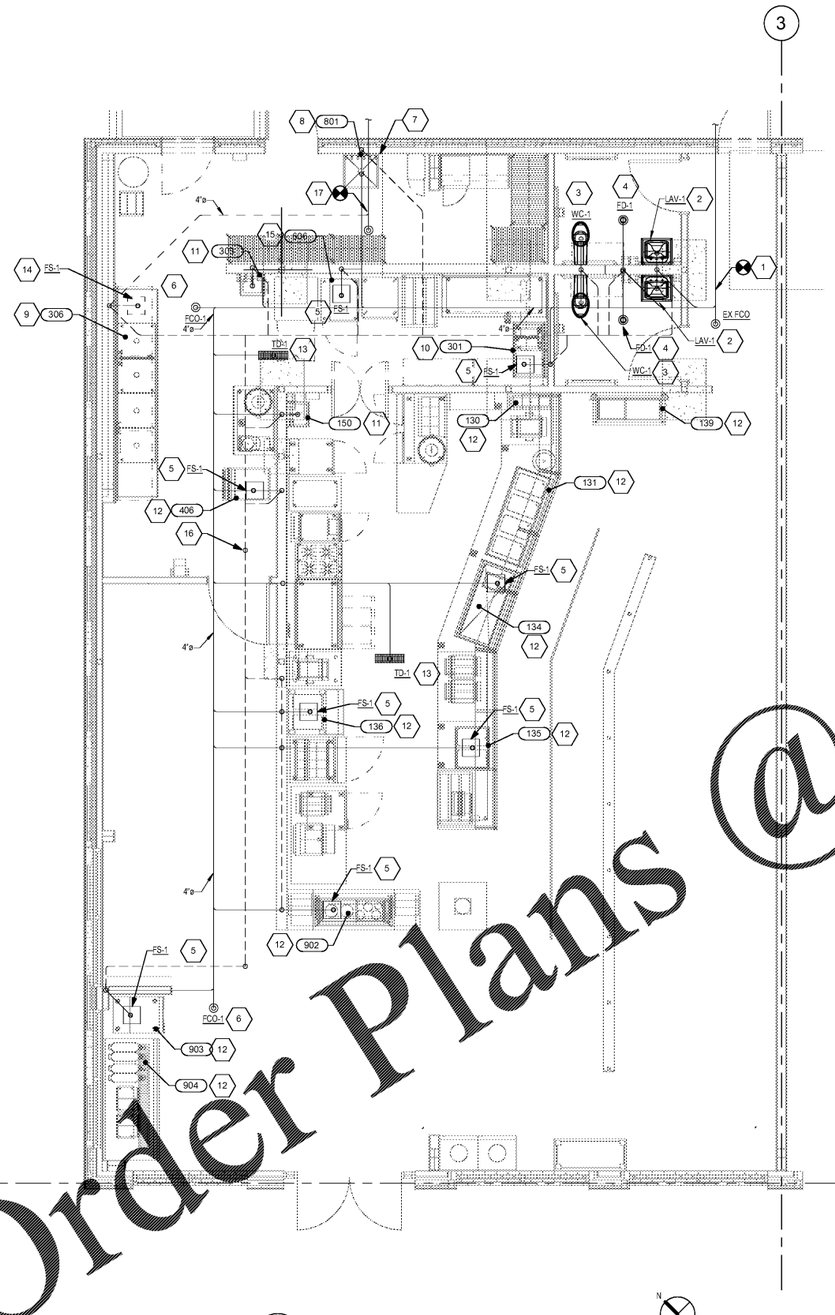

1 PLUMBING WASTE PLAN
1/4" = 1'-0"

NOTE:
FOR PIPE SIZE INFORMATION
REFER TO P-410 DETAIL 3

PLUMBING WASTE AND VENT PLAN KEY NOTES

1. EXTEND AND CONNECT 4" SANITARY WASTE PIPING TO 4" EXISTING SANITARY WASTE PIPING BELOW GRADE. FIELD VERIFY EXACT LOCATION, SIZE, DEPTH OF INVERT, AND DIRECTION OF FLOW PRIOR TO START OF ANY WORK.
2. LAVATORY:
ROUTE SANITARY WASTE PIPING BELOW SLAB AND EXTEND UP IN WALL. EXTEND VENT PIPING UP IN WALL TO CEILING SPACE. CONTRACTOR SHALL PROVIDE AND INSTALL PIPE PROTECTOR FOR P-TRAP AND SUPPLIER, TRUEBRO LAVGUARD 2 OR EQUAL.
3. WATER CLOSET:
ROUTE SANITARY WASTE UP AND CONNECT TO WATER CLOSET. EXTEND VENT UP IN WALL TO CEILING SPACE.
4. FLOOR DRAIN:
ROUTE SANITARY WASTE UP AND CONNECT TO FLOOR DRAIN. EXTEND VENT UP IN WALL TO CEILING SPACE.
5. FLOOR SINK:
ROUTE SANITARY WASTE UP AND CONNECT TO FLOOR SINK. EXTEND VENT UP IN WALL TO CEILING SPACE.
6. FLOOR CLEANOUT:
CLEANOUT SHALL BE INSTALLED FLUSH WITH FINISHED FLOOR.
7. WATER HEATER:
ROUTE 3/4" PRESSURE RELIEF TO MOP SINK. ROUTE 1" INDIRECT DRAIN FROM WATER HEATER DRAIN PAN TO MOP SINK.
8. MOP SINK:
ROUTE SANITARY WASTE UP AND CONNECT TO MOP SINK. EXTEND VENT UP IN WALL TO CEILING SPACE.
9. 4-COMPARTMENT SINK:
ROUTE WASTE FROM SINK TO FLOOR SINK BELOW. ENSURE PROPER AIR GAP.
10. 1-COMPARTMENT SINK:
ROUTE INDIRECT DRAIN FROM SINK TO FLOOR WITH MINIMUM 2" AIR GAP.
11. ROUTE SANITARY WASTE PIPING BELOW SLAB AND EXTEND UP IN WALL. EXTEND VENT PIPING UP IN WALL TO CEILING SPACE.
12. ROUTE INDIRECT DRAIN FROM EQUIPMENT TO NEAREST FLOOR SINK WITH APPROVED AIR GAP.
13. TRENCH DRAIN:
ROUTE SANITARY WASTE UP BELOW SLAB AND CONNECT TO TRENCH DRAIN.
14. FLOOR SINK:
ROUTE SANITARY WASTE UP AND CONNECT TO FLOOR SINK. EXTEND VENT UP IN WALL TO CEILING SPACE.WASTE PIPING SHALL A MINIMUM OF 10'-0" DWV COPPER OR CAST IRON DOWNSTREAM OF FLOOR SINK.
15. ROUTE INDIRECT FROM RETHEMALIZER TO FLOOR SINK WITH APPROVED AIR GAP.
16. 3" VENT THRU ROOF.
17. TIE NEW 4" GREASE WASTE INTO EXISTING GREASE. FIELD VERIFY EXACT LOCATION PRIOR TO INSTALLING PIPE.

GPD GROUP
Professional Corporation
520 S. MAIN STREET, SUITE 2531
AKRON, OH 44311
P: 330-572-2100 F: 330-572-2101

MOE'S SOUTHWEST GRILL

REV NO.	DATE	DESCRIPTION
	07/27/18	ISSUED FOR PERMIT

DRAFT

MOE'S SOUTHWEST GRILL
3732 US HWY 280
PHENIX CITY, AL 36867

PLUMBING WASTE AND VENT PLAN

	DATE:
BRAND REVIEW	07/27/2018
PERMIT	07/27/2018
BID	--/--/----
CONSTRUCTION	--/--/----
RECORDED	--/--/----

PROJECT MANAGER	DESIGNER
JB	DTI

JOB NO.
2018375.13

P-110

Order Plans @ WWW.LDILine.com

7/27/2018 1:21:52 PM
O:\2018\2018375\13 Moes Phenix City (Ferris)\04 ConstDocs\Revit (2017)\MEP\1 MEP Model