


6E DEMOLITION SLAB AND FLOOR FINISHES PLAN – ELEVATED OFFICE
SCALE: 3/32" = 1'-0"

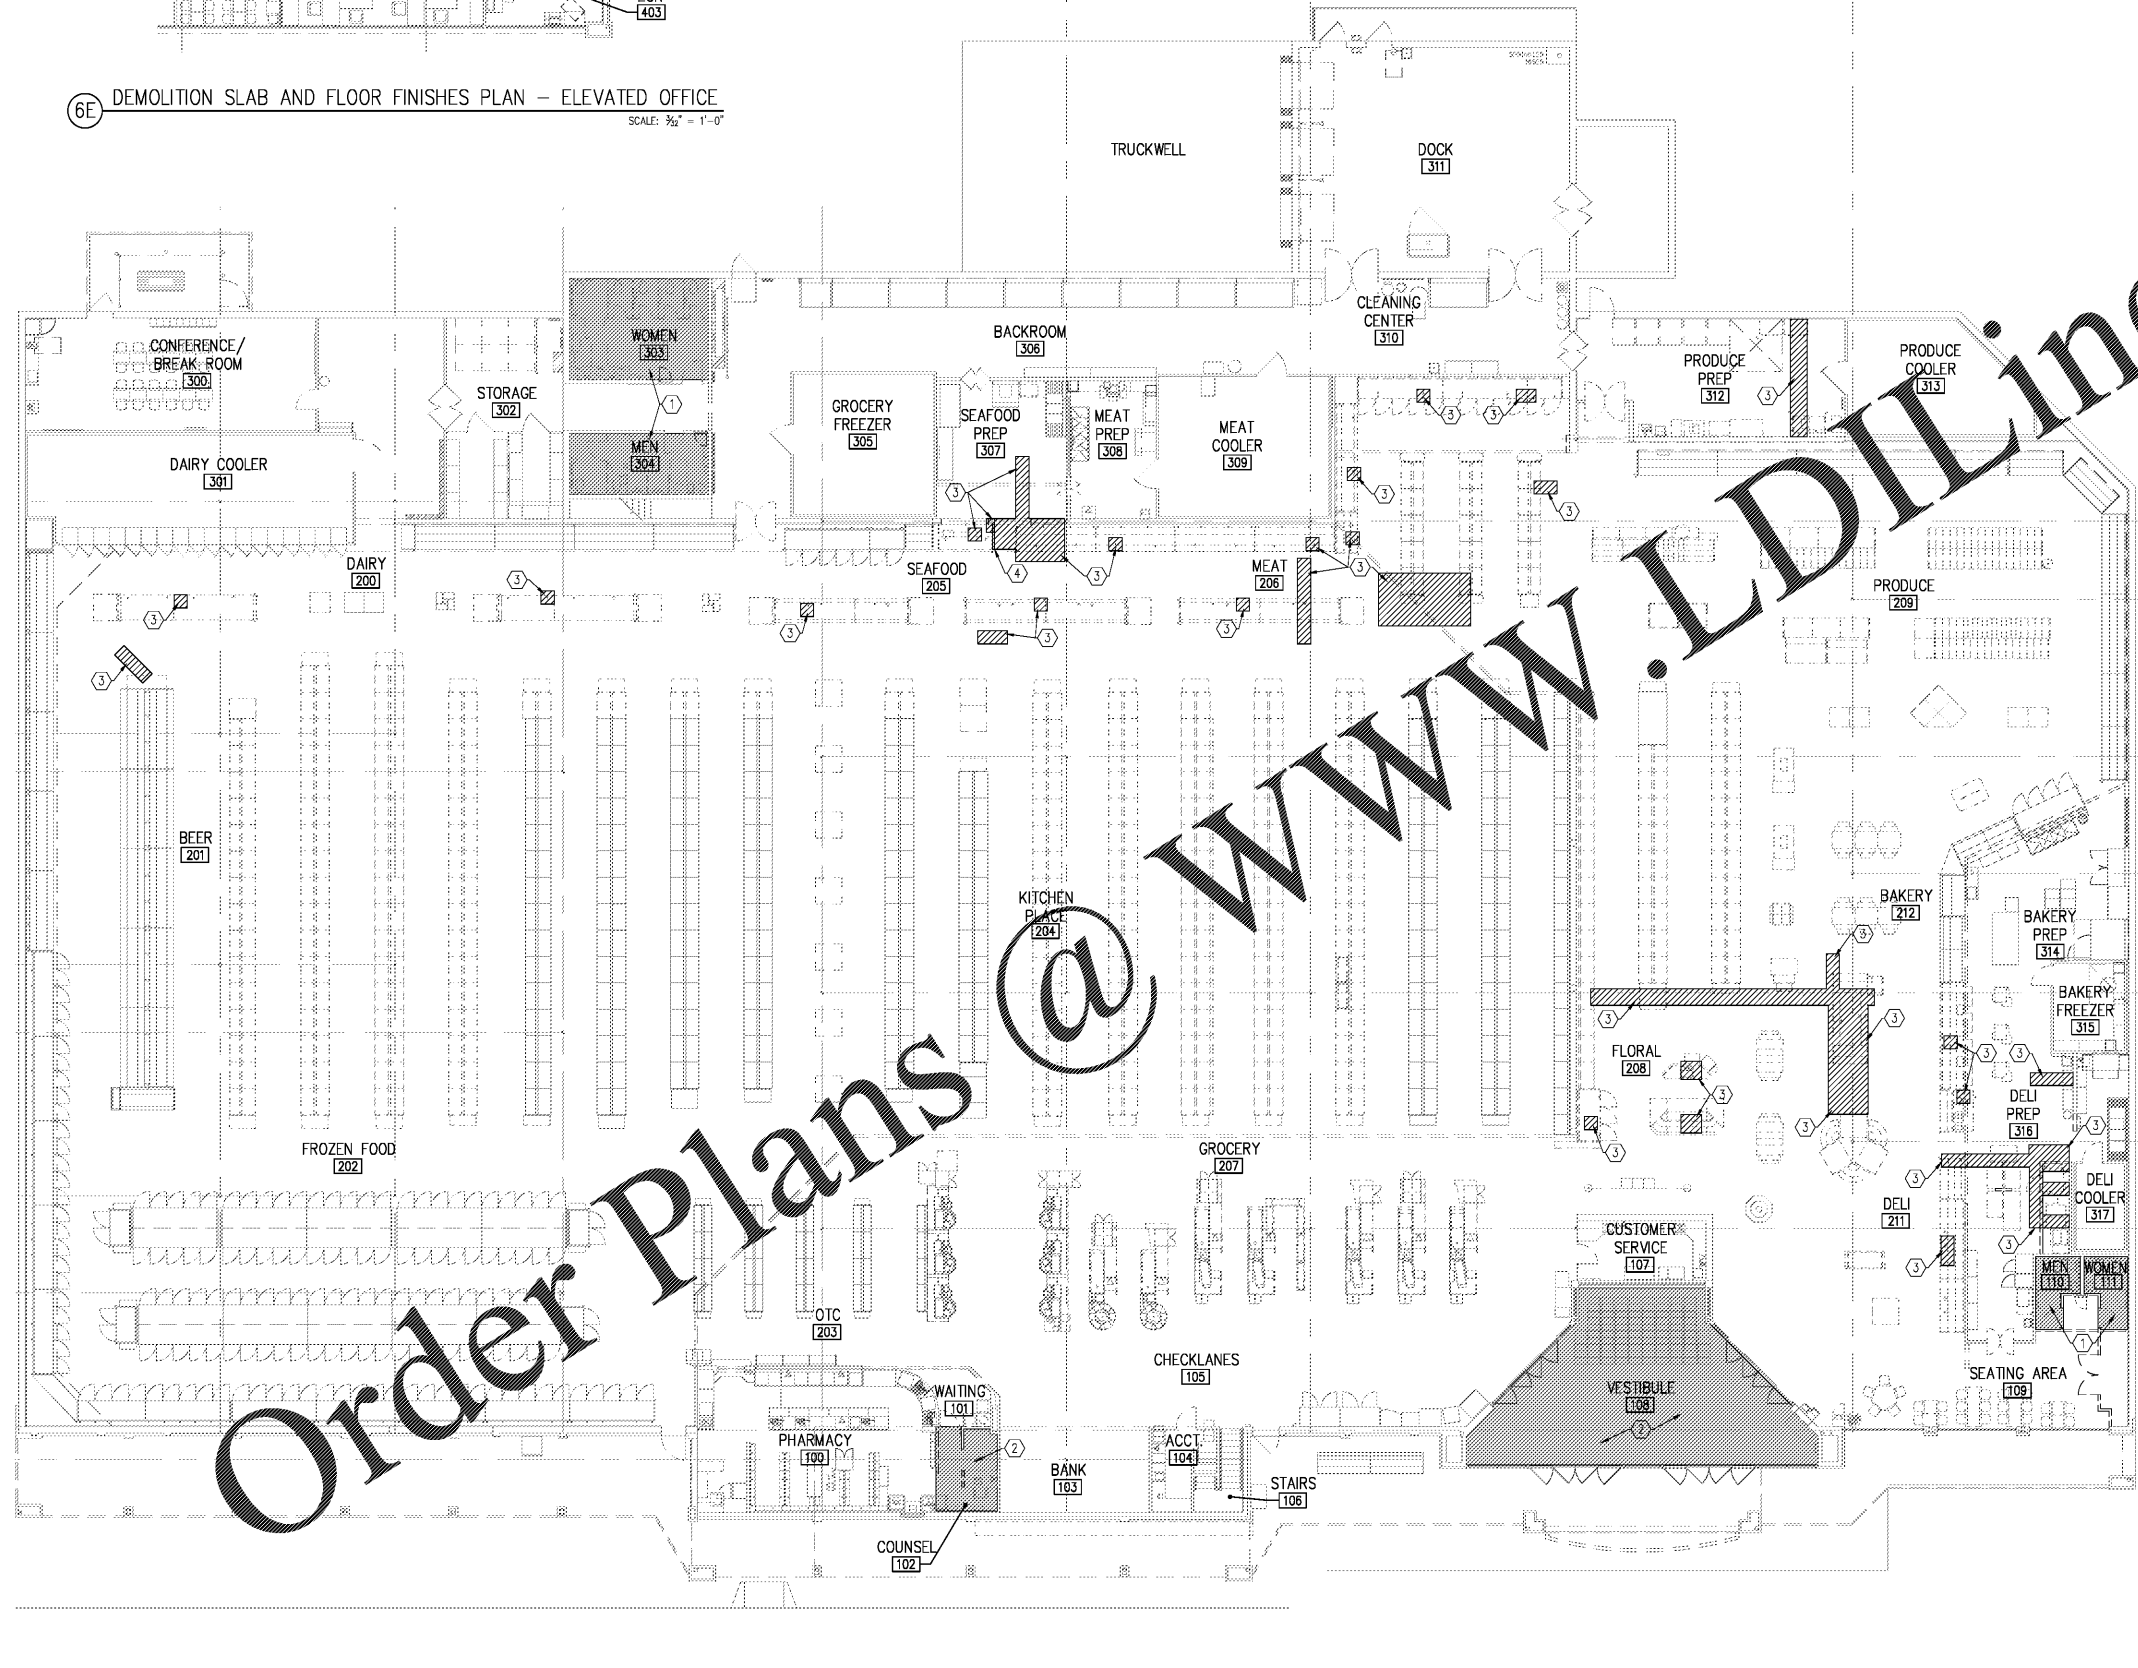

Order Plans @

4A DEMOLITION SLAB AND FLOOR FINISHES PLAN – MAIN LEVEL
SCALE: 3/32" = 1'-0"

PLAN NOTES

- REMOVE & DISPOSE OF EXISTING FLOOR TILE FINISH INCLUDING MORTAR SETTING BED. CLEAN SLAB SURFACE TO PROVIDE A SMOOTH/FLUSH SURFACE FOR NEW FLOOR FINISH PER A1.5, A4.3, AND A4.4.
- REMOVE & DISPOSE OF EXISTING CARPET, PAD, GLUE, ETC. AS REQUIRED TO PROVIDE A CLEAN SLAB SURFACE FOR NEW FINISH PER A1.5.
- REMOVE & DISPOSE OF EXISTING FLOOR SLAB AS REQUIRED FOR NEW UNDER-SLAB PLUMBING WORK. COORDINATE EXACT LOCATIONS/AREAS OF REMOVAL W/ PLUMBING DRAWINGS.
- REMOVE & DISPOSE OF EXISTING TILED CONCRETE CURB (SHOWN SHADED) ALONG SIDE OF REFRIGERATED CASE INCLUDING ANY SLAB DOWELS. PATCH & REPAIR FLOOR SLAB AND FINISH TO MATCH EXISTING ADJACENT.

GENERAL NOTES

- THIS DRAWING IS PROVIDED FOR INFORMATIONAL/ESTIMATING PURPOSES ONLY. ALL REQUIRED SLAB/PAVING REMOVAL MAY NOT BE INDICATED. IT IS THE CONTRACTOR'S RESPONSIBILITY TO REVIEW ALL DRAWINGS CAREFULLY INCLUDING ARCHITECTURAL, PLUMBING AND ELECTRICAL FOR MORE INFORMATION ON REQUIREMENTS AND LOCATIONS. THE DIMENSIONS SHOWN SHOULD BE FIELD VERIFIED FOR COORDINATION OF EXISTING CONDITIONS.
- UNLESS SHOWN OTHERWISE, ALL TRENCHES ARE TO BE 2'-0" WIDE.
- COORDINATE TRENCH LOCATIONS AND AREA OF CUT-OUTS WITH PLUMBING DRAWINGS.
- USE DRILLED HOLES TO CREATE CORNERS OF CUTS. DO NOT OVER-CUT CORNERS.
- COORDINATE LOCATIONS OF OTHER UNDER-SLAB UTILITIES FROM EXISTING PLANS PRIOR TO WORK AND ALERT OWNER OF ANY POSSIBLE CONFLICTS.
- PROVIDE STEEL PLATES OVER ANY TRENCHES THAT ARE ACCESSIBLE TO STORE CUSTOMERS OR EMPLOYEES UNTIL ALL WORK FOR THAT TRENCH HAS BEEN COMPLETED.
- REMOVE AREA OF EXISTING SLAB TO PROVIDE TRENCH FOR NEW REFRIGERATION LINE EXTENSION OFF OF EXISTING LINE. SIZE, LENGTH AND LOCATION TO BE DETERMINED IN FIELD BY CONTRACTOR.
- THICKNESS OF ALL EXISTING SLABS REQUIRED FOR REMOVAL ARE NOT PRE-DETERMINED & THEREFORE MAY NOT BE GENERAL 4" THICKNESS. CHANGE ORDERS WILL NOT BE ACCEPTED FOR "THICK SLAB" UNLESS IT IS OVER 6" THICK. IF SUCH SLAB IS ENCOUNTERED, THE CONTRACTOR SHALL IDENTIFY EXTENT(S) OF THE THICKENED SLAB AREA(S) PRIOR TO REMOVAL AND OBTAIN A WRITTEN APPROVAL FROM THE KROGER PROJECT MANAGER.
- THE FOLLOWING AREAS OF WORK ARE TO BE PRICED AS ALTERNATES:
 - ALTERNATE #1 – ALL WORK IN DELI PREP AREA.
 - ALTERNATE #2 – ALL WORK IN FRONT RESTROOMS.
 - ALTERNATE #3 – ALL WORK IN REAR RESTROOMS.
 - ALTERNATE #4 – ALL WORK IN 'PICK-UP' AREA.
 - ALTERNATE #5 – WORK FOR REFRIGERANT LEAK DETECTION SYSTEM.

LEGEND

- INDICATES AREA OF SLAB REQUIRING REMOVAL
- INDICATES AREA OF FLOOR FINISH REMOVAL



A REMODEL FOR:
KROGER GA-214
3199 US HWY 278, N.E. COVINGTON, GA

PROJECT: KROGER ATLANTA
DATE: 04-01-2019
TYPE: CONSTRUCTION SET

DEMOLITION SLAB AND FLOOR FINISH PLAN

REVISIONS		
NO.	DATE	DESCRIPTION

PROJECT NO: CPS2019-017.4
CAD DWG FILE: CPS2019-017.4-AD1.2
DRAWN BY: MRL
CHKD BY: JMH

AD1.2