



**1 FRONT DEMO ELEVATION**

D2.1 SCALE: 1/8" = 1'-0"

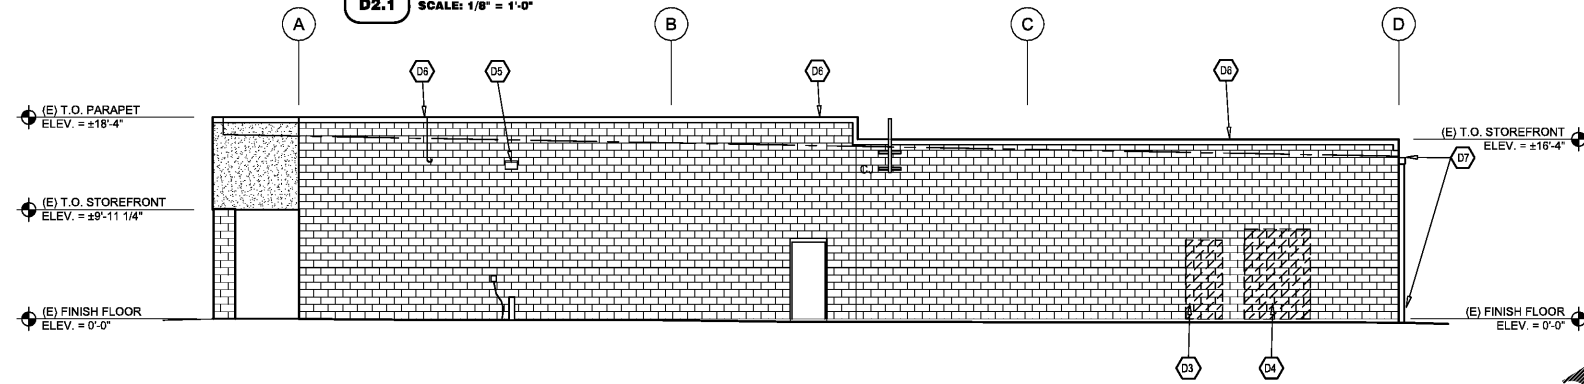


**2 RIGHT DEMO ELEVATION**

D2.1 SCALE: 1/8" = 1'-0"

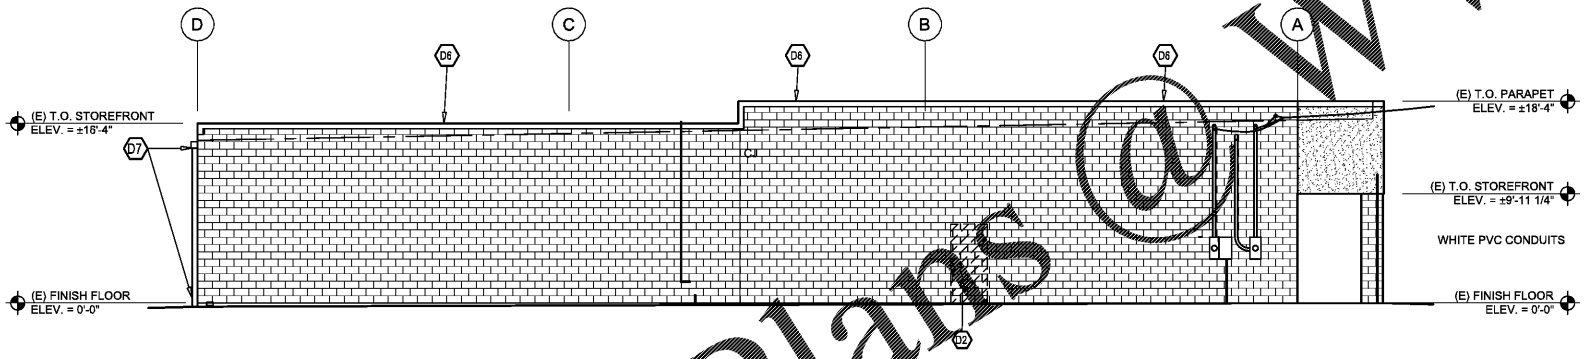

**3 LEFT DEMO ELEVATION**

D2.1 SCALE: 1/8" = 1'-0"

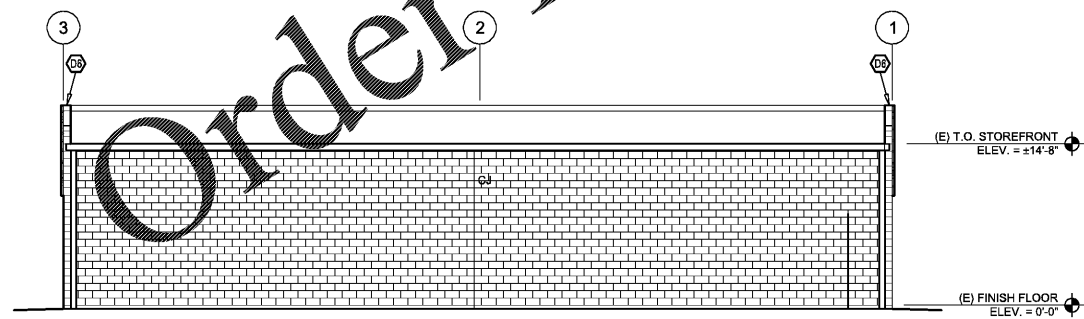

**4 REAR DEMO ELEVATION**


D2.1 SCALE: 1/8" = 1'-0"

**GENERAL DEMOLITION NOTES**

- EXISTING INSULATION:**  
UPON COMPLETION OF DEMOLITION, THE GENERAL CONTRACTOR SHALL CONTACT THE PROFESSIONAL OF RECORD IMMEDIATELY IF KRAFT-FACED INSULATION IS DISCOVERED.
- ADA ACCESSIBLE ENTRY/ EXIT DOOR NOTE:**  
THE GENERAL CONTRACTOR SHALL FIELD VERIFY EXISTING GRADES AND SLOPES AT ALL EXISTING AND NEW EXTERIOR DOOR LOCATIONS. IF CONCRETE WALKWAYS EXIST, THE GENERAL CONTRACTOR TO CONFIRM PRIOR TO DEMOLITION THAT THE NEW DOOR SILL LOCATION IS FLUSH WITH EXISTING WALKWAY / FINISH FLOOR AND SLOPED NOT TO EXCEED 2% IN ALL DIRECTIONS. THE GENERAL CONTRACTOR TO REMOVE AND REPLACE PARTIAL CONCRETE WALKWAY AS REQUIRED TO MEET THE ABOVE CRITERIA. IF THE ABOVE CRITERIA CANNOT BE MET DUE TO FIELD CONDITIONS, THE GENERAL CONTRACTOR IS TO CONSULT THE ARCHITECT FOR POSSIBLE NEW LOCATION OF DOOR OPENING. WHERE CONCRETE WALKWAY DOES NOT EXIST, PROVIDE A 5'-0" WALKWAY EXTENDING OUT FROM BUILDING AND EXTENDING 24" (MIN) BEYOND PULL SIDE OF DOOR AND 1'-0" AT HINGE SIDE OF DOOR WITH SLOPES NOT TO EXCEED 2% IN ALL DIRECTIONS UNLESS NOTED OTHERWISE.
- REMOVE ALL EXISTING SITE CONSTRUCTION AND DELETERIOUS MATERIALS UNLESS OTHERWISE NOTED.
- SEE M.E. DRAWINGS FOR ADDITIONAL DEMOLITION SCOPE AND REQUIREMENTS.
- GENERAL CONTRACTOR TO CONFIRM LOCATIONS OF X-BRACING IN EXTERIOR WALLS.
- SEE A1.1 AND A2.1, 2 FOR NEW WORK AT DEMOLISHED AREAS.

**DEMOLITION KEY NOTES**

- D1 EXISTING STOREFRONT:  
MODIFY EXISTING STOREFRONT FOR NEW ENTRY VESTIBULE.
- D2 NEW SHOWROOM EGRESS DOOR:  
REMOVE PORTION OF EXISTING WALL FOR NEW DOOR OPENING. PROVIDE NEW HEADER. SEE DOOR SCHEDULE.
- D3 NEW MAN DOOR:  
REMOVE PORTION OF EXISTING WALL FOR NEW DOOR. PROVIDE NEW HEADER PER STRUCTURAL. SEE DOOR SCHEDULE.
- D4 NEW OVERHEAD DOOR:  
REMOVE PORTION OF EXISTING WALL FOR NEW OVERHEAD DOOR. PROVIDE NEW HEADER PER STRUCTURAL. SEE DOOR SCHEDULE.
- D5 EXISTING WALL PACK LIGHTS:  
REPLACE EXISTING WITH NEW LED FIXTURE.
- D6 EXISTING ROOF COPING:  
EXISTING METAL PARAPET CAP AND BLOCKING TO BE REMOVED AND REPLACED WITH NEW. SEE DETAILS.
- D7 EXISTING GUTTER AND DOWNSPOUT:  
DEMO EXISTING GUTTER AND DOWNSPOUT SYSTEM. REPLACE WITH NEW. ABANDON EXISTING CATCH BASIN. RUN DOWNSPOUTS ONTO GRADE.
- D8 EXISTING ROOF EQUIPMENT (NOT SHOWN):  
REMOVE ANY UNUSED ROOF EQUIPMENT. MODIFY ANY EXISTING EQUIPMENT TO SIT IN PROTECTIVE SLIP SHEET AND NEW BALLAST.



KYLE W. RADER  
ARCHITECT  
116 N. 2ND AVENUE  
OZARK, MO 65721  
P (417) 581-8889  
F (417) 581-9002

PROJECT:  
**O'REILLY AUTO PARTS REMODEL**  
628 GARDNER BLVD  
HOLLY HILL, SC 29059

**O'Reilly AUTO PARTS**  
CORPORATE OFFICES  
235 SOUTH PATTERSON  
SPRINGFIELD, MISSOURI 65802  
(417) 862-2674 TELEPHONE

DRAWN BY:	CHECKED BY:
MB	SH, KR
DATE:	
03/29/2019	
REVISION:	
PROJECT NUMBER:	
19035-HHL	
SHEET NUMBER:	
<b>D2.1</b>	

Order Plans @ WWW.LDILine.com