

℄ of parking space

NO SCALE

INT'L BARRIER FREE SYMBOL



NO SCALE

NOSE DOWN CURB DETAIL

NOTE:
STRIPING TO BE SOLID WHITE.

NO SCALE

ON-SITE CROSS WALK STRIPING DETAIL



Note: All traffic flow arrows to be solid white reflective traffic paint as per dimensions below.

NO SCALE

TYPICAL PAVEMENT MARKINGS



NO SCALE

TYPICAL PAVEMENT MARKINGS



WHITE LEGEND ON RED BACKGROUND

R1-1

NO SCALE

STOP SIGN DETAIL



BLACK LEGEND ON WHITE BACKGROUND

R3-5R

NO SCALE

RIGHT TURN ONLY SIGN



NO SCALE

SAW CUT DETAIL

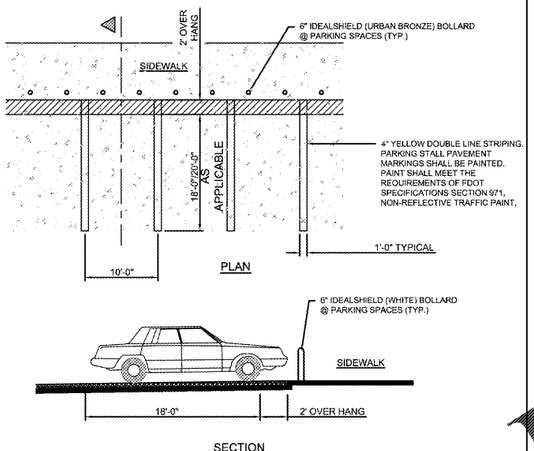

NO SCALE

PARKING DETAIL AT FRONT AND SIDE OF BUILDING

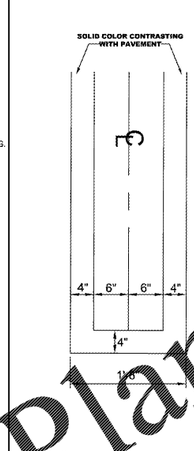

SCALE

PARKING STRIPE DETAIL

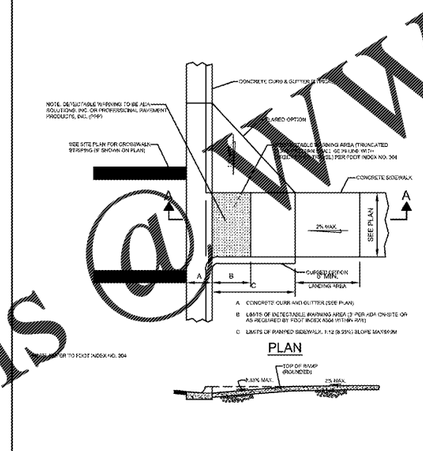

NO SCALE

HANDICAP RAMP DETAIL

NO SCALE

PEDESTRIAN CROSSING SIGN

30" X 30"

STANDARD RED AND WHITE SIGN

R5-1

NO SCALE

DO NOT ENTER SIGN



GENERAL NOTES

1. THE CONCRETE FOR CURBS SHALL BE DEPARTMENT OF TRANSPORTATION CLASS "I" CONCRETE, AND HAVE A COMPRESSIVE STRENGTH OF 2500 PSI.
2. ALL CURBS SHALL HAVE CONTRACTION JOINTS AND SHALL BE CONSTRUCTED AT INTERVALS NOT TO EXCEED 10'- 0" ON CENTERS FOR ALL CURBS.

NO SCALE

SPILL TYPE F CURB AND GUTTER REFERENCE

1-877-903-7246 TRENCHDRAIN SUPPLY www.trenchdrainsupply.com

Number	Series
Z886 HD Channel & Frame	CPZ886HD Channel and Frame Z886 Series

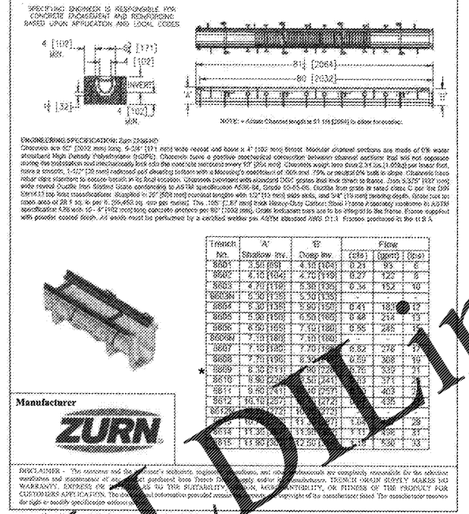
SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES
4 [102] MIN.
4 [102] MIN.
4 [102] MIN.