



**PARTITION NOTES**


- REFER TO FLOOR PLANS FOR LOCATIONS OF PARTITION FIRE RATINGS.
- LABEL ALL RATED PARTITIONS WITH A SIGN STENCILED TO THE PARTITION ABOVE. FINISHED CEILING @ 20 FOOT INTERVALS, TO COMPLY WITH NC BUILDING CODE.
- DO NOT CUT OPENINGS BACK TO BACK IN PARTITION FOR ELECTRICAL OR MECHANICAL ITEMS (E: PHONE, ELEC. OUTLETS, DATA, THERMOSTATS, ETC.)
- INTERIOR PARTITION DIMENSIONS ARE TO THE FACE OF CMU FOR MASONRY PARTITIONS AND TO THE FACE OF GYP. BD. FOR DRYWALL PARTITIONS. FOR CONDITIONS WHERE GYPSUM WALLBOARD ON FURRING IS APPLIED TO CMU, DIMENSIONS ARE TO THE FACE OF CMU.
- CONTRACTOR SHALL FIELD VERIFY ROOM DIMENSIONS PRIOR TO FABRICATION OF CASEWORK AND MILLWORK.
- WHERE CMU WALLS ARE TO RECEIVE CERAMIC TILE, STRIKE JOINTS FLUSH.
- SEE STRUCTURAL DRAWINGS FOR DETAILED INFORMATION (REINFORCING BAR SIZE, ETC.) FOR ALL LINTEL AND BOND BEAMS SHOWN ON ARCHITECTURAL SECTIONS.
- THE CONTRACTOR SHALL COORDINATE WITH ALL OTHER CONTRACTORS REGARDING THE REQUIREMENT FOR WOOD BLOCKING FOR INSTALLATION OF WALL-HUNG ITEMS. THE CONTRACTOR SHALL VERIFY MOUNTING HEIGHTS OF ALL WALL-HUNG & CEILING HUNG ITEMS WITH THE OTHER CONTRACTORS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF ALL WOOD BLOCKING REQUIRED BY ALL CONTRACTORS.
- THE CONTRACTOR SHALL PROVIDE WATER-RESISTANT GYPSUM WALLBOARD AT ALL PARTITIONS RECEIVING GLAZED CERAMIC WALL TILE.

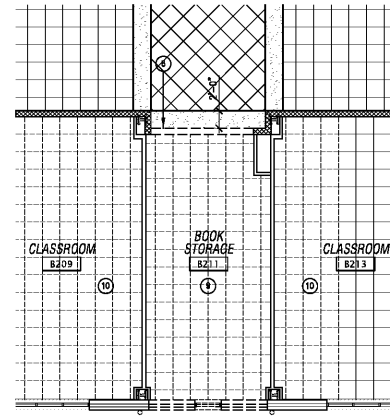


5 Second Floor Demolition Ceiling Plan  
A2.0 Scale: 1/8" = 1'-0"

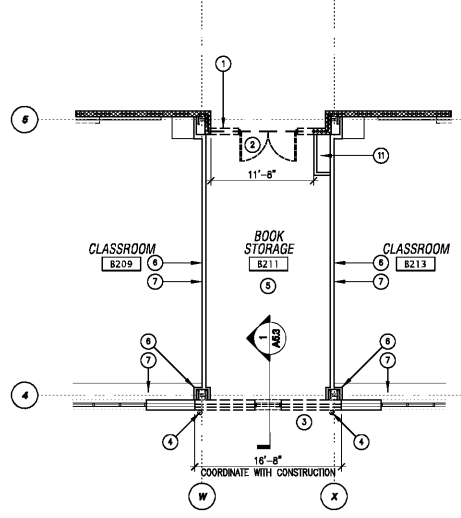

4 Second Floor Demolition Plan  
A2.0 Scale: 1/8" = 1'-0"

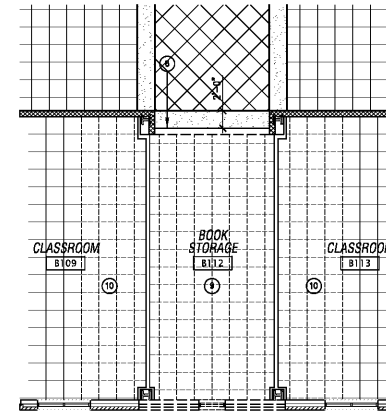


3 First Floor Demolition Ceiling Plan  
A2.0 Scale: 1/8" = 1'-0"

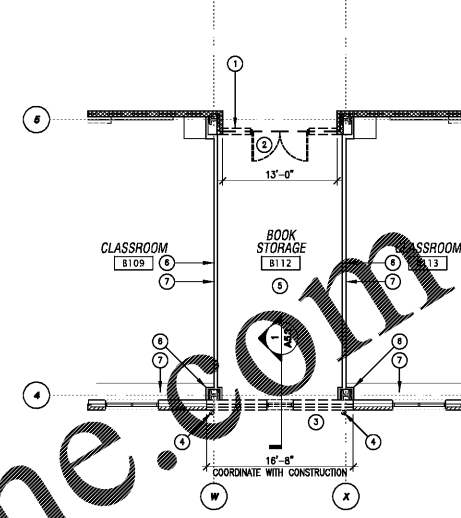


2 First Floor Demolition Plan  
A2.0 Scale: 1/8" = 1'-0"

**DEMOLITION/RENOVATION LEGEND**

- REMOVE EXISTING 1-HOUR RATED CONCRETE MASONRY PARTITION FROM SLAB TO FLOOR/ROOF DECK ABOVE. REMOVE ALL EXISTING FIRE DAMPERS AND OTHER FIRE PENETRATION PROTECTION.
- REMOVE EXISTING DOOR, DOOR FRAME AND DOOR HARDWARE. TURN OVER DOOR AND HARDWARE TO OWNER FOR RELOCATION.
- REMOVE EXISTING EXTERIOR WALL PER 1/AS.3 FROM FOUNDATION TO SLAB. COORDINATE EXTENT OF REMOVAL WITH THE CONSTRUCTION.
- REMOVE EXISTING METAL DOWNSPOUT AND STORE THEM FOR RELOCATION DURING THE CONSTRUCTION PHASE.
- REMOVE EXISTING VCT FLOORING AND RUBBER BASE AND PREPARE SLAB FOR NEW FINISHES.
- EXTEND THE EXISTING METAL-FRAMED DRYWALL PARTITION TO FORM A NEW 1-HOUR FIRE RATED PARTITION. THE PARTITION SHALL EXTEND FROM THE SLAB TO THE UNDERSIDE OF THE FLOOR/ROOF DECK ABOVE. ANY PENETRATIONS THROUGH THIS PARTITION MUST BE PROTECTED TO A ONE HOUR RATING.
- REMOVE TEMPORARILY, IF NEEDED, ANY EXISTING CASEWORK OR EQUIPMENT IN ORDER TO PERFORM ADJACENT CONSTRUCTION.
- THE EXISTING DRYWALL SOFFIT IS TO REMAIN. ONCE THE EXISTING CMU WALL IS DEMOLISHED, COMPLETE THE BALANCE BY TURNING UP A SURFACE SIMILAR TO ADJACENT BALANCEHEADS.
- REMOVE EXISTING ACOUSTICAL TILE CEILING AND CEILING GRID INCLUDING MECHANICAL DIFFUSERS AND LIGHTING FIXTURES. STORE ON SITE FOR POSSIBLE RELOCATION.
- TEMPORARILY REMOVE EXISTING ACOUSTICAL TILE CEILING AND CEILING GRID INCLUDING MECHANICAL DIFFUSERS AND LIGHTING FIXTURES, IF NEEDED, TO PERFORM ADJACENT CONSTRUCTION AND TO RE-IN MECHANICAL PIPING PER THE MECHANICAL DRAWINGS.
- EXISTING DUCT CHASE IS TO REMAIN AS IS. ALL DUCTS, FLOOR DAMPERS AND OTHER MEP COMPONENTS IN THE CHASE SHALL REMAIN AS IS.

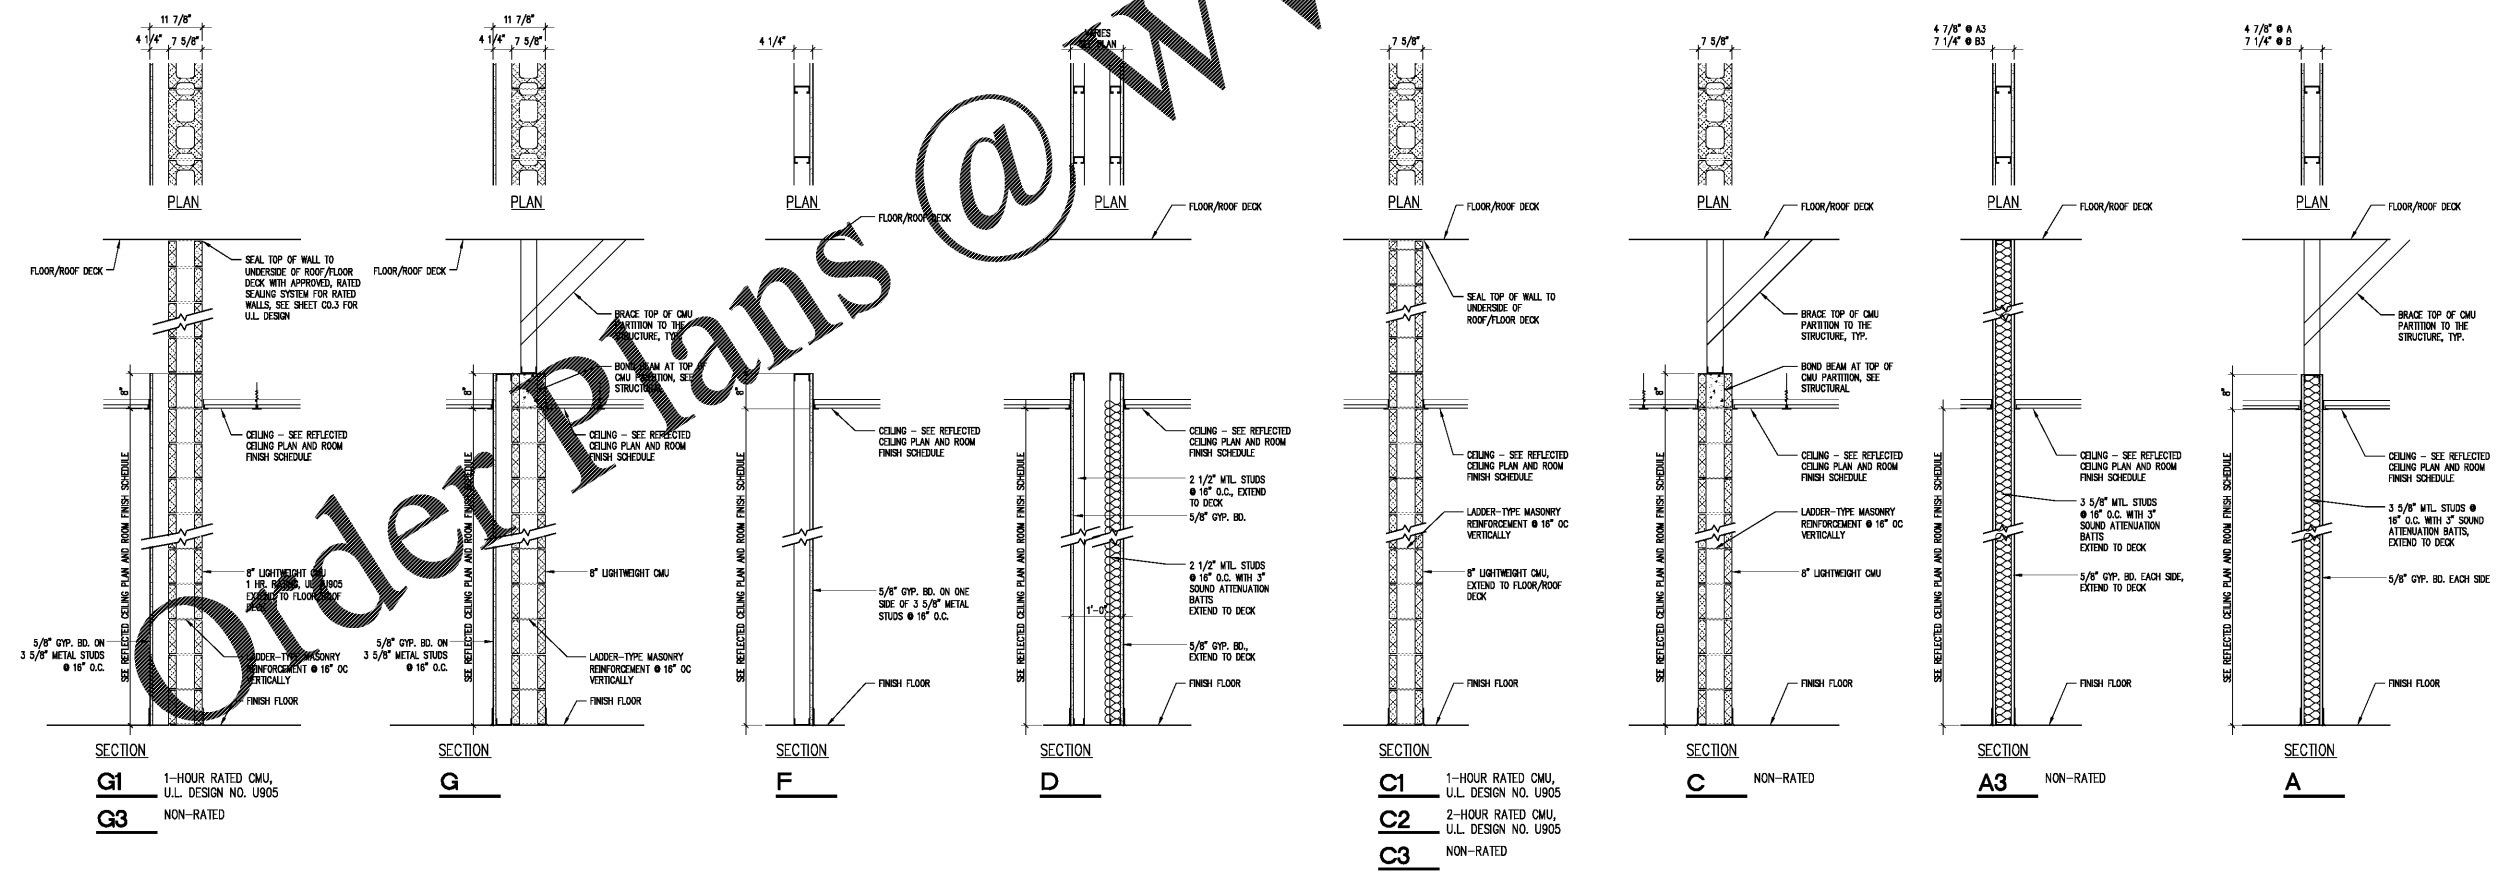

1 Typical Interior Partition Sections  
A2.0 Scale: 3/4" = 1'-0"



Cedar Ridge High School  
Classroom Addition  
Orange County Schools  
1125 New Grady Brown School Road  
Hillsborough, North Carolina

no.	revisions

The use of these plans and specifications shall be restricted to the original site for which they were prepared and maintained. They are not to be used for any other project, modification, or addition by any party. The user of these plans and specifications shall be responsible for obtaining all necessary permits and approvals from the appropriate authorities. The user shall be held responsible for any errors or omissions in these plans and specifications and shall defend and hold the architect, engineer, and architect-engineer harmless from and against all claims, damages, and expenses, including reasonable attorneys' fees, arising from or due to the use of these plans and specifications.

drawn: [initials] checked: [initials]

**Demolition Plans and Partition Schedule**

sheet  
**A2.0**

project no. 1716

date 4/25/19