

GRAPHIC SCALE 1/8"=1'-0"






GRAPHIC SCALE 1/8"=1'-0"

GRAPHIC SCALE 1/8"=1'-0"


THIS DRAWING IS NOT TO BE SCALED FOR DIMENSIONS PURPOSES. THE SCALE VARIATIONS ARE FROM GENERAL MEASUREMENTS ONLY.

PLUMBING FIXTURE SCHEDULE & SPECIFICATIONS									
NO.	ITEM	QUANTITY	UNIT	WAT.	WAS.	TRAP	IN.	DR.	REMARKS
P1	ADA WATER CLOSET FLUSH VALVE TYPE KOHLER MODEL #K-405 COORDINATE COLOR WARCHTECT	1	INT.	2"	2"	INT.	1"	1"	WALL HUNG - SEE ARCH ELEVATIONS
P1A	ADA WATER CLOSET FLUSH VALVE TYPE KOHLER MODEL #K-405-50 COORDINATE COLOR WARCHTECT	1	INT.	2"	2"	INT.	1"	1"	FL. MTD. - 18" TYP. A.F.F. TO RM. SEE NOTE 1
P2	ADA LAVATORY WALL HUNG (1.5 GPM) KOHLER MODEL #K-2810 COORDINATE COLOR WARCHTECT	1	INT.	2"	2"	1 1/4"	1 1/2"	3/8"	WALL HUNG - SEE ARCH ELEVATIONS
P3	URNAL WALL HUNG KOHLER MODEL #K-499-ET COORDINATE COLOR WARCHTECT	1	INT.	2"	2"	INT.	1"	1"	WALL HUNG - SEE ARCH ELEVATIONS
P4	ADA WATER COOLER WALL HUNG ELKAY MODEL #L28RMSVW COORDINATE COLOR WARCHTECT	1	INT.	2"	2"	1 1/4"	1 1/2"	3/8"	WALL HUNG PER ADA REQUIREMENTS
P4A	ADA WATER COOLER WALL HUNG ELKAY MODEL #L28RMSVW COORDINATE COLOR WARCHTECT	1	INT.	2"	2"	1 1/4"	1 1/2"	3/8"	WALL HUNG PER ADA REQUIREMENTS
P5	SINK SENSITIVE ROOM INTEGRAL WITH COUNTER TOP ONE COMPARTMENT	1	INT.	2"	2"	1 1/2"	1 1/2"	3/8"	INTEGRAL WITH COUNTER TOP
P6	JANITOR SINK FLOOR MOUNTED BRAY MODEL #782011	1	INT.	3"	2"	3"	1 1/2"	3/8"	FLOOR MOUNTED FAUCET AT 4" A.F.F.
P7	ADA SAFETY SHOWER EYE WASH GUARDIAN MODEL #68154 STAINLESS STEEL CORRECT CONNECT EYE WASH WASTE	1	F.O.	-	-	-	1"	1"	FLOOR MOUNTED
P8	EYE WASH GUARDIAN MODEL #65028P DECK MOUNTED	1	-	-	-	-	1 1/2"	1 1/2"	DECK MOUNTED
P9	HOSE BIBB INTERIOR WOODFORD #24 CH LOOSE KEY	1	-	-	-	-	1 1/2"	-	WALL MOUNTED 18" A.F.F.
P9A	HOSE BIBB EXTERIOR FREEZELESS WOODFORD MODEL #807	1	-	-	-	-	3/4"	-	WALL MOUNTED 18" A.F.F. GRADE
P10	FLOOR DRAIN SMOU CHEF MODEL #103-SD1024M TRINGLINE - DUCTILE CAST IRON	1	-	-	-	-	-	-	MTD FLUSH WITH FLOOR
P10A	FLOOR DRAIN MECHANICAL ROOM SMOU CHEF MODEL #103-SD1024M TRINGLINE - DUCTILE CAST IRON	1	-	-	-	-	-	-	MTD FLUSH WITH FLOOR
P11	CLEANOUT FLOOR SMOU CHEF MODEL #104-SD1040M TRINGLINE - DUCTILE CAST IRON	1	PIPE SIZE	-	-	-	-	-	MTD FLUSH WITH FLOOR
P11A	CLEANOUT EXTERIOR SMOU CHEF MODEL #104-SD1040M TRINGLINE - DUCTILE CAST IRON	1	4"	-	-	-	-	-	SEE EXTERIOR DOUBLE CLEANOUT DETAIL

- GENERAL PLUMBING NOTES**
- THIS CONTRACTOR SHALL VERIFY THE EXACT LOCATIONS AND PLACEMENTS OF PLUMBING FIXTURES AND EQUIPMENT WITH SITE AND ARCHITECTURAL DRAWINGS, INCLUDING PERFECTED CEILING PLANS, INTERIOR ELEVATIONS, DETAILS, AND SECTIONS, PRIOR TO ROUGH-IN OR RELOCATE AS DIRECTED BY THE DESIGNER AT NO ADDITIONAL COST TO THE OWNER.
  - ALL PIPING, FITTINGS, EQUIPMENT, ETC. SHOWN ON THESE DRAWINGS SHALL BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE STATE AND LOCAL CODE REQUIREMENTS.
  - ALL PIPING, SLEEVES, INSERTS, AND OTHER ROUGH-IN MATERIALS SHALL BE INSTALLED AS BUILDING CONSTRUCTION PROGRESSES.
  - PIPE HANGERS SHALL BE SIZED SO THAT INSULATION IS CONTINUOUS AT ALL HANGERS.
  - THIS CONTRACTOR SHALL COORDINATE WITH ALL OTHER CONTRACTORS AND TRADES TO LOCATE HIS WORK TO AVOID CONFLICTS.
  - ALL VENTS THROUGH THE ROOF SHALL BE CONSIDERED AS PRACTICAL AND ALLOWED BY CODE, AND PENETRATE THE ROOF ON THE BACK SIDE OF THE BUILDING WHERE PRACTICAL. THIS CONTRACTOR SHALL COORDINATE DETAILS OF FLASHINGS AND FINISHING WITH THE ROOFING INSTALLER. ALL VENTS THROUGH THE ROOF SHALL BE LOCATED AT LEAST THE MINIMUM DISTANCE AWAY FROM AIR INTAKES AS REQUIRED BY CODE.
  - EXISTING SERVICES INDICATED ON THESE DRAWINGS WERE REPRODUCED FROM EXISTING DRAWINGS AND LIMITED SITE OBSERVATION/VERIFICATION. THESE DRAWINGS MAY NOT BE ALL INCLUSIVE OF SERVICES THAT EXIST IN THE AREA OF WORK. CONTRACTOR TO FIELD VERIFY EXISTING CONDITIONS AND LOCATIONS PRIOR TO CONSTRUCTION. ANY DIFFERENCE THAT IMPACT WORK SHOWN ON THESE DRAWINGS SHALL BE REPORTED TO THE ARCHITECT/ENGINEER FOR COORDINATION PRIOR TO CONSTRUCTION.
  - CLEAN OUTS SHALL BE INSTALLED WHERE SHOWN AND WHERE REQUIRED BY CODE.
  - THIS CONTRACTOR SHALL PROVIDE AND INSTALL ALL OFFSETS, FITTINGS, VALVES, AND ACCESSORIES THAT MAY BE REQUIRED FOR A COMPLETE AND PROPER INSTALLATION, OR RECOMMENDED BY THE EQUIPMENT MANUFACTURER, WHETHER OR NOT THEY ARE SPECIFICALLY SHOWN OR SPECIFIED.
  - INSTALL ALL PIPING INSIDE OF THERMAL ENVELOPE. SEE ARCHITECTURAL DRAWINGS.
  - INSTALL BALL VALVE STOPS ON ALL FIXTURE HOT WATER AND COLD WATER SUPPLIES.
  - ALL FLOOR / HUB DRAINS TO HAVE CORRESPONDING SIZE "SURE SEAL" TRAP SEAL.
  - ALL NEW UNDERGROUND PLUMBING AND PIRE PROTECTION SHALL BE EXTENDED TO 5'-0" OUTSIDE OF THE BUILDING FOOTING WHERE NEAREST TRADE WILL CONNECT TO OR EXTEND PIPING.
  - ALL EQUIPMENT CONNECTIONS SHALL BE COORDINATED WITH EQUIPMENT DRAWINGS AND EQUIPMENT MANUFACTURER'S INSTALLATION INSTRUCTIONS. PROVIDE ALL NECESSARY PIPING, SHUT-OFF VALVES, P.S.P.S., ETC. REQUIRED TO INSTALL EQUIPMENT AND MAKE FINAL CONNECTIONS.
  - NO "DOUBLE WIRE" FITTINGS PERMITTED ON HORIZONTAL WASTE PIPING.
  - PROVIDE AND INSTALL SHOCK ARRESTOR PROTECTION FOR ALL FLUSH VALVES AND LINES AND QUICK CLOSING VALVES PER MANUFACTURER'S INSTRUCTIONS.
  - ALL DOMESTIC WATER PIPE, TRAP, AND FITTINGS TO BE LEAD-FREE.

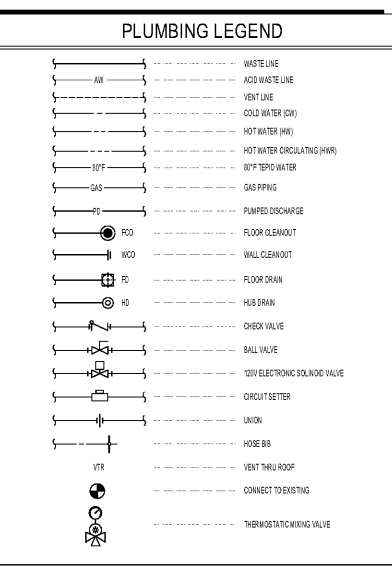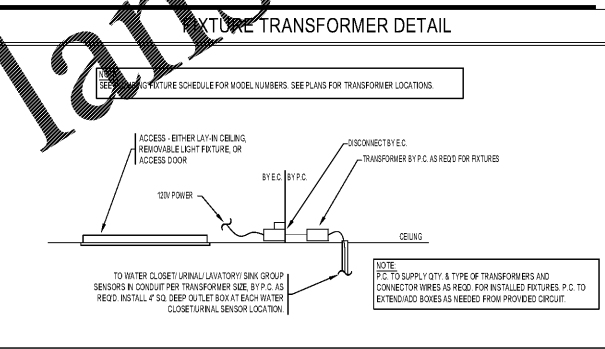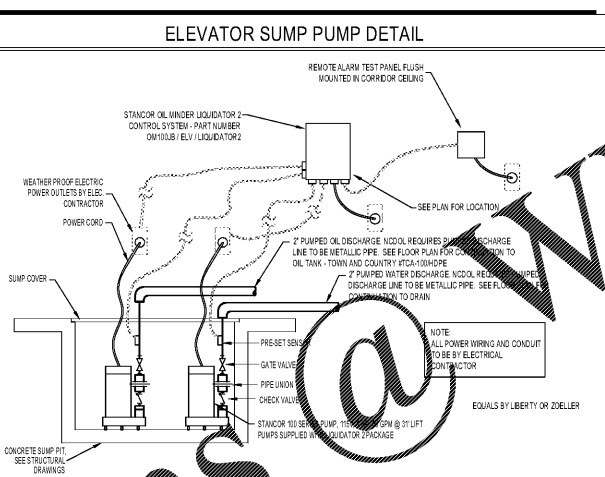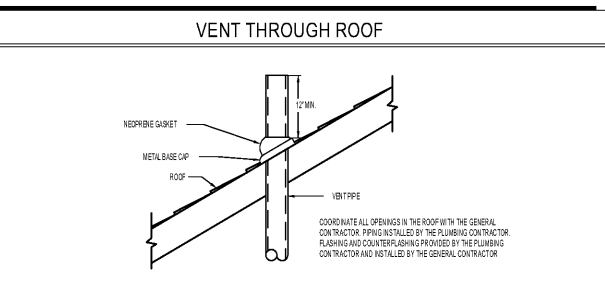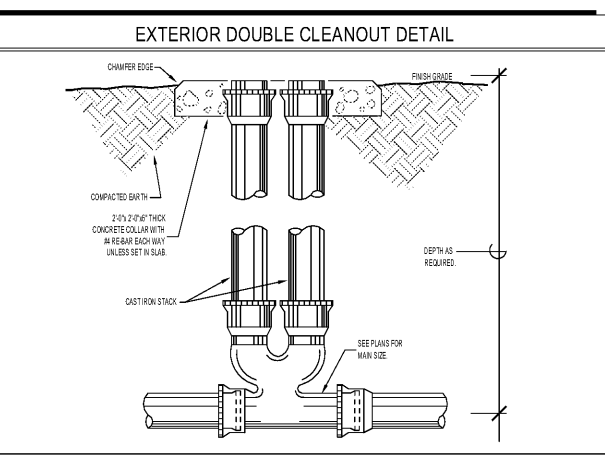

Order Plans @




222 cloister court chapel hill, nc 27514 919.401.8586 www.cra-oe.com



Reece, Noland & McElrath, Inc. 18 Main Street, Clinton, North Carolina 28716



Cedar Ridge High School Classroom Addition Orange County Schools 1125 New Grady Brown School Road Hillsborough, North Carolina



no.	revisions

The user of these plans and specifications shall be responsible for the accuracy of the original data and shall be responsible for any omissions or errors in the original data and shall be responsible for any omissions or errors in the original data.

drawn	checked
JRW	JPO

Plumbing Details, Notes, and Schedules

sheet

P0.1

project no. 1716

date 4/25/19