

KPS GLOBAL PREFABRICATION
WALK-IN FREEZER/COOLER UNIT



NSF LABEL			
PANEL THICKNESS	3 1/2"	4"	5"
(U) VALUE=U/R 'R' VALUE	25	32	40
WALL AND FILTRATION LOAD ONLY PRODUCT PULL DOWN LOAD NOT INCLUDED AMBIENT ESTIMATED AT 75° FOR INDOOR AND 100° FOR OUTDOOR WALK-INS		REFRIGERATION PROVIDED	
ROOM NAME	BTU/HR	YES	NO
COOLER	4,760		
FREEZER	5,120	X	

kps GLOBAL ENGINEERING BULLETIN NO: 6415
SUBJECT: NSF LABELING DATE: April 4, 2016

The National Sanitation Foundation (NSF) in accordance with Standards 7 and 51 establishes minimum food protection and sanitation requirements for the materials, design, manufacture construction and performance of walk-in coolers and freezers and their related components. An NSF inspector audits each of our facilities every three months.

When specified on the drawings, an NSF label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used.

A standard NSF label is applied to units with panels and refrigeration supplied by KPS Global. An NSF "COMPONENT" label is applied when panels only are supplied by KPS Global and the refrigeration is supplied by someone else.





When specified on the drawings, a "PACKAGED PRODUCT ONLY" label is used.

kps GLOBAL ENGINEERING BULLETIN NO: 6420
SUBJECT: ETL ELECTRICAL LABELING DATE: April 15, 2016

ETL Testing Laboratories has conducted tests and evaluation of KPS Global wiring methods and installation in accordance with UL-724 for surface burning characteristics, UL also conducted tests for Canadian Classification in accordance with CANULC-S102 AND UL6009-C376. A UL inspector audits each of our facilities every three months.

An ETL label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used and to each corner panel (five labels per unit).

A separate Procedures Manual is included as part of the ETL listing program. Each facility has a separate label and listing number.





kps GLOBAL ENGINEERING BULLETIN NO: 6423
SUBJECT: UL LABELING DATE: April 15, 2016

Underwriters Laboratories (UL) has conducted flammability tests on KPS Global products in accordance with UL-724 for surface burning characteristics. UL also conducted tests for Canadian Classification in accordance with CANULC-S102 AND UL6009-C376. A UL inspector audits each of our facilities every three months.

When specified on the drawings, an UL label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used and to each corner panel (five labels per unit).

A separate Procedures Manual is included as part of the UL listing program. Each facility has a separate label.



L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com

PTN042H6AE


Project: Dollar Tree Stores	QUOTATION:
Location: Various	Submitted by: Mike S. Jarrell
Customer: Various	DATE: 7/9/2015
Model #: Various	By: Various
Tag: Cooler	For Record: <input type="checkbox"/> For Approval: <input type="checkbox"/>

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / FR / Hz	MCA*	MOP†	Units Altitude	NEMA Receptacle	APPROX. NET WEIGHT	NetWt. Charge (OZ)
R404A	340	115/1/60	11.3	15	0-3	5-20R	92	1.6

CAPACITY (BTUH)

+35°F Room	+20°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT CAPACITY (BTUH) at 95°F Ambient
4360	4570	0	0	0	

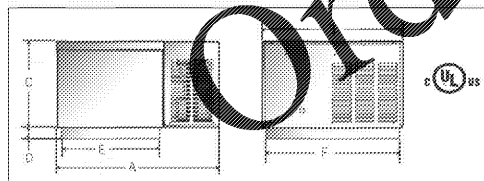

DIMENSIONS (inches)

A	B	C	D	E	F	G	H	I	J	K
28.1	24.4	15.3	4	14.1	20.4					

DIMENSIONS (inches)

L	M	N	O	P	Q	R	S	T	U	V	W

WALK-IN COOLER SHEET 1 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com

PTN042H6AE


Project: Dollar Tree Stores	QUOTATION:
Location: Various	Submitted by: Mike S. Jarrell
Customer: Various	DATE: 7/9/2015
Model #: Various	By: Various
Tag: Cooler	For Record: <input type="checkbox"/> For Approval: <input type="checkbox"/>

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / FR / Hz	MCA*	MOP†	Units Altitude	NEMA Receptacle	APPROX. NET WEIGHT	NetWt. Charge (OZ)
R404A	340	115/1/60	11.3	15	0-3	5-20R	92	1.6

CAPACITY (BTUH)

+35°F Room	+20°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT CAPACITY (BTUH) at 95°F Ambient
4360	4570	0	0	0	

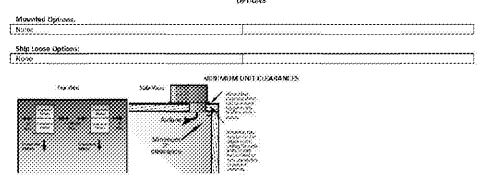

DIMENSIONS (inches)

A	B	C	D	E	F	G	H	I	J	K
28.1	24.4	15.3	4	14.1	20.4					

DIMENSIONS (inches)

L	M	N	O	P	Q	R	S	T	U	V	W

WALK-IN COOLER SHEET 2 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com

PTN052L6BE


Project: Dollar Tree Stores	QUOTATION:
Location: Various	Submitted by: Mike S. Jarrell
Customer: Various	DATE: 7/9/2015
Model #: Various	By: Various
Tag: Freezer	For Record: <input type="checkbox"/> For Approval: <input type="checkbox"/>

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / FR / Hz	MCA*	MOP†	Units Altitude	NEMA Receptacle	APPROX. NET WEIGHT	NetWt. Charge (OZ)
R404A	900	208-230/1/60	16.1	20	15-3	6-20R	275	45

CAPACITY (BTUH)

+35°F Room	+20°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT CAPACITY (BTUH) at 95°F Ambient
0	0	7600	5360	3910	

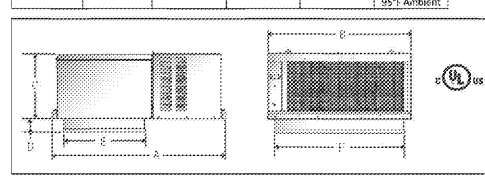

DIMENSIONS (inches)

A	B	C	D	E	F	G	H	I	J	K
52	47	19	4	74.75	38.25					

DIMENSIONS (inches)

L	M	N	O	P	Q	R	S	T	U	V	W

SSF = Saturated Suction Temperature

WALK-IN FREEZER SHEET 1 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com

PTN052L6BE


Project: Dollar Tree Stores	QUOTATION:
Location: Various	Submitted by: Mike S. Jarrell
Customer: Various	DATE: 7/9/2015
Model #: Various	By: Various
Tag: Freezer	For Record: <input type="checkbox"/> For Approval: <input type="checkbox"/>

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / FR / Hz	MCA*	MOP†	Units Altitude	NEMA Receptacle	APPROX. NET WEIGHT	NetWt. Charge (OZ)
R404A	900	208-230/1/60	16.1	20	15-3	6-20R	275	45

CAPACITY (BTUH)

+35°F Room	+20°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT CAPACITY (BTUH) at 95°F Ambient
0	0	7600	5360	3910	

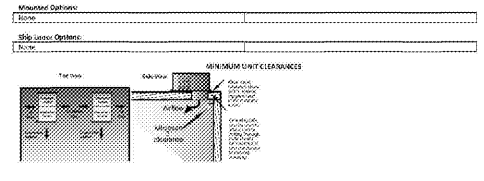

DIMENSIONS (inches)

A	B	C	D	E	F	G	H	I	J	K
52	47	19	4	74.75	38.25					

DIMENSIONS (inches)

L	M	N	O	P	Q	R	S	T	U	V	W

SSF = Saturated Suction Temperature

WALK-IN FREEZER SHEET 2 OF 2

- GENERAL NOTES:
- THE PROPOSED FREEZER/COOLER UNIT SIZE IS INDICATED ON FLOOR PLAN.
 - ALL WALK-IN & MERCHANDISING UNITS ARE SELF CONTAINED AND DO NOT REQUIRE A FLOOR DRAIN.
 - REFER TO SPECIFICATIONS
 - INSTALLATION OF THESE NSF, ETL & UL LISTED UNITS SHALL COMPLY WITH ALL STATE AND LOCAL CODES PER APPROVED PLANS.

FOR REFERENCE ONLY

FOR INFORMATION ONLY

REFRIGERATION SPECIFICATIONS

D63