



KPS GLOBAL PREFABRICATION
WALK-IN FREEZER/COOLER UNIT

kps GLOBAL ENGINEERING BULLETIN NO: 6415
SUBJECT: NSF LABELING DATE: April 11, 2015

The National Sanitation Foundation (NSF) in accordance with Standards 7 and 51 establishes minimum food protection and sanitation requirements for the materials, design, manufacture construction and performance of walk-in coolers and freezers and their related components. An NSF inspector audits each of our facilities every three months.

When specified on the drawings, an NSF label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used.

A standard NSF label is applied to units with panels and refrigeration supplied by KPS Global. An NSF "COMPONENT" label is applied when panels only are supplied by KPS Global and the refrigeration is supplied by someone else.

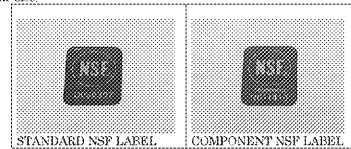

When specified on the drawings, a "PACKAGED PRODUCT ONLY" label is used.

kps GLOBAL ENGINEERING BULLETIN NO: 6420
SUBJECT: ETL ELECTRICAL LABELING DATE: April 15, 2014

ETL Testing Laboratories has conducted tests and evaluation of KPS Global wiring methods and installation in accordance with UL-471, CAN/CSA C22.2 and the National Electrical Code, NFPA 70. An ETL inspector audits each of our facilities every three months.

An ETL label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to any factory installation of wiring or conduit.

A separate Procedures Manual is included as part of the ETL listing program. Each facility has a separate label and listing number.

KPS Global
ETL LISTING NO. 148740000, 120, 74417
HEATER RATING: FREEZER DOOR ONLY
5.0 AMPS MAX
LIGHT RATINGS
LIGHT FIXTURES MAY BE PROVIDED BY KPS GLOBAL OR MAY BE PROVIDED BY OTHERS.
THE SWITCH PROVIDED IS SUITABLE FOR 15 AMP CIRCUIT. MAXIMUM FIXTURE LOAD MUST BE BASED ON THE REQUIREMENTS OF THE NEC.

KPS Global
ETL LISTING NO. 148740000, 120, 74417
HEATER RATING: FREEZER DOOR ONLY
5.0 AMPS MAX
LIGHT RATINGS
LIGHT FIXTURES MAY BE PROVIDED BY KPS GLOBAL OR MAY BE PROVIDED BY OTHERS.
THE SWITCH PROVIDED IS SUITABLE FOR 15 AMP CIRCUIT. MAXIMUM FIXTURE LOAD MUST BE BASED ON THE REQUIREMENTS OF THE NEC.

kps GLOBAL ENGINEERING BULLETIN NO: 6423
SUBJECT: UL LABELING DATE: April 11, 2014

Underwriters Laboratories (UL) has conducted flammability tests on KPS Global products in accordance with UL-723 for surface burning characteristics. UL also conducted tests for Canadian Classification in accordance with CANULC-S102 AND ULCOORD-C376. A UL inspector audits each of our facilities every three months.

When specified on the drawings, an UL label is applied to the interior of the door section, latch side or to the interior of the panel adjacent to an opening when a door section is not used and to each corner panel (five labels per unit).

A separate Procedures Manual is included as part of the UL listing program. Each facility has a separate label.

UL LISTING SURFACE BURNING CHARACTERISTICS
UL 723ASTM E-84 CLASS 1
PAINTED OR NON-PAINTED STEEL PANELS
UL CLASSIFICATION: 25/0-100
UL LISTING NO. 148740000, 120, 74417

UL LISTING SURFACE BURNING CHARACTERISTICS 30/0-15
INSULATED BULLDOGS PANELS
LISTED IN ACCORDANCE WITH CANULC-S118
See ULG list of equipment and materials, Building Materials Directory
COMPOSITE PANELS
LISTED IN ACCORDANCE WITH CANULC-S102 AND S127
UL LISTING NO. 148740000, 120, 74417
PAINTED OR NON-PAINTED STEEL PANELS
UL CLASSIFICATION: 25/0-100
UL LISTING NO. 148740000, 120, 74417

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com
PTN042H6AE


Project:	Dollar Tree Stores	QUOTATION:	
Location:	Various	Submitted by:	Mike S. Jarrell
Customer:		DATE:	7/9/2015
Model #:	Cooler	For Record:	<input type="checkbox"/>
Tag:	Cooler	For Approval:	<input type="checkbox"/>

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA1	MOPF	LINE Amps	NEMA Receptacle	APPROX. NET WEIGHT (LBS)	Refrig. Charge (LBS)
R404A	340	115/1/60	21.3	15	9.3	5-20R	52	14

CAPACITY (BTUH)

+35°F Room	+30°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP (BTUH) CAPACITY (BTUH) @ 95°F Ambient
4360	4576	0	0	0	

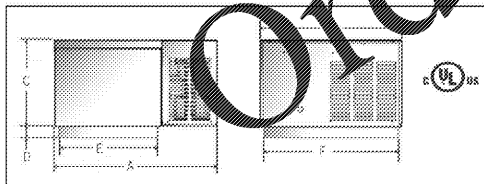

DIMENSIONS (Inches)

A	B	C	D	E	F	G	H	I	K
28.1	24.4	15.3	4	34.1	20.4				

DIMENSIONS (Inches)

L	M	N	P	R	S	T	U	V	W

WALK-IN COOLER SHEET 1 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com
PTN042H6AE


Project:	Dollar Tree Stores	QUOTATION:	
Location:	Various	Submitted by:	Mike S. Jarrell
Customer:		DATE:	7/9/2015
Model #:	Cooler	For Record:	<input type="checkbox"/>
Tag:	Cooler	For Approval:	<input type="checkbox"/>

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA1	MOPF	LINE Amps	NEMA Receptacle	APPROX. NET WEIGHT (LBS)	Refrig. Charge (LBS)
R404A	340	115/1/60	21.3	15	9.3	5-20R	52	14

CAPACITY (BTUH)

+35°F Room	+30°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP (BTUH) CAPACITY (BTUH) @ 95°F Ambient
0	0	7000	5860	3910	

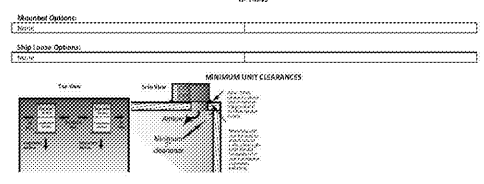

DIMENSIONS (Inches)

A	B	C	D	E	F	G	H	I	K
52.42	19	4	24.25	30.25					

DIMENSIONS (Inches)

L	M	N	P	R	S	T	U	V	W

WALK-IN COOLER SHEET 2 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com
PTN052L6BE


Project:	Dollar Tree Stores	QUOTATION:	
Location:	Various	Submitted by:	Mike S. Jarrell
Customer:		DATE:	7/9/2015
Model #:	Freezer	For Record:	<input type="checkbox"/>
Tag:	Freezer	For Approval:	<input type="checkbox"/>

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA1	MOPF	LINE Amps	NEMA Receptacle	APPROX. NET WEIGHT (LBS)	Refrig. Charge (LBS)
R404A	900	230/1/60	38.1	20	15.3	6-20R	275	45

CAPACITY (BTUH)

+35°F Room	+30°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP (BTUH) CAPACITY (BTUH) @ 95°F Ambient
0	0	7000	5860	3910	

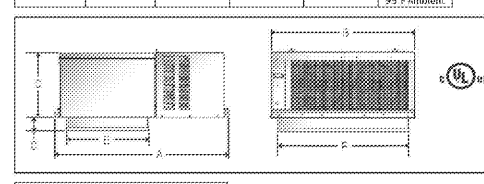

DIMENSIONS (Inches)

A	B	C	D	E	F	G	H	I	K
52.42	19	4	24.25	30.25					

DIMENSIONS (Inches)

L	M	N	P	R	S	T	U	V	W

SST = Saturated Section Temperature

WALK-IN FREEZER SHEET 1 OF 2

L A Brand of Heatcraft Refrigeration Products
2175 West Park Place Boulevard
Stone Mountain, GA 30087
800.537.7775
www.larkinproducts.com
PTN052L6BE


Project:	Dollar Tree Stores	QUOTATION:	
Location:	Various	Submitted by:	Mike S. Jarrell
Customer:		DATE:	7/9/2015
Model #:	Freezer	For Record:	<input type="checkbox"/>
Tag:	Freezer	For Approval:	<input type="checkbox"/>

PHYSICAL & ELECTRICAL & CAPACITY DATA

REFRIGERANT	EVAPORATOR CFM	POWER SUPPLY Volts / Ph / Hz	MCA1	MOPF	LINE Amps	NEMA Receptacle	APPROX. NET WEIGHT (LBS)	Refrig. Charge (LBS)
R404A	900	230/1/60	38.1	20	15.3	6-20R	275	45

CAPACITY (BTUH)

+35°F Room	+30°F Room	0°F Room	-10°F Room	-20°F Room	AMBIENT TEMP (BTUH) CAPACITY (BTUH) @ 95°F Ambient
0	0	7000	5860	3910	

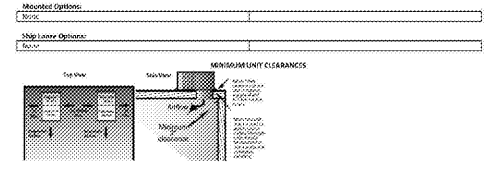

DIMENSIONS (Inches)

A	B	C	D	E	F	G	H	I	K
52.42	19	4	24.25	30.25					

DIMENSIONS (Inches)

L	M	N	P	R	S	T	U	V	W

SST = Saturated Section Temperature

WALK-IN FREEZER SHEET 2 OF 2

- GENERAL NOTES:
- THE PROPOSED FREEZER/COOLER UNIT SIZE IS INDICATED ON FLOOR PLAN.
 - ALL WALK-IN & MERCHANDISING UNITS ARE SELF CONTAINED AND DO NOT REQUIRE A FLOOR DRAIN.
 - REFER TO SPECIFICATIONS.
 - INSTALLATION OF THESE NSF, ETL & UL LISTED UNITS SHALL COMPLY WITH ALL STATE AND LOCAL CODES PER APPROVED PLANS.

FOR REFERENCE ONLY

project drawings

DS3

FOR INFORMATION ONLY

description by mark date revisions