


1 FP - MEZZANINE PIPING PLAN
SCALE: 1/8" = 1'-0"

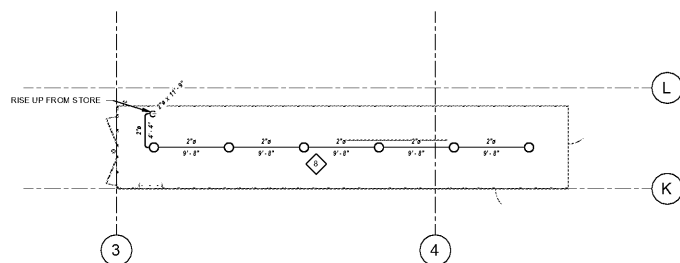

2 FP - MECHANICAL CENTER
SCALE: 1/8" = 1'-0"

DRAWING NOTES

- ◆ PENDANT SPRINKLER HEAD IN CEILING (TYPICAL)
- ◆ DRY PENDANT SPRINKLER HEAD IN COOLERS AND FREEZERS (TYPICAL)
- ◆ SEE DRAWING FP-11 FOR INFORMATION ON THE UPRIGHT SPRINKLERS IN THE MEAT SERVICE
- ◆ PROVIDE SPRINKLER HEAD PROTECTION BELOW ALL REFRIGERANT PIPE GROUPINGS GREATER THAN 4 IN. WIDTH
- ◆ FREEZER AND COOLER SPRINKLER HEADS SHALL BE POSITIONED TO ACHIEVE MINIMUM CLEARANCE FROM EVAPORATOR COOLING UNITS AND LED LUMINAIRES (TYPICAL)
- ◆ PROVIDE 200°F RATED SPRINKLER (K-8.0) STP REFRIGERANT PIPE COOLING UNITS
- ◆ PROVIDE DRAIN VALVES AT TRAPPED SECTIONS OF PIPE
- ◆ THE MECHANICAL ROOM IS DESIGNED AND BUILT FOR REFRIGERANT COOLING UNIT SUPPLIER. THE LAYOUT IS NOT FINAL UNTIL THE UNIT IS CONSTRUCTED. UNLESS OTHERWISE NOTED, THE LAYOUT OF ADDITIONAL SPRINKLERS AND HEADS SHALL BE DETERMINED BY THE SUPPLIER. THE LAYOUT OF ADDITIONAL SPRINKLERS AND HEADS SHALL BE DETERMINED BY THE SUPPLIER.

Order Plans @ www.LDILine.com

PLOT DATE:
August 21 2018

No.	Description	Date

STORE NUMBER
1687
Tattersall Park
US 280 & Highway 19
Hoover
Shelby Co., AL

48.10
V1814.2018
SIENNA LITE

FIRE
PROTECTION
PLAN -
MEZZANINE

As indicated

FP1.3

PERMIT SET DATE: 8/29/2018 11:25:04 AM