

G.C. TO FIELD VERIFY ALL DIMENSIONS AND REPORT ANY DISCREPANCIES TO ARCHITECT IMMEDIATELY. PROVIDE COLUMN TO COLUMN AND OVERALL DIMENSIONS TO ULTA'S PROJECT MANAGER UPON VERIFICATION.


RGLA

rgla solutions, inc.
5100 River Road, Ste 125
Schiller Park, IL 60176
p. 847.671.4200
f. 847.671.4202
www.rgla.com

REVISIONS	DATE
LL & ULTA REVIEW	09/03/2019
3D ISSUE	09/03/2019
PERMIT ISSUE	09/04/2019

robert g. lyon + associates, inc.
1111 S. Wacker Drive, Suite 1100
Chicago, IL 60606
5100 River Road, Ste 125
Schiller Park, IL 60176
p. 847.671.4200
f. 847.671.4202
www.rgla.com

WWW.LDILINE.COM

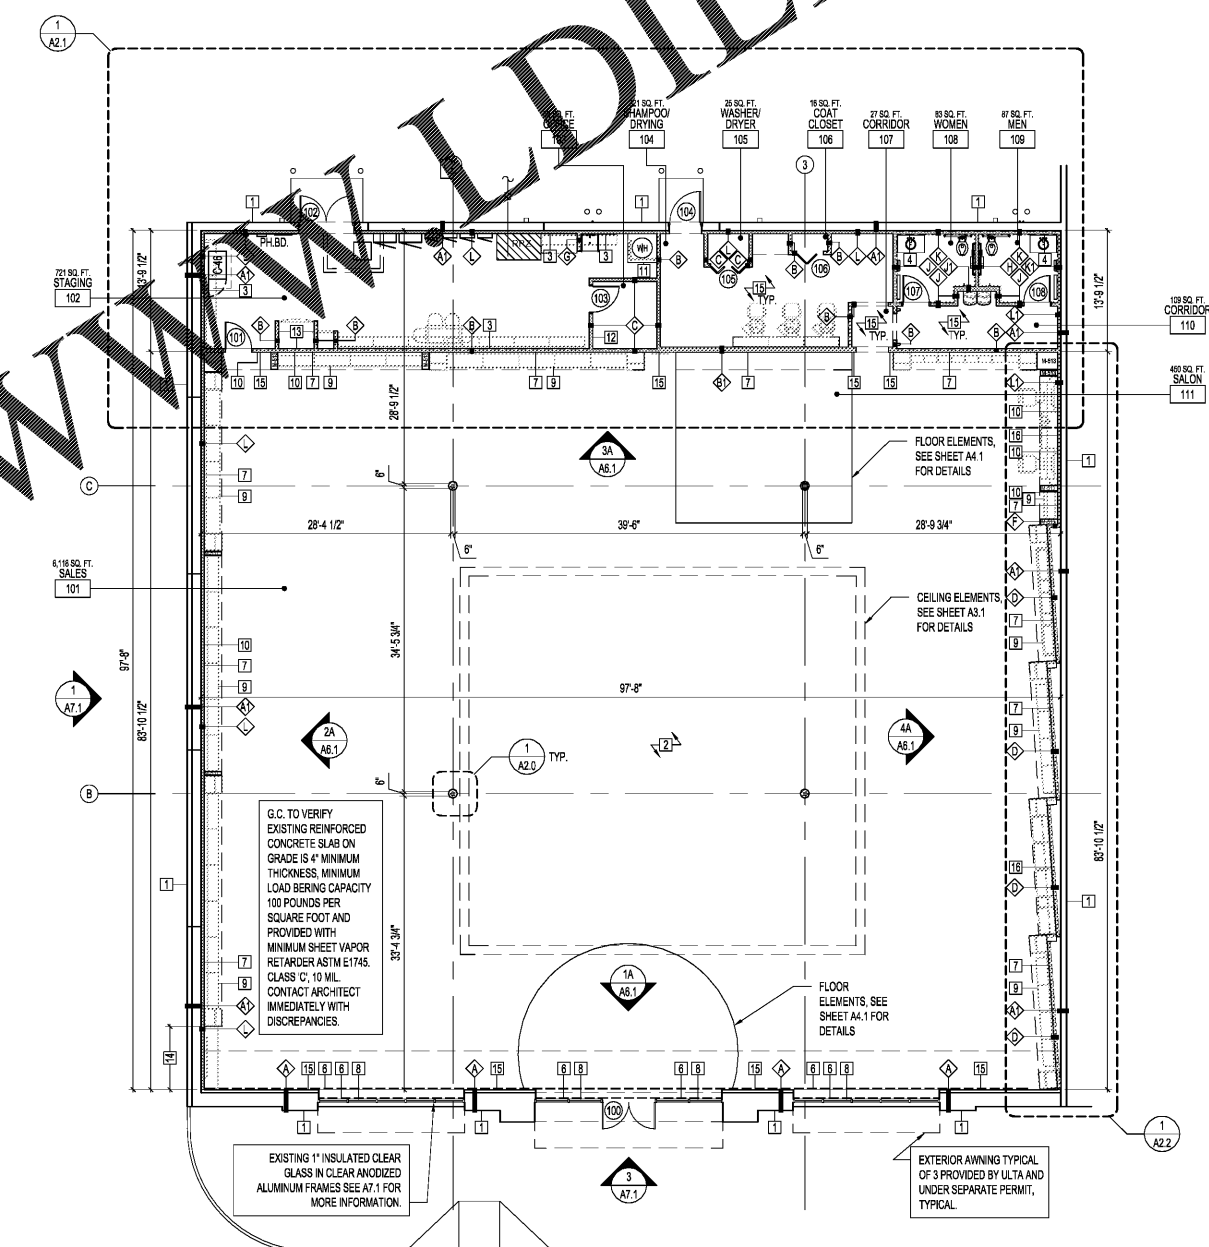

SCALE:
THE ABOVE DRAWINGS AND SPECIFICATIONS SHALL BE CONSIDERED AS REPRESENTATIVE OF THE PROJECT AND NO PART THEREOF SHALL BE CONSIDERED TO BE A CONTRACT DOCUMENT UNLESS SPECIFICALLY REFERENCED IN THE CONTRACT DOCUMENTS. VISUAL CONTACT WITH THE CONTRACTOR SHALL BE REQUIRED TO VERIFY THE ACCURACY OF THE INFORMATION PROVIDED HEREIN. VISUAL CONTACT WITH THE CONTRACTOR SHALL BE REQUIRED TO VERIFY THE ACCURACY OF THE INFORMATION PROVIDED HEREIN. VISUAL CONTACT WITH THE CONTRACTOR SHALL BE REQUIRED TO VERIFY THE ACCURACY OF THE INFORMATION PROVIDED HEREIN.

ULTA BEAUTY
ULTA #1813
SHOPS OF MADISON
8201 HIGHWAY 72 WEST
SUITE C
MADISON, AL 35758

DIMENSION PLAN AND DETAILS

DESIGNED BY	IA
CHECKED BY	PK
JOB NUMBER	19047
SHEET NAME	A2.0

NOT USED

SCALE: NONE

NOTE: REFER TO MANUFACTURERS DETAILS FOR ADDITIONAL INSTALLATION INFORMATION. G.C. TO FIELD VERIFY STRUCTURAL COLUMN SIZES. NOTIFY ARCHITECT IF COLUMN IS TOO LARGE FOR PREMANUFACTURED COLUMN ENCLOSURE.

COLUMN COVER TO EXTEND 6" ABOVE CEILING

SEE SHEET CS-3 FOR COLUMN COVER VENDOR

PROVIDE COLUMN TRIM RING AT ACT CEILING G.C. TO USE MANUFACTURER APPROVED VINYL LATEX TOUCH UP PAINT ON ALL CUT EDGES OF RECTANGULAR PANELS.

ALL SIDES

12" DIAMETER (U.N.O.) PREMANUFACTURED COLUMN COVER FIBER REINFORCED GYPSUM.

LIGHT GAUGE STIFFENER AT 4'-0" O.C. VERTICALLY

FASTENERS AT 6" COUNTERS

TAP FILL AND SAND BY INSULATOR

SHIMS REQUIRED

BLOCKING AS REQUIRED

STRUCTURAL STEEL COLUMN - EXISTING

PROVIDE COLUMN TRIM RING AT CEILING

BEND METAL RECEPTACLE FACE PLATE TO MATCH COLUMN ENCLOSURE RADIUS. COORDINATE LOCATION AND HEIGHT WITH ELECTRICAL DRAWINGS.

SCALE: 1-1/2"=1'-0"

2 SECTION AT COLUMN COVER

SCALE: N.T.S.

1 COLUMN COVER DETAIL

SCALE: 1-1/2"=1'-0"

PLAN KEY NOTES:

- EXISTING DEMISING/BUILDING WALL TO REMAIN
- G.C. TO FIELD VERIFY COLUMN LOCATIONS AND NOTES AND ULTA'S INSTRUCTIONS. PROJECT MANAGER IMMEDIATELY OF ANY DISCREPANCY.
- PROVIDE (7) ROWS OF 2x4 HORIZONTAL FIRE RATED BLOCKING FOR INSTALLATION OF 10'-0" TALL STAIRS. SEE DETAIL 7/A8.3 FOR ADDITIONAL INFORMATION.
- G.C. TO PROVIDE PLYWOOD BLOCKING IN WALL FOR MIRRORS. REFER TO ELEVATIONS FOR MORE INFORMATION.
- SKIM COAT WALL TO LEVEL 5 FINISH FROM FLOOR ON UNDERSIDE OF ARCH.
- CONTINUOUS 4" x 3/4" FIRE-RATED PLYWOOD BACKING PLACED ABOVE GYPSUM BOARD AND SECURE TO GYPSUM BOARD CEILING FRAMING SYSTEM BETWEEN STUDS. TRACK STARTS AT 6" FROM INTERIOR PARTITION OR ARCH FIXTURE U.N.O.
- G.C. TO INSTALL ULTA (FIXTURE CONTRACTOR) SUPPLIED WALL CLEAT. G.C. TO FURNISH AND INSTALL WALL BLOCKING. SECURE CLEAT TO BLOCKING. FOR BLOCKING AND LOOSE CLEAT HEIGHTS, REFER TO F1.1A & F1.1B SHEETS.
- WINDOW SHADES ARE TO BE INSTALLED ON ALL WINDOWS. SHADES WILL NOT BE LOCATED ON TRANSOM AND VESTIBULE WINDOWS. SEE A4.1 FOR SHADE SPECIFICATION.
- SEE DETAIL 8/A8.3 FOR WALL BASE INSTALLATION AT PERIMETER FIXTURES.
- G.C. TO PROVIDE (2) 2 x 12 FIRE TREATED WOOD BLOCKING IN WALL FOR LENGTH OF VALANCE. ATTACH PLATE WITH 3 1/2" LONG LAG BOLTS. SEE DETAIL 1/A3.2 FOR ADDITIONAL INFORMATION.
- REFER TO SHEET P-5 FOR WATER HEATER PROTECTION REQUIREMENTS.
- REFER TO ELECTRICAL DRAWINGS AND INTERIOR ELEVATIONS FOR TEMPERATURE SENSOR AND LIGHT SWITCH LOCATIONS AT OFFICE AND COORDINATE METAL STUD FRAMING.
- 3/4" FIRE RATED PLYWOOD FLOOR SLAB TO 6" ABOVE CEILING ON ALL THREE SIDES OF ETAGERE STORAGE PAINTED P-1.
- BACK OF SIDEWALL TO BE ANCHORED TO WALL. G.C. TO INSTALL 2x8 WOOD BLOCKING IN WALL. TOP OF WOOD BLOCKING TO BE MOUNTED AT 31" A.F.F. SEE DETAIL 6/A2.3 FOR BLOCKING.
- G.C. TO FLAT TAPE ALL WALLS POST INSTALLATION OF FLOORING. G.C. TO FLAT TAPE ALL WALLS TO FLOOR FOR WALLS THAT REQUIRE COVE BASE.
- G.C. TO FURNISH AND INSTALL IN-WALL BLOCKING. FOR BLOCKING HEIGHT, REFER TO SHEET F1.1B.

SCALE: NONE

A DIMENSION PLAN

BLOCKING NOTES:

GENERAL:

- ALL IN-WALL BLOCKING IS TO BE 2x8.
- ALL WOOD BLOCKING IN WALLS BETWEEN STUDS OR PARTITIONS IS TO BE 2x8.
- ALL WOOD BLOCKING TO BE MIN. 1/2" THICK FIRE RATED (AS REQUIRED BY CODE) AND BLOCKING TO BE FIRE RATED (AS REQUIRED BY CODE).
- SEE 8/A2.3 TYPICAL BLOCKING DETAIL.

SALES:

WATER HEATER WALL CASE FIXTURES:

FIXTURE CLEATS FURNISHED BY ULTA AND INSTALLED BY G.C. BLOCKING PROVIDED BY G.C. SEE MILLWORK FIXTURE OUT SHEETS AND BLOCKING AT WALL FIXTURE DETAIL THIS SHEET ON P1.1A & P1.1B SHEETS.

FOR RETROFIT INSTALLATION AT EXISTING GYPSUM BOARD: REMOVE GYPSUM BOARD AS REQUIRED TO INSTALL CONTINUOUS 2x8 AND REPAIR WITH NEW GYPSUM BOARD TO MATCH EXISTING GYPSUM BOARD TYPE AND THICKNESS. 2x8 CONTINUOUS WOOD BLOCKING WITH SPACED KIM-BACK CLIPS. SECURE BLOCKING TO EXISTING STUDS WITH SCAPCO KWIM-BACK CLIPS USING #10 SCREWS.

OFFICE:

COUNTER TOP - 18" HIGH BLOCKING AT 37" A.F.F. CENTERED

SHELVING - 36" HIGH BLOCKING AT 87" A.F.F. CENTERED

STAGING AREA:

CONTINUOUS SURFACE MOUNTED HORIZONTAL FIRE RETARDANT (AS REQUIRED BY CODE) 2x4 BLOCKING AT EACH SIDE OF IN-WALL STAIRS. SEE INTERIOR ELEVATIONS FOR MORE INFORMATION.

G.C. TO PROVIDE SUFFICIENT WALL BLOCKING FOR WALL MOUNTED STORAGE. SEE INTERIOR ELEVATIONS FOR LOCATIONS AND SPECIFICATIONS.

RESTROOMS:

G.C. TO PROVIDE SUFFICIENT WALL BLOCKING FOR WALL MOUNTED TOILETS - GRAB BARS AND ACCESSORIES. SEE PLUMBING SHEET S1 FOR TOILET SPECIFICATIONS.

PLAN KEY NOTE

WALL TYPE - SEE A2.3 SHEET FOR FURTHER INFORMATION

NOTE: DIMENSIONS ARE TO FACE OF STUD OR FACE OF EXISTING WALL, U.N.O.

NEW INTERIOR PARTITION

EXISTING PARTITION

NEW INSULATED PARTITION, SEE WALL TYPES FOR FURTHER INFORMATION

SCALE: NONE

A DIMENSION PLAN