


30 x 42


01 EXTERIOR WALLS

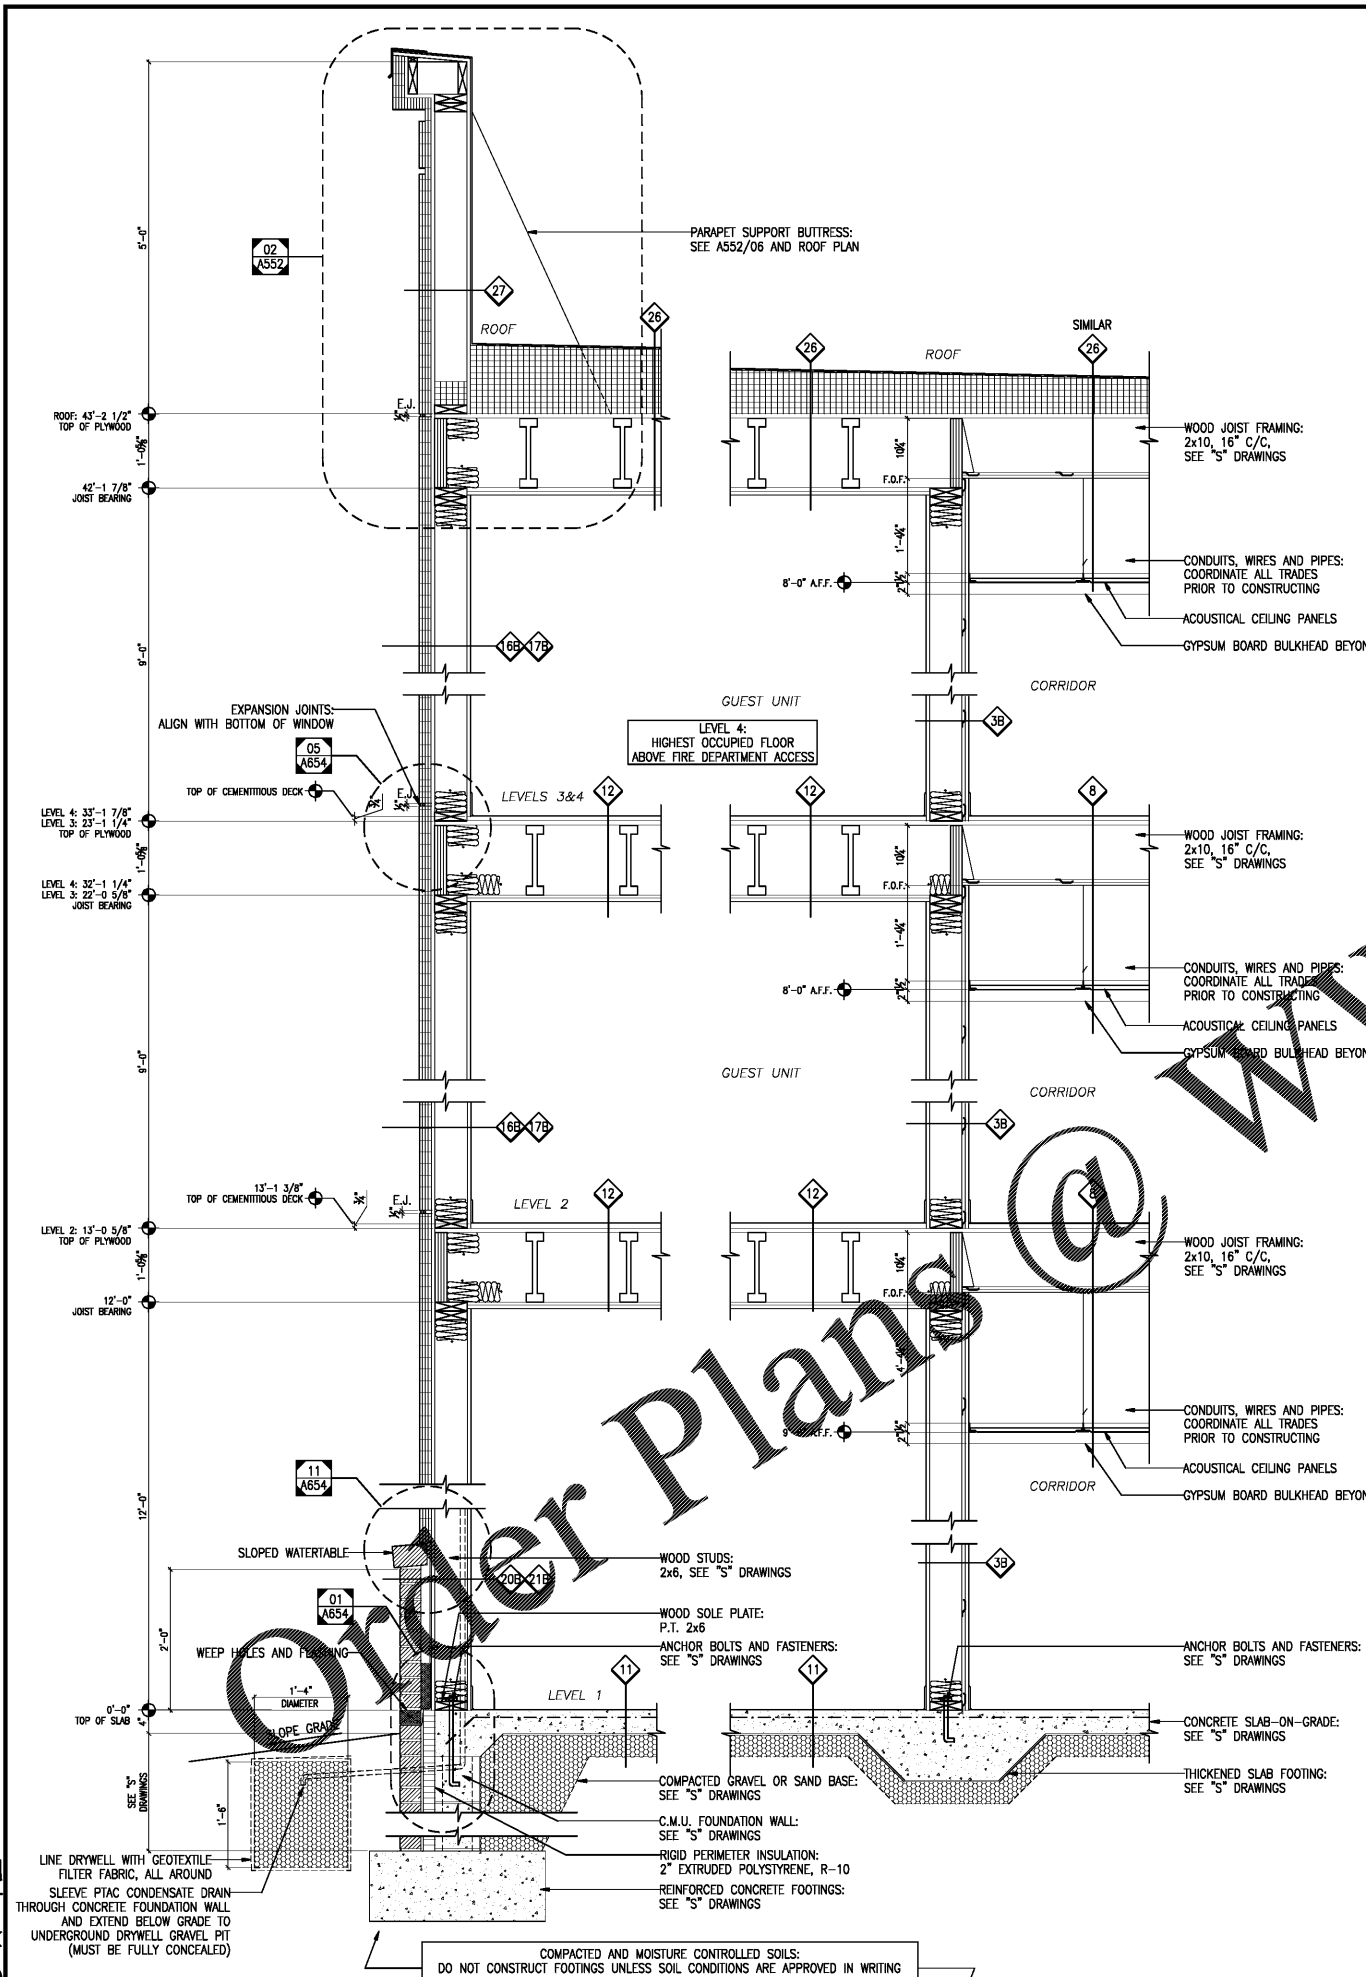

DO NOT CONSTRUCT FOOTINGS UNLESS SOIL CONDITIONS ARE APPROVED IN WRITING BY GEOTECHNICAL ENGINEER AND ALL CONDITIONS MEET PLANS AND SPECIFICATIONS

02 CORRIDOR WALLS

03 GUEST UNIT WALLS

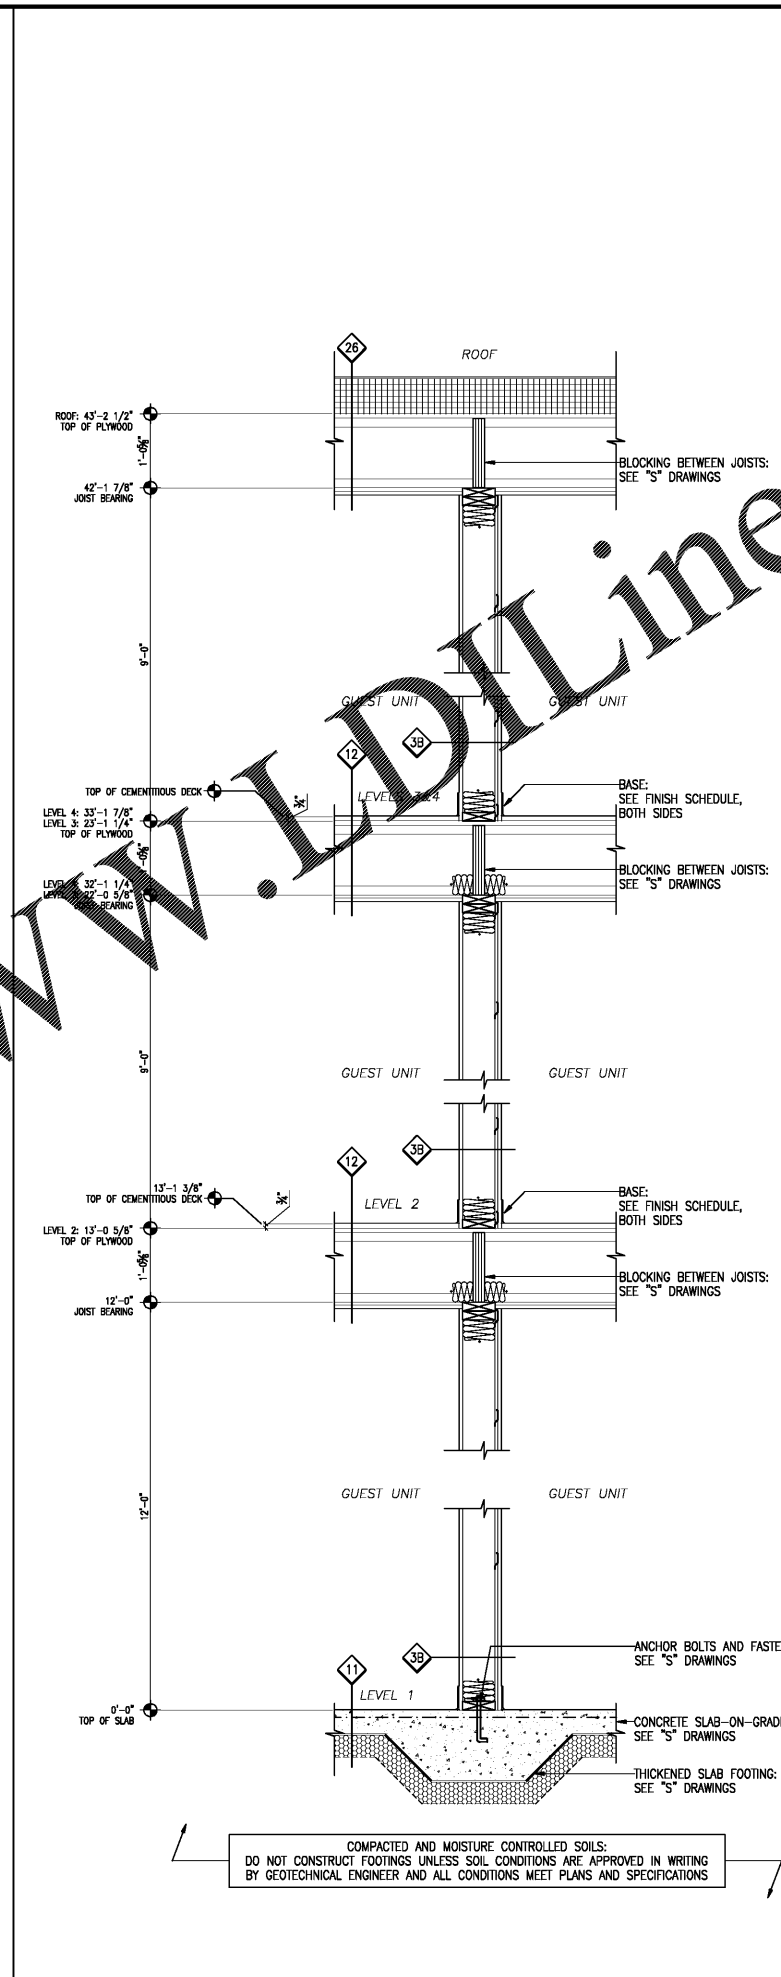

DO NOT CONSTRUCT FOOTINGS UNLESS SOIL CONDITIONS ARE APPROVED IN WRITING BY GEOTECHNICAL ENGINEER AND ALL CONDITIONS MEET PLANS AND SPECIFICATIONS

2012 IBC CODE NOTE
FLOOR/CEILING DRAFTSTOPPING NOT REQUIRED PER 718.3.2 EXCEPTION 1

SHEET NOTES

1. TREAT SOIL TO POISON TERMITES, INCLUDING CAVITIES OF BUILDING.
2. "S" DRAWINGS SUPERSEDE STRUCTURAL COMPONENTS SHOWN HERE UNLESS FIRE-RATED ASSEMBLY HAS MORE STRINGENT REQUIREMENTS THAN STRUCTURAL.
3. AT EXTERIOR WALLS, INSTALL BARRIER WRAP, FLASHINGS AND WEEPS TO CONTINUALLY SHED WATER DOWN, OVER AND OUT OF WALL CAVITIES. MINIMIZE VERTICAL SEAMS AND OVERLAP BARRIER WRAP 32" MINIMUM WHERE VERTICAL SEAMS MUST OCCUR.
4. INSULATION SHALL BE INSTALLED WITH SNUG FIT TO COMPLETELY FILL CAVITIES AND SHALL MAINTAIN CONTINUITY TO GREATEST EXTENT. BATT INSULATION SHALL ACHIEVE FULL LOFT AND NOT BE COMPRESSED INTO PLACE, BUT PRECISELY CUT TO FIT. THE ENTIRE BUILDING ENVELOPE SHALL BE INSULATED.

HAMPTON INN
NEW HOTEL
ASHLAND CITY, TENNESSEE
WWW.DAVIDRCARTER.NET
DAVID R. CARTER AND ASSOCIATES



ISSUE DATE: 05-30-19
REVISION LOG

1" = 1'-0"

0 6" 1'

PROJECT 00755

WALL SECTIONS A551