


Order Plans @ WWW.WALDLINE.COM

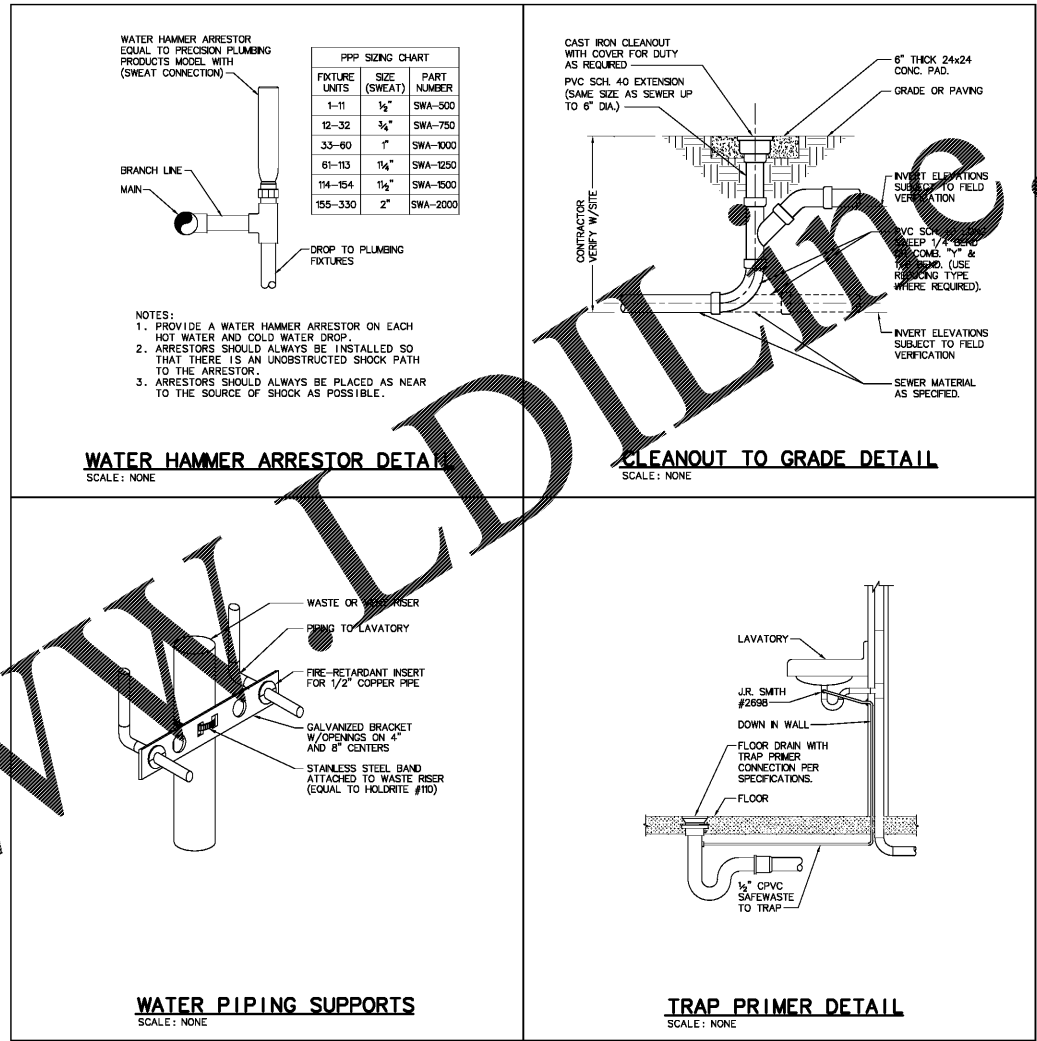

PPP SIZING CHART

FIXTURE UNITS	SIZE (SWEAT)	PART NUMBER
1-11	1/2"	SWA-500
12-32	3/4"	SWA-750
33-60	1"	SWA-1000
61-113	1 1/4"	SWA-1250
114-154	1 1/2"	SWA-1500
155-330	2"	SWA-2000

- NOTES:
1. PROVIDE A WATER HAMMER ARRESTOR ON EACH HOT WATER AND COLD WATER DROP.
 2. ARRESTORS SHOULD ALWAYS BE INSTALLED SO THAT THERE IS AN UNOBSTRUCTED SHOCK PATH TO THE ARRESTOR.
 3. ARRESTORS SHOULD ALWAYS BE PLACED AS NEAR TO THE SOURCE OF SHOCK AS POSSIBLE.

CAST IRON CLEANOUT WITH COVER FOR DUTY AS REQUIRED

PVC SCH. 40 EXTENSION (SAME SIZE AS SEWER UP TO 6" DIA.)

6" THICK 24x24 CONC. PAD

GRADE OR PAVING

INVERT ELEVATIONS SUBJECT TO FIELD VERIFICATION

CONTRACTOR VERIFY W/SITE

PVC SCH. 40 (USE REDUCING TYPE WHERE REQUIRED)

INVERT ELEVATIONS SUBJECT TO FIELD VERIFICATION

SEWER MATERIAL AS SPECIFIED.

WASTE OR SINK RISER

PIND TO LAVATORY

FIRE-RETARDANT INSERT FOR 1/2" COPPER PIPE

GALVANIZED BRACKET W/OPENINGS ON 4" AND 8" CENTERS

STAINLESS STEEL BAND ATTACHED TO WASTE RISER (EQUAL TO HOLDRITE #110)

LAVATORY

J.R. SMITH #2698

DOWN IN WALL

FLOOR DRAIN WITH TRAP PRIMER CONNECTION PER SPECIFICATIONS.

FLOOR

1/2" CPVC SAFEWASTE TO TRAP

1925 Prospect Ave.
Orlando, FL 32814
P (407) 661-9100
F (407) 661-9101
www.cpe.com

White Development Company
 1801 South Keane Rd.
 Clearwater, FL 33766

Retail @ Tattersall Park
 US Highway 280 & Highway 119
 Hoover, AL

Plumbing Details

PROJECT NO. 510000
 DATE 07/27/18
 DRAWN BY [Signature]
 CHECKED JS

Revision Schedule

No.	Description	Date
A	100% Public Submission	06/27/18
B	ISSUED TO SIG & PERMIT	7/26/18

PROJECT TITLE
SHEET TITLE

CLIENT NAME
PROJECT NAME
SHEET TITLE

© 2018 ALL RIGHTS RESERVED