


Revisions		
#	Date	Description

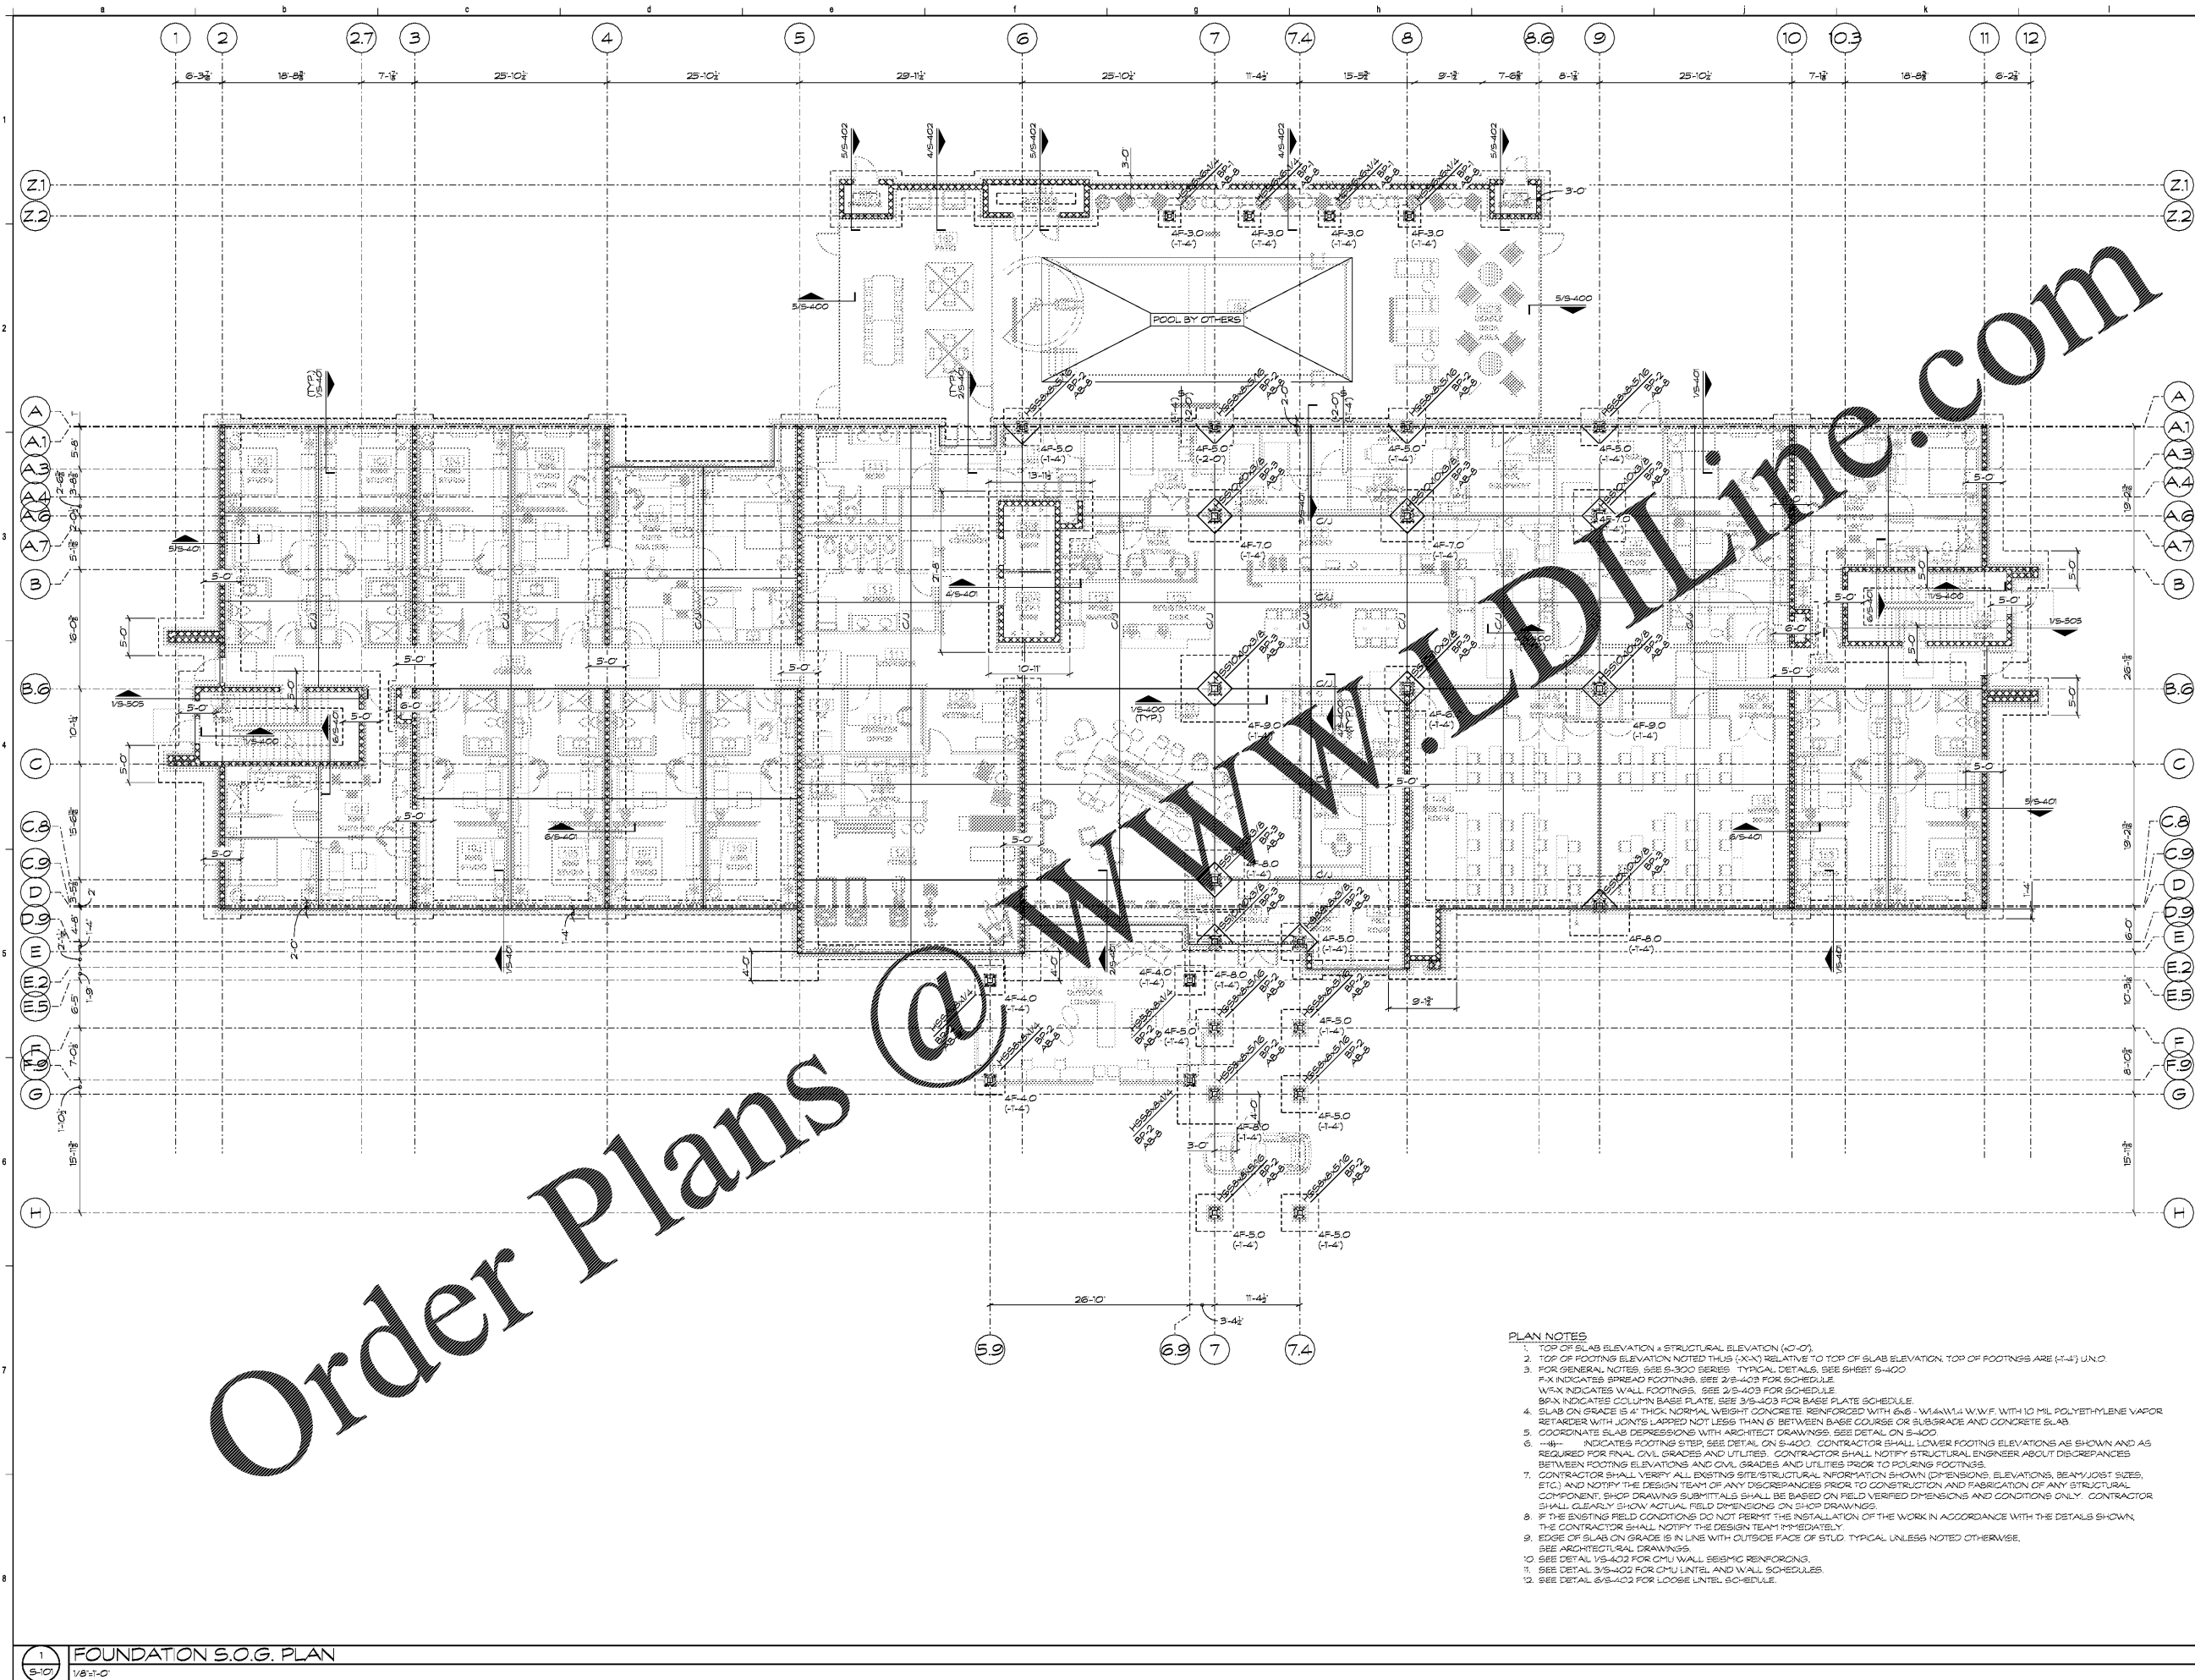

Order Plans @

- PLAN NOTES**
1. TOP OF SLAB ELEVATION = STRUCTURAL ELEVATION (4'-0").
 2. TOP OF FOOTING ELEVATION NOTED THIS (X-X) RELATIVE TO TOP OF SLAB ELEVATION. TOP OF FOOTINGS ARE (-1'-4") U.N.O.
 3. FOR GENERAL NOTES, SEE S-300 SERIES. TYPICAL DETAILS, SEE SHEET S-400.
 4. F-X INDICATES BREAD FOOTINGS. SEE 2/3-403 FOR SCHEDULE.
 5. W-X INDICATES WALL FOOTINGS. SEE 2/3-403 FOR SCHEDULE.
 6. B-X INDICATES COLUMN BASE PLATE. SEE S/3-403 FOR SCHEDULE.
 7. SLAB ON GRADE IS 4" THICK NORMAL WEIGHT CONCRETE REINFORCED WITH #6 - W14M1.4 W.W.F. WITH 10 MIL POLYETHYLENE VAPOR RETARDER WITH JOINTS LAPPED NOT LESS THAN 6" BETWEEN BASE COURSE OR SUBGRADE AND CONCRETE SLAB.
 8. COORDINATE SLAB DEPRESSIONS WITH ARCHITECT DRAWINGS. SEE DETAIL ON S-400.
 9. -#-#- INDICATES FOOTING SIZES. SEE DETAIL ON S-400. CONTRACTOR SHALL LOWER FOOTING ELEVATIONS AS SHOWN AND AS REQUIRED FOR FINAL CIVIL GRADES AND UTILITIES. CONTRACTOR SHALL NOTIFY STRUCTURAL ENGINEER ABOUT DISCREPANCIES BETWEEN FOOTING ELEVATIONS AND CIVIL GRADES AND UTILITIES PRIOR TO POURING FOOTINGS.
 10. CONTRACTOR SHALL VERIFY ALL EXISTING SITE/STRUCTURAL INFORMATION SHOWN (DIMENSIONS, ELEVATIONS, BEAM/JOIST SIZES, ETC.) AND NOTIFY THE DESIGN TEAM OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION AND FABRICATION OF ANY STRUCTURAL COMPONENT. SHOP DRAWINGS SUBMITTALS SHALL BE BASED ON FIELD VERIFIED DIMENSIONS AND CONDITIONS ONLY. CONTRACTOR SHALL CLEARLY SHOW ACTUAL FIELD DIMENSIONS ON SHOP DRAWINGS.
 11. IF THE EXISTING FIELD CONDITIONS DO NOT PERMIT THE INSTALLATION OF THE WORK IN ACCORDANCE WITH THE DETAILS SHOWN, THE CONTRACTOR SHALL NOTIFY THE DESIGN TEAM IMMEDIATELY.
 12. EDGE OF SLAB ON GRADE IS IN LINE WITH OUTSIDE FACE OF STUD. TYPICAL UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS.
 13. SEE DETAIL VS-402 FOR CMU WALL SEISMIC REINFORCING.
 14. SEE DETAIL S/3-403 FOR CMU LINTEL AND WALL SCHEDULES.
 15. SEE DETAIL S/3-402 FOR LOOSE LINTEL SCHEDULE.

1 FOUNDATION S.O.G. PLAN
 1/8" = 1'-0"