


1 LIFE SAFETY PLAN - FOURTH FLOOR
BUILDING TWO AND FOUR

SCALE: 1/16" = 1'-0"

Order Plans @ www.dilme.com

LIFE SAFETY LEGEND	
	INDICATES 3 HOUR RATED WALL
	INDICATES 2 HOUR RATED WALL
	INDICATES 1 HOUR RATED WALL
	INDICATES PATH OF TRAVEL (250 FEET MAXIMUM - PER IBC 101.6.2) INDICATES COMMON PATH OF TRAVEL (125 FEET MAXIMUM - PER IBC 101.4.3)
	INDICATES EXIT SIGN
	INDICATES REQUIRED PANIC HARDWARE AT DOORS (PER IBC 1008.1.10)
	INDICATES HORIZONTAL EXIT
	INDICATES FIRE EXTINGUISHER - "TYPE A" IN SEMI-RECESSED FIRE RATED CABINET. DISTANCE BETWEEN CABINETS 7'-0" MAX. MOUNT TOP OF CABINET NOT MORE THAN 5'-0" A.F.F.; BOTTOM NOT LESS THAN 4" A.F.F. NOTE: FIRE EXTINGUISHERS WILL ALSO BE PLACED IN EACH UNIT.
POSTING OF OCCUPANT LOAD	
PER IBC 1004.3	
EVERY ROOM OR SPACE THAT IS AN ASSEMBLY OCCUPANCY SHALL HAVE THE OCCUPANT LOAD OF THE ROOM OR SPACE POSTED IN A CONSPICUOUS PLACE, NEAR THE MAIN EXIT OR EXIT ACCESS DOORWAY FROM THE ROOM OR SPACE. POSTED SIGNS SHALL BE OF AN APPROVED LEGIBLE PERMANENT DESIGN AND SHALL BE MAINTAINED BY THE OWNER OR AUTHORIZED AGENT. POSTED OCCUPANCY NUMBER SHALL NOT EXCEED ONE OCCUPANT PER SEVEN SQUARE FEET (IBC 1004.2) OR BE GREATER THAN THE NUMBER OF OCCUPANTS THAT CAN BE ACCOMMODATED BY THE SPACE'S NARROWEST EGRESS COMPONENT (IBC 1005)	

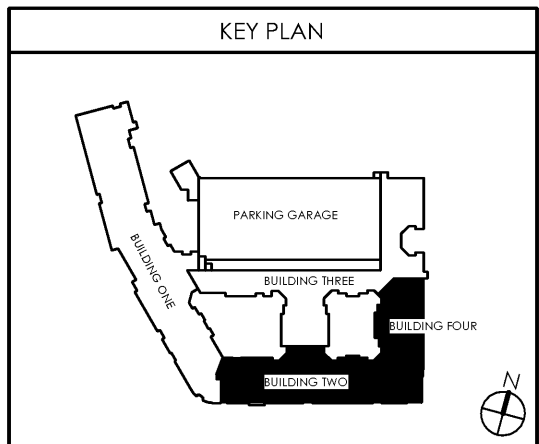

EXIT CAPACITY 170 OCCUPANTS
34' CLEAR (0.2 / OCC.) - IBC 1005.1
ACTUAL OCCUPANT LOAD: 88

Lyric at Norton Commons
Prospect, Kentucky

charlan • brock
associates
architects • planners

LIFE SAFETY PLAN
(04) - BUILDING
TWO AND FOUR -
FOURTH FLOOR
PLAN

date: 06/04/2019
job no.: 3789.15
drawn by: EGR JAC, TQT
reviewed by: CBA
issue history:
Δ Date

A0.42

