I:\2014\2014169\0 Civil\Landscape\2014169lo-2.dwg, ARCH FULL BLEED D (36.00 X 24.00 INCHES), SCHEME PMI.STB, DWG TO PDF.PC3, MICHAEL LETSON, 01.11.2018 2:38:20 PM

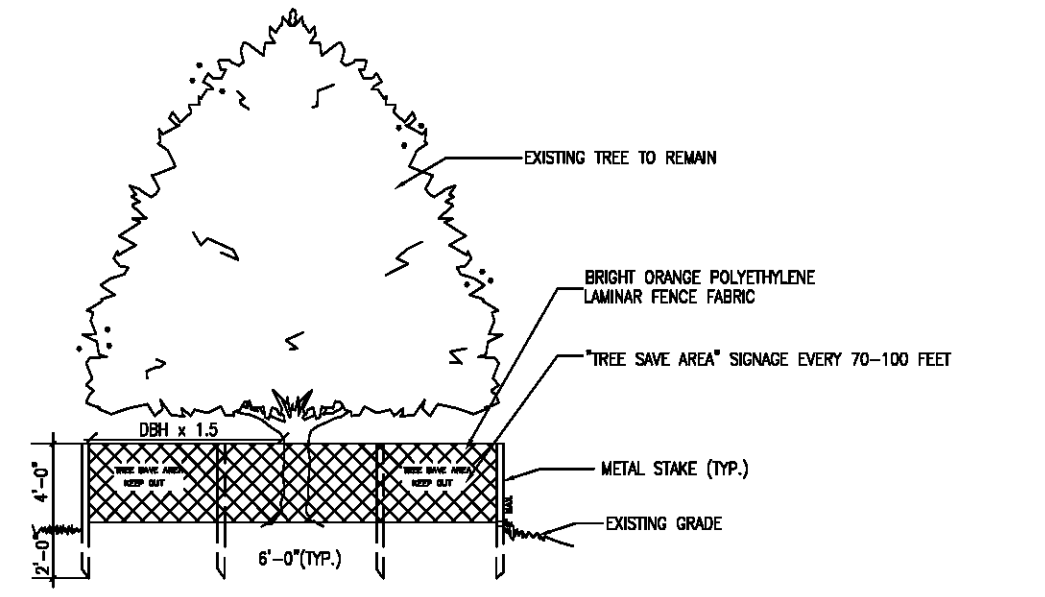

NOTE:
ALL TREE PROTECTION DEVICES ARE TO BE INSTALLED PRIOR TO ANY CONSTRUCTION ACTIVITIES BEGIN AND MAINTAINED UNTIL FINAL LANDSCAPE IS INSTALLED. NO PARKING, STORAGE OR OTHER CONSTRUCTION SITE ACTIVITIES ARE TO OCCUR WITHIN THE TREE PROTECTION AREA. ALL TREE PROTECTION FENCING TO BE INSPECTED DAILY AND REPLACE OR REPAIRED AS NEEDED. ALL TREE PROTECTION FENCE MUST BE ACCOMPANIED BY "KEEP OUT" OR "TREE SAVE" SIGNAGE. FENCE LOCATIONS ON PLANS ARE APPROXIMATE AND SHOULD BE INSTALLED TO PROTECT THE CRITICAL ROOT ZONE. FENCING IS TO BE INSTALLED OUTSIDE OF TREE DRIPLINE.

TREE PROTECTION DETAIL
NOT TO SCALE

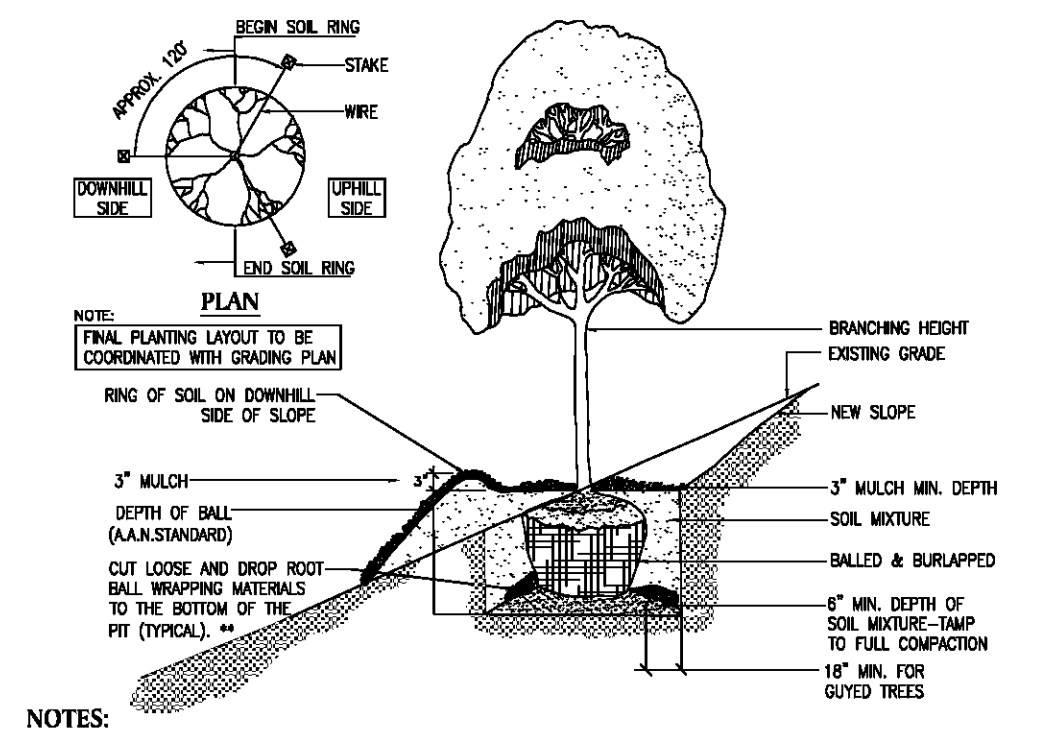

NOTES:
1. ALL DECIDUOUS TREES OVER 4FT. IN HEIGHT AND ALL EVERGREEN TREES OVER 3FT. IN HEIGHT SHALL BE STAKED OR GUYED AS SHOWN.
2. MULTIPLE STEMMED DECIDUOUS TREES OVER 4FT. IN HEIGHT SHALL BE STAKED WITH 2 STAKES IN SUCH MANNER AS TO STABILIZE 2 MAINSTEMS.
3. THE WOOD STAKES SHALL BE CONSTRUCTION GRADE, ROUGH OR DRESSED, OF SOUND WOOD, DECAY RESISTANT, AND OF THE SIZE INDICATED IN THE DETAILS.
4. THE WIRE TIES SHALL BE 12 OR 14 GAUGE GALVANIZED WIRE, AND BE PROVIDED WITH A ONE FOOT PIECE OF RUBBER HOSE PLACED TO PREVENT INJURY TO THE BARK.
5. TREE WRAPPING SHALL BE PLACED AROUND ALL TRUNKS OF DECIDUOUS TREES TWO OR MORE INCHES IN CALIPER. TREE WRAPPING SHALL EXTEND FROM GROUND LINE 2" ABOVE THE FIRST BRANCH. EACH TURN OF WRAPPING MATERIAL SHALL OVERLAP 1/2 THE WIDTH OF THE PREVIOUS TURN. BIND WITH JUTE TWINE AT TOP, MIDDLE, AND BOTTOM. TREE WRAPPING AND TWINE SHALL CONFORM TO .

* PIT DRAINAGE MODIFICATION FOR SLOPE PLANTING (WHEN REQUIRED).
A. PRIOR TO PLANTING ON A SLOPE THE CONTRACTOR SHALL TEST NO MORE THAN 3 PITS FOR PERCOLATION.
B. PERCOLATION TEST SHALL CONSIST OF FILLING THE PIT WITH APPROXIMATELY 6" OF WATER. THE ENGINEER SHALL DETERMINE THE RATE OF PERCOLATION AND DETERMINE IF PIT DRAINAGE IS REQUIRED.

TREE PLANTING ON SLOPE
NOT TO SCALE

NOTE:
1. ATTACH GUYS TO THE CENTRAL LARGEST TRUNK.
2. SPACE STAKES EVENLY AROUND ROOTBALL PIT SUCH THAT WIRES DO NOT COME IN CONTACT WITH ANY TRUNK OR BRANCH.

PLANTING PROCEDURE:
1. EXCAVATE ROOTBALL PIT.
2. ADD EXCAVATED SOIL & TAMP. SET TREE SUCH THAT TOP OF ROOTBALL IS 2–3" HIGHER THAN FINISHED GRADE.
3. BACKFILL W/SOIL MIX & "WATER IN"

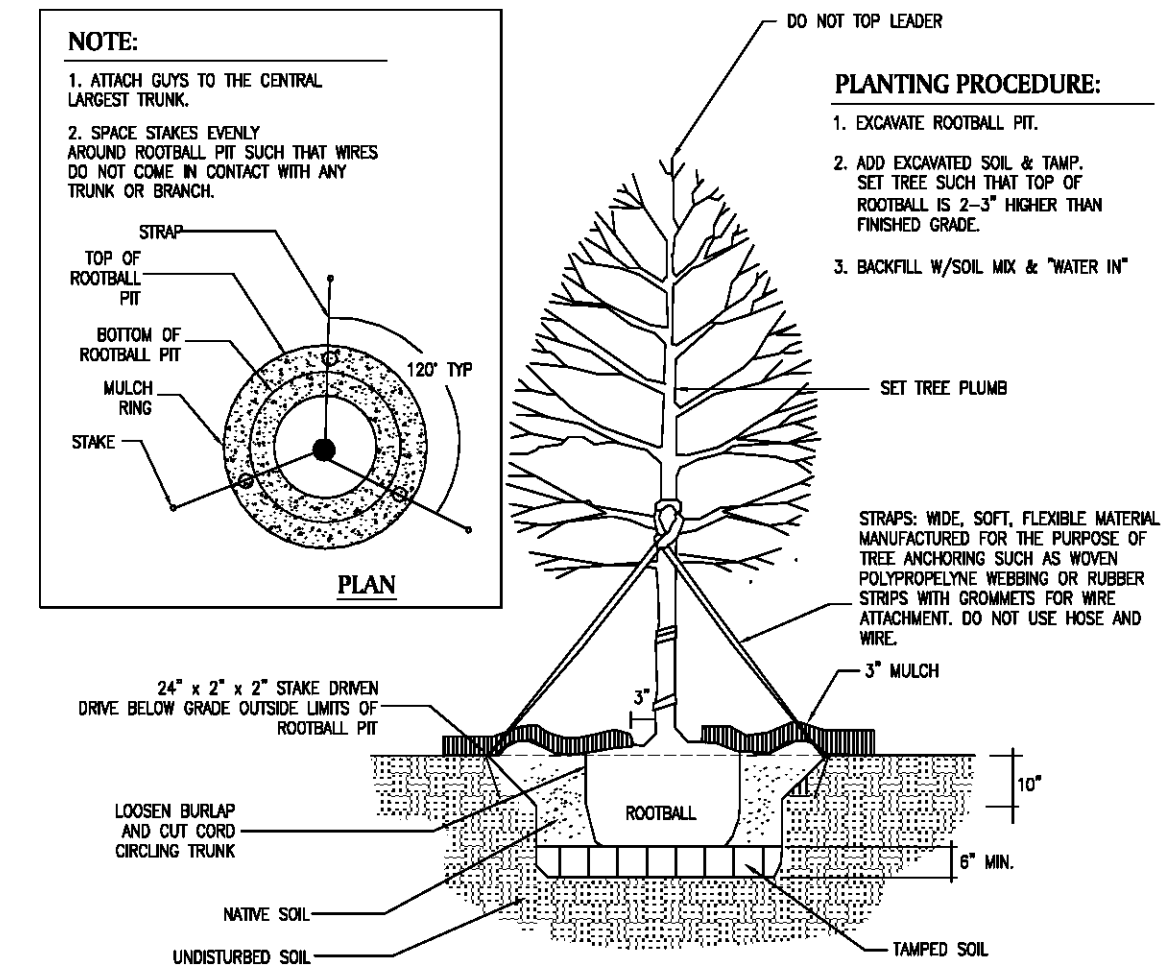

TYPICAL TREE PLANTING DETAIL
NOT TO SCALE

NOTE:
1. ATTACH GUYS TO THE CENTRAL LARGEST TRUNK.
2. SPACE STAKES EVENLY AROUND ROOTBALL PIT SUCH THAT WIRES DO NOT COME IN CONTACT WITH ANY TRUNK OR BRANCH.

PLANTING PROCEDURE:
1. EXCAVATE ROOTBALL PIT.
2. ADD EXCAVATED SOIL & TAMP. SET TREE SUCH THAT TOP OF ROOTBALL IS 2–3" HIGHER THAN FINISHED GRADE.
3. BACKFILL W/SOIL MIX & "WATER IN"

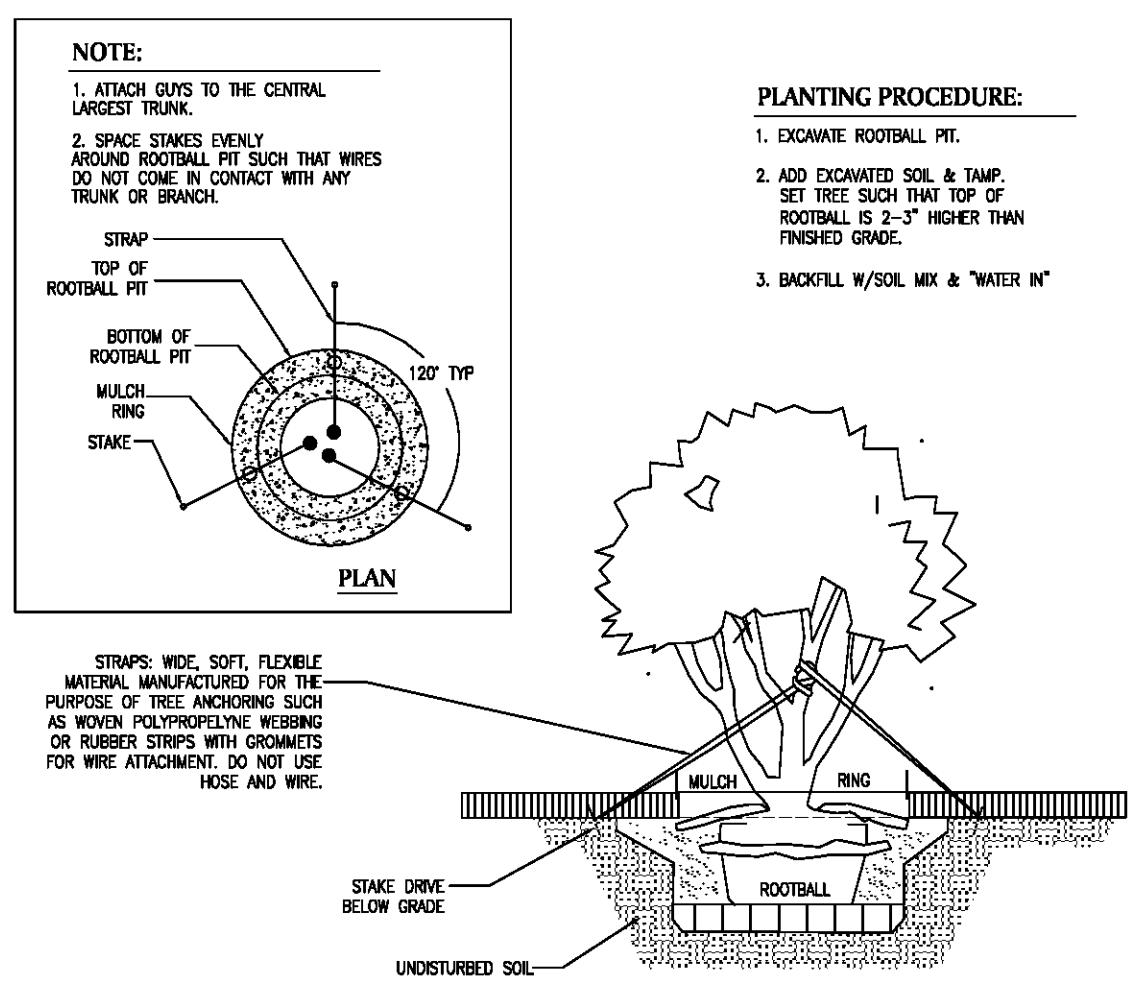

MULTI-TRUNK TREE STAKING AND GUYING
NOT TO SCALE



PLANT BED EDGING DETAIL
NOT TO SCALE

NOTES:
1. LAYOUT PERIMETER PLANTING SPACES AS PER PLAN.
2. FILL IN PLANTING BED WITH TRIANGULAR SPACING.
3 ADJUST AS PER L.A.'S INSTRUCTIONS.

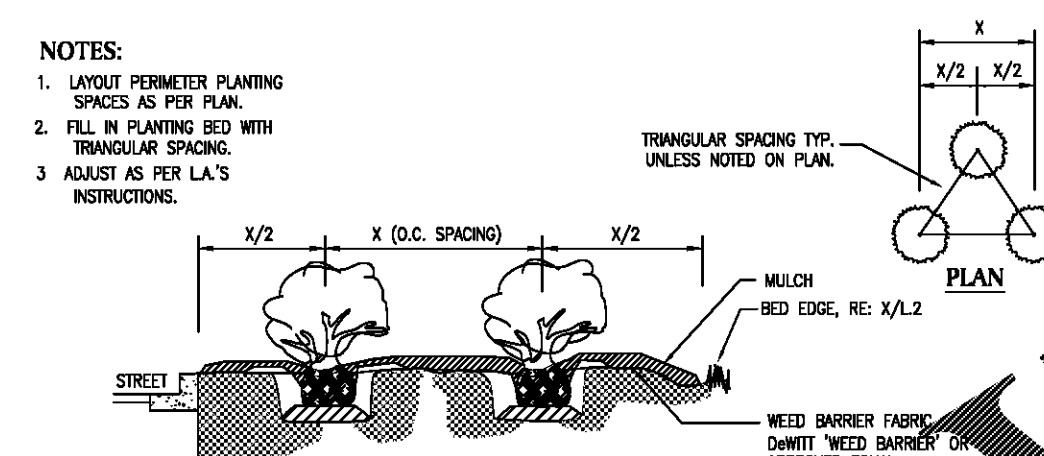

SHRUB/GROUNDCOVER BED DETAIL
NOT TO SCALE

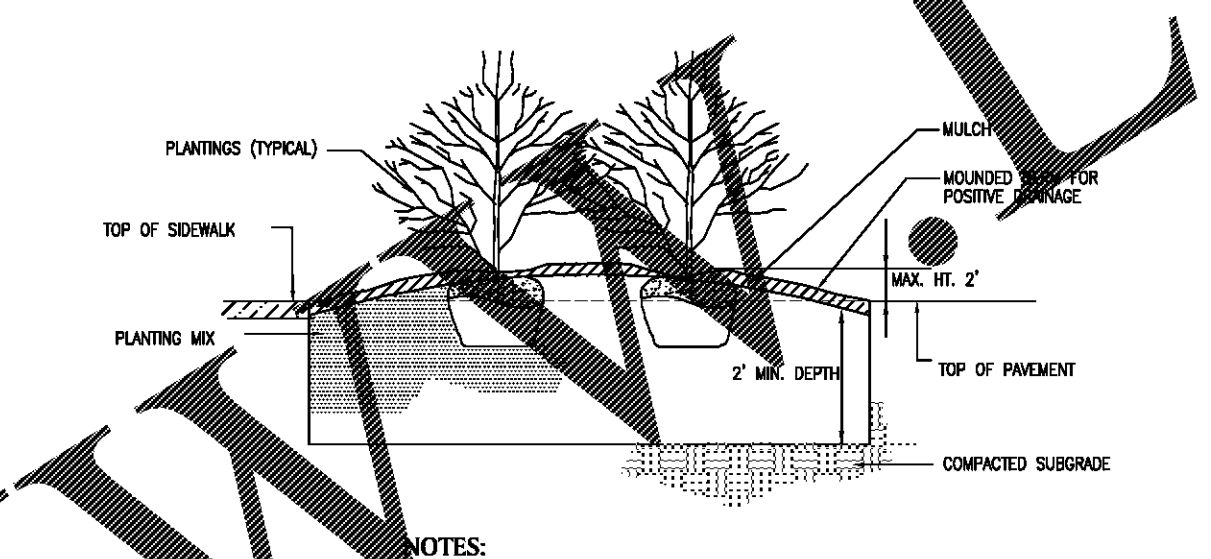

NOTES:
SEE TYPICAL PLANTING DETAILS FOR OTHER PLANTING SPECIFICATIONS

ISLAND PLANTING DETAIL
NOT TO SCALE

PLANTING PROCEDURE:
1. EXCAVATE ROOTBALL PIT.
2. ADD EXCAVATED SOIL & TAMP. SET TREE SUCH THAT TOP OF ROOTBALL IS 2–3" HIGHER THAN FINISHED GRADE.
3. BACKFILL W/SOIL MIX & "WATER IN"

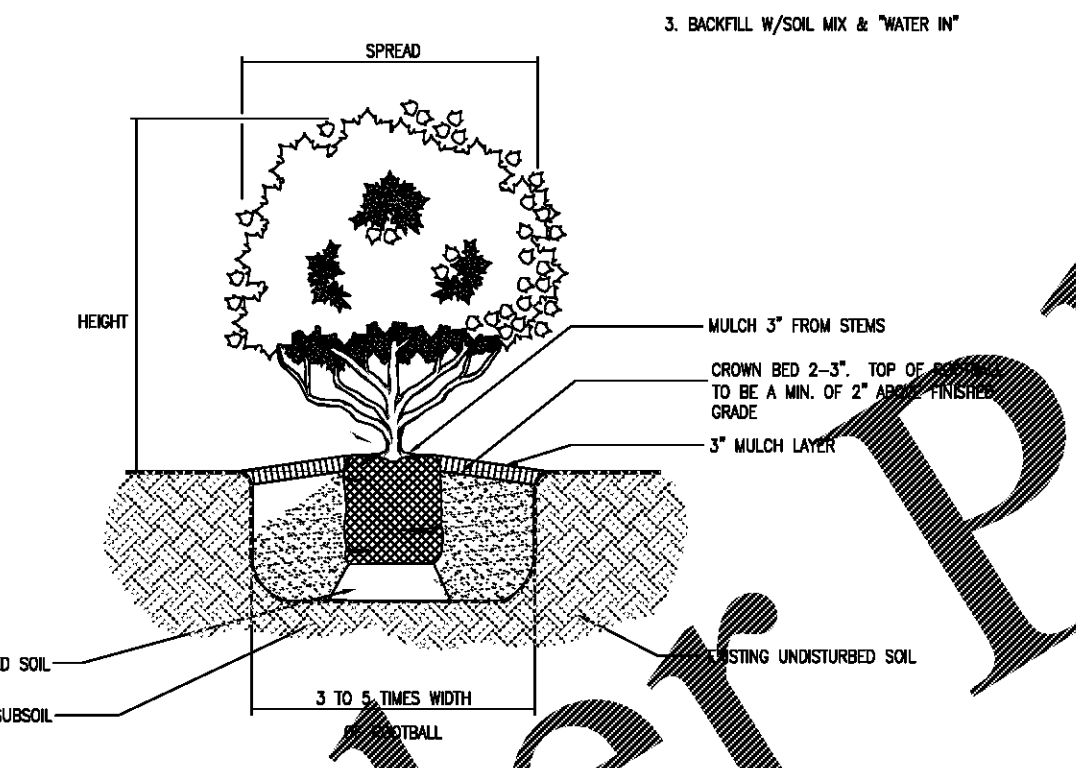

SHRUB & GROUNDCOVER PLANTING DETAIL
NOT TO SCALE

PLANTING PROCEDURE:
1. EXCAVATE ROOTBALL PIT.
2. ADD EXCAVATED SOIL & TAMP. SET TREE SUCH THAT TOP OF ROOTBALL IS 2–3" HIGHER THAN FINISHED GRADE.
3. BACKFILL W/SOIL MIX & "WATER IN"

NOTE:
1. ATTACH GUYS TO THE CENTRAL LARGEST TRUNK.
2. SPACE STAKES EVENLY AROUND ROOTBALL PIT SUCH THAT WIRES DO NOT COME IN CONTACT WITH ANY TRUNK OR BRANCH.

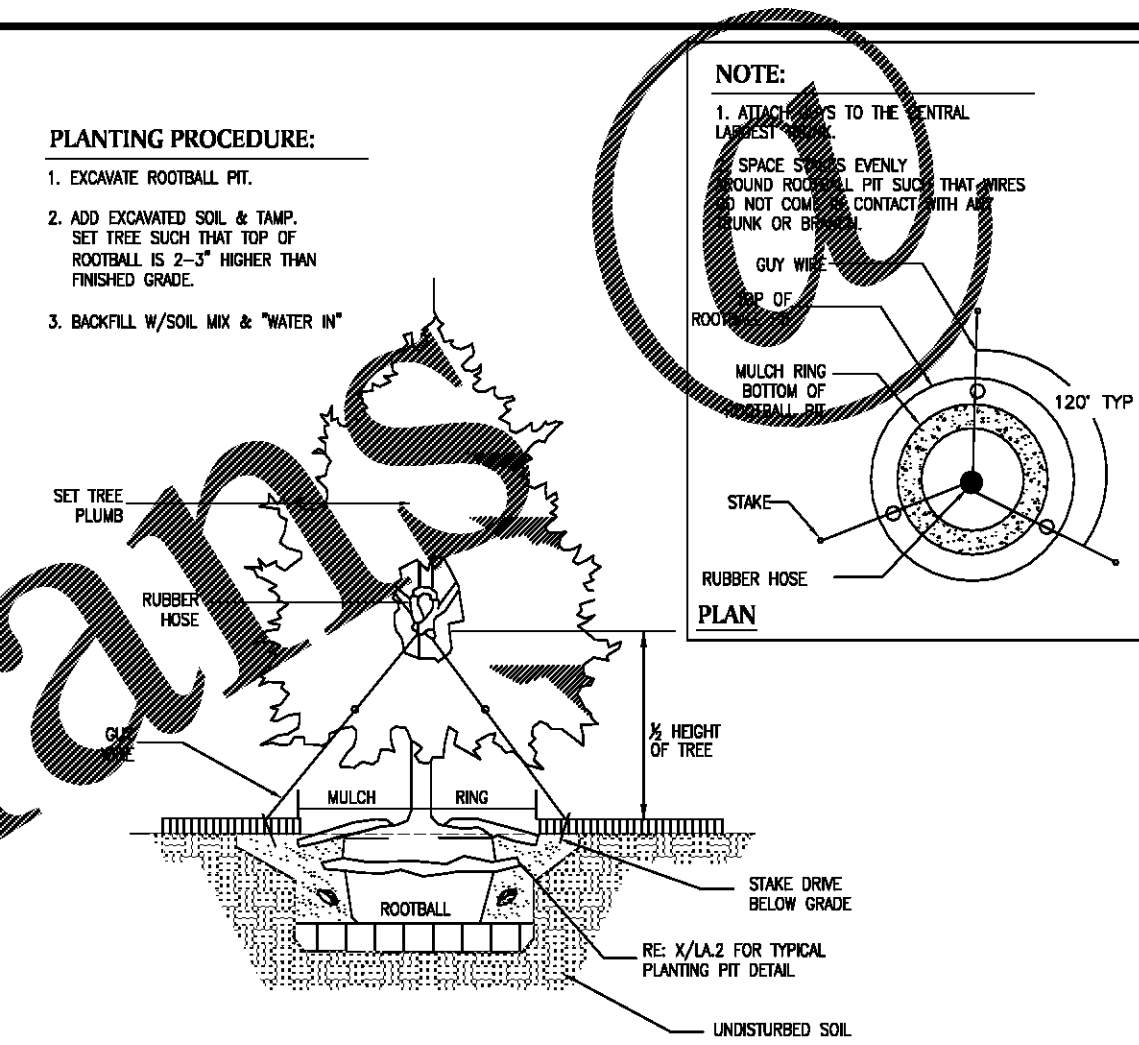

EVERGREEN TREE STAKING AND GUYING
NOT TO SCALE

GENERAL LANDSCAPE NOTES

- LANDSCAPE WORK WILL INCLUDE, BUT IS NOT LIMITED TO, THE SUPPLYING OF ALL PLANT MATERIALS SPECIFIED, THE FURNISHING OF ALL LABOR, EQUIPMENT WATER, ELECTRICITY, EQUIPMENT AND ALL MATERIALS CALLED, INCLUDING ALL RELATED PREPARATION WORK REGARDING SITE INCONSISTENCIES AND SOIL ISSUES. THE WORK WILL INCLUDE MAINTAINING OF ALL PLANTS AND PLANTING AREAS UNTIL FINAL ACCEPTANCE BY THE OWNER. THE LANDSCAPE CONTRACTOR(LC) WILL ASSIGN A QUALIFIED PROJECT MANAGER AND FIELD SUPERVISOR TO WORK DIRECTLY WITH THE LA AND SUPERVISE THE WORK AT ALL TIMES THROUGH FINAL OWNER ACCEPTANCE.
- ALL LANDSCAPE WORK SHALL COMPLY WITH ALL APPLICABLE CODES AND ORDINANCES. PERMITTING IS THE RESPONSIBILITY OF THE LC.
- VERIFICATION OF EXISTING CONDITIONS IS THE RESPONSIBILITY OF THE LC. THIS INCLUDES BUT IS NOT LIMITED TO: SOIL CONDITIONS, UTILITIES (UNDERGROUND AND ABOVE GROUND), EXISTING STRUCTURES, ETC. PRIOR TO CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES & SHALL AVOID DAMAGE TO ALL UTILITIES DURING THE COURSE OF THE WORK. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY & ALL DAMAGE TO UTILITIES, STRUCTURES, SITE APPURTENANCES, ETC. WHICH OCCURS AS A RESULT OF THE LANDSCAPE CONSTRUCTION, AT NO ADDITIONAL COST TO OWNER.
- THE LC SHOULD BE COMPLETELY FAMILIAR WITH LANDSCAPE PLANS PRIOR TO COMMENCEMENT OF WORK. ANY DISCREPANCIES, POTENTIAL PROBLEMS, ETC. SHOULD BE MADE KNOWN TO THE LA PRIOR TO COMMENCEMENT OF WORK
- ALL REASONABLE SAFEGUARDS ARE TO BE TAKEN IN ORDER TO PROTECT EXISTING STRUCTURES, PAVEMENT, FURNISHINGS, LAWN AND LANDSCAPING. THE LC IS RESPONSIBLE FOR DAMAGE THAT OCCURS AS A RESULT OF NEGLIGENCE.
- EXISTING OR PROPOSED DRAINAGE PATTERNS ARE NOT TO BE DISTURBED BY THE LC IN A WAY THAT IS INCONSISTENT WITH THE LANDSCAPE PLANS.
- THE LC IS RESPONSIBLE FOR COORDINATING WORK TO BE PERFORMED WITH THE WORK OF OTHER SUBCONTRACTORS ON THE SITE, INCLUDING SCHEDULING AND PHYSICAL INTERFERENCE.
- THE LC MUST CONFIRM THE AVAILABILITY OF ALL SPECIFIED PLANT MATERIAL PRIOR TO THE COMMENCEMENT OF WORK. THE LC WILL ARRANGE FOR APPROVAL FOR PLANT MATERIALS BY THE LA VIA FIELD VISITS/TAGGING AND OR SUBMISSION OF PLANT SAMPLES AT THE DISCRETION OF THE LA.
- ALL PLANT MATERIAL MUST MEET OR EXCEED THE AMERICAN STANDARDS FOR NURSERY STOCK AS ESTABLISHED BY THE AMERICAN ASSOCIATION OF NURSERYMAN AND APPROVED BY THE AMERICAN NATIONAL STANDARDS INSTITUTE INC.
- ALL PLANT MATERIAL SIZES SPECIFIED ARE MINIMUM SIZES. ALL CONTAINER AND TREE CALIPER SIZES ARE MINIMUM. CONTAINER OR CALIPER SIZE MAY BE INCREASED IF NECESSARY TO PROVIDE OVERALL PLANT SIZE SPECIFIED.
- ALL PLANT MATERIAL WILL BE SUBJECT TO APPROVAL AT THE JOB SITE BY THE LA OR OWNER PRIOR TO INSTALLATION. WHEN DELIVERED PLANT MATERIAL DOES NOT COMPLY WITH THE REQUIREMENTS, THE LA RESERVES THE RIGHT TO REJECT SUCH PLANTS AND REQUIRE THE LC TO REPLACE REJECTED WORK AND CONTINUE SPECIFIED MAINTENANCE UNTIL RE-INSPECTED AND FOUND TO BE ACCEPTABLE. THE LC WILL REMOVE REJECTED PLANTS AND MATERIALS FROM THE PLANTING SITE WITHIN 72 HOURS AND REPLACE WITH ACCEPTABLE MATERIAL THE COST OF LC.
- NO PLANT SUBSTITUTIONS WILL BE PERMITTED WITHOUT PRIOR WRITTEN APPROVAL FROM THE LA. ANY SUBSTITUTIONS MUST BE SUBMITTED IN WRITING ACCOMPANIED BY PICTURES OR SAMPLES FOR APPROVAL BY THE LA PRIOR TO INSTALLATION.
- ALL SHRUB BEDS WILL BE TILLED TO MINIMUM DEPTH OF 4–6 . PLANTING BEDS TO BE SEPARATED FROM LAWN AREAS WITH A 4 DEEP EXCAVATED TRENCH. THE TRENCH WILL HAVE A VERTICAL FACE AGAINST THE LAWN AREA, AND A GENTLY TAPERED EDGE LEADING INTO THE SHRUB BED.
- THE LC IS RESPONSIBLE FOR ENSURING THAT THE SOIL IN ALL PLANTED AREAS IS OF AN APPROPRIATE TYPE AND CONSISTENCY FOR PLANTING AND AT THE CORRECT PH. THE LC IS RESPONSIBLE FOR FIELD VERIFYING SOIL AND SUITABILITY, AND ANY NECESSARY AMENDMENTS SHOULD BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE LA.
- THE LC WILL BE RESPONSIBLE FOR REMOVING EXISTING VEGETATION AS REQUIRED AND PREPARING PLANTING AREAS PRIOR TO INSTALLATION OF PLANT MATERIALS.
- THE LANDSCAPE CONTRACTOR WILL TEST PROJECT SOILS TO VERIFY THAT THE SOILS ON–SITE ARE ACCEPTABLE FOR PROPER GROWTH OF PLANT MATERIALS AND ADEQUATE DRAINAGE IN PLANT BEDS AND PLANTERS. THE LANDSCAPE CONTRACTOR WILL COORDINATE THE LOCATION, AND PROCUREMENT OF EXISTING ON–SITE SOIL SAMPLES WITH THE LANDSCAPE ARCHITECT. REPRESENTATIVE SAMPLES WILL BE SUBMITTED TO A CERTIFIED TESTING LABORATORY FOR ANALYSIS. THE FINDINGS, TOGETHER WITH RECOMMENDATIONS FOR AMENDING THE SOILS SHALL BE REVIEWED AND APPROVED BY THE OWNER AND LANDSCAPE ARCHITECT PRIOR TO DELIVERY AND INSTALLATION OF PLANT MATERIALS AT THE JOB.
- ALL PLANTING BEDS WILL BE STAKED AND OR PAINTED BY THE LC FOR APPROVAL BY THE LA, OWNER OR OWNER'S REPRESENTATIVE, PRIOR TO PLANT INSTALLATION. TREES WILL BE LOCATED WITH STAKES OR FLAGS FOR APPROVAL BY THE LA PRIOR TO INSTALLATION.
- ALL PROPOSED TREES WILL BE INSTALLED EITHER ENTIRELY IN OR ENTIRELY OUT OF PLANTING BEDS. PLANTING BED OUTLINES WILL NOT BE OBSTRUCTED AND WILL BE SMOOTH AND FLOWING. IF TREES ARE LOCATED OUTSIDE PLANTING BEDS IN SOD AREAS, MAINTAIN A MINIMUM 3' WIDE OFFSET.
- THE LC IS RESPONSIBLE FOR DETERMINING THE AMOUNT OF SOD OR SEED REQUIRED TO INSTALL LAWN AREAS ACCORDING TO THE LANDSCAPE PLANS. ANY ADDITIONAL SOD OR SEEDED AREAS ADDED TO THE PLANS DURING THE INSTALLATION PROCESS WILL BE PROVIDED BY THE LC AT A MUTUALLY AGREED UPON SQ. FT. UNIT COST. AREAS TO BE SODDED OR SEEDED WILL BE AMENDED PER SOILS REPORT TO PROVIDE REQUIRED NUTRIENTS AND SOIL PH OF BETWEEN 6.0 AND 7.0.
- THE LC SHALL BE RESPONSIBLE FOR THE STABILITY AND PLUMB CONDITION OF ALL INSTALLED PLANT MATERIALS AND REPLACING ANY DAMAGED PLANT MATERIAL WITH PLANTS OF EQUAL KIND, SIZE AND CONDITION AT NO ADDITIONAL COST TO THE OWNER. NO CHAINS OR CABLES ATTACHED TO THE TRUNK WILL BE USED WHEN INSTALLING PLANT MATERIALS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO PREVENT PLANTS AND TREES FROM FALLING OR BEING BLOWN OVER, AND TO REPLACE ALL PLANTS WHICH ARE DAMAGED DUE TO INADEQUATE GUYING OR STAKING, AT NO ADDITIONAL COST TO THE OWNER. THE CONTRACTOR WILL REMOVE ALL STAKING MATERIALS THE END OF THE WARRANTY PERIOD AND DISPOSE OFFSITE.
- ALL PLANTING BEDS WILL BE MULCHED WITH A 4 LAYER OF MULCH AS SPECIFIED. ALL TREES WILL HAVE A 4 THICK MUCH RING PLACED AROUND THE BASE OF THE TRUNK. THE LANDSCAPE SCOPE OF WORK INCLUDES MULCHING AS AN INTEGRAL PART OF THE PROJECT.
- ALL PLANT MATERIALS WILL RECEIVE ADEQUATE WATERING BY THE LC AS REQUIRED UNTIL FINAL ACCEPTANCE BY OWNER. IF AN IRRIGATION SYSTEM IS PRESENT OR PROPOSED, THE LC WILL COORDINATE SUPPLEMENTAL WATERING OF NEWLY PLANTED MATERIAL UNTIL IRRIGATION FULLY OPERATIONAL IS FULLY OPERATIONAL.
- ALL EXISTING PLANT BEDS WILL REMAIN WITHIN THE CONSTRUCTION LIMIT LINE SHALL BE LEFT UNDISTURBED. EXISTING TREES TO REMAIN, AS NOTED ON THE DRAWINGS, WILL BE LEFT UNDISTURBED AND PROTECTED BY BARRICADES ERECTED AT THE PERIMETER OF THE TREE DRIP LINE(S). NO VEHICLE WILL TRAVERSE THIS AREA NOR WILL ANY STORAGE OF MATERIALS OR EQUIPMENT BE PERMITTED WITHIN THE AREA OF THE TREE DRIPLINE(S). ANY EXISTING PLANT BEDS OR TREES DAMAGED BY CONSTRUCTION ACTIVITY WILL BE REPLACED BY THE RESPONSIBLE PARTY AT THEIR OWN EXPENSE.
- NO TREES WILL BE PLANTED WITHIN DESIGNATED UTILITY CORRIDORS, PUBLIC RIGHT OF WAY (WITHOUT RIGHT OF WAY UTILIZATION PERMIT) NOR ANY PLANTS LOCATED WITHIN FOUR FEET (4') OF ANY SWALE CENTERLINE IDENTIFIED ON THE DRAWINGS. FIELD ADJUSTMENTS AS NECESSARY AND REVIEW ADJUSTMENTS WITH THE LA PRIOR TO INSTALLATION.
- THE LC WILL BE RESPONSIBLE FOR PROVIDING EFFECTIVE TRAFFIC CONTROL AND REMOVAL OF ALL DEBRIS OFF–SITE ON A DAILY BASIS.
- THE PLANT QUANTITIES REPRESENTED ON THE LANDSCAPE CONTRACT DOCUMENTS ARE FOR THE CONVENIENCE OF THE LANDSCAPE CONTRACTOR. THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL QUANTITIES AND REPORTING ANY DISCREPANCIES TO THE LANDSCAPE ARCHITECT FOR CLARIFICATION PRIOR TO CONTRACT AWARD AND COMMENCEMENT OF WORK. QUANTITIES NECESSARY TO COMPLETE THE WORK ON THE DRAWING WILL BE FURNISHED BY THE LC. QUANTITY ESTIMATES HAVE BEEN MADE CAREFULLY, BUT THE LANDSCAPE ARCHITECT ASSUMES NO LIABILITY FOR OMISSIONS OR ERRORS. HIS ESTIMATES ARE ONLY AN AID FOR CLARIFICATION OF UNITS AND A CHECK FOR THE CONTRACTOR TO COMPARE WITH HIS OWN ESTIMATES. NO EXTRA COMPENSATION WILL BE ALLOWED FOR EXTRA QUANTITIES NECESSARY TO COMPLETE THE WORK AFTER EXECUTION OF THE CONTRACT DOCUMENTS. CONTRACTOR WILL BE RESPONSIBLE FOR INSTALLATION OF PLANT MATERIAL ACCORDING TO DRAWINGS.
- WARRANTY: ALL PLANTS WILL BE WARRANTED TO REMAIN ALIVE AND HEALTHY AND IN THRIVING CONDITION FOR ONE YEAR FROM THE DATE OF JOB ACCEPTANCE. PLANTS SHALL BE SPECIMEN QUALITY. PLANTS WILL BE SOUND, HEALTHY AND VIGOROUS, WELL BRANCHED, AND DENSELY FOLIATED WHEN IN LEAF.
- HEIGHT AND SPREAD DIMENSIONS SPECIFIED REFER TO THE MAIN BODY OF THE PLANT AND NOT FROM BRANCH TIP TO TIP. IF A RANGE OF SIZE IS GIVEN, NO PLANT WILL BE LESS THAN THE MINIMUM SIZE AND NOT LESS THAN 5 PERCENT OF THE PLANTS WILL BE AS LARGE AS THE MAXIMUM SIZE SPECIFIED.
- SHADE TREES WILL BE STRAIGHT UNLESS OTHERWISE SPECIFIED. SEE SPECIFICATIONS FOR FERTILIZER AND AMENDMENT ADDITIVES.
- THE TRUNK FLARE DEPTH FOR ALL TREES WILL BE VISIBLE AT +/– 2 INCHES ABOVE FINISH GRADE.

GENERAL LANDSCAPE NOTES (CONT.)

- WIRE BASKETS WILL HAVE TOP HALF CUT AWAY FROM BASKET HORIZONTALLY, LEAVING REMAINING OF BASKET. REMOVAL OF TOP HALF OF BASKET WILL BE COMPLETED WHEN LOWER HALF OF BALL IS INSTALLED INTO PREPARED PLANTING HOLE, TO MINIMIZE DISTURBANCE OF ROOT BALL. ALL STRAPPING WILL BE REMOVED AND DISPOSED OF AT TIME OF PLANTING.
- ALL B&B TREES WILL BE MOVED WITH STRAPPING CONNECTED TO WIRE BASKET ONLY, NEVER ATTACHED DIRECTLY TO TREE TRUNK. CONTAINER PLANTS WILL BE MOVED IN A WAY THAT IS COMPLETELY SUPPORTED BY THE CONTAINER, NOT THE TREE TRUNK.
- ALL TREES WILL BE INSTALLED WITH MOST ATTRACTIVE SIDE FACING PREDOMINANT POINT OF VISIBILITY .
- ALL LANDSCAPE BEDS WILL BE EDGED AS SHOWN IN LANDSCAPE DETAILS.
- LC WILL INSPECT ALL DELIVERED PLANT MATERIAL TO ENSURE ALL TREE ROOTS ARE STURDILY ESTABLISHED IN BALL THAT HAS BEEN TIGHTLY WRAPPED AND SECURELY TIED WITH TWINE OR WIRE, OR PINNED.
- TREES SPECIFIED TO HAVE CLEAR TRUNK HEIGHT SHALL BE PURCHASED FROM THE NURSERY WITH SAID CLEAR TRUNK HEIGHT, NOT FIELD–PRUNED BY CONTRACTOR.
- LC WILL PROVIDE PRE–EMERGENT HERBICIDE IN ALL AMENDED PLANTING BEDS WITH EXCEPTION OF SEEDED AREAS.
- LC WILL BACK–FILL ALL PLANTINGS WITH $\frac{2}{3}$ CULTIVATED EXISTING SOILS 9FREE OF CLUMPS AND ROCKS) & $\frac{1}{3}$ JOHN DEERE LANDSCAPE MIX OR EQUIVALENT.
- LC WILL PREPARE ALL PERENNIAL AND ANNUAL COLOR BEDS PER LANDSCAPE DETAILS AND APPLY MIRACLE GROW AND SLOW RELEASE FERT. AS SEASONALLY APPROPRIATE.
- GRASS ALL DISTURBED AREAS (INCLUDING RIGHT–OF–WAY), UNLESS OTHERWISE INDICATED. AREAS TO BE SODDED SHALL BE CLEANED OF ALL STONES AND DEBRIS, RAKED SMOOTH AND CONFORM TO PROPOSED GRADES. IF SODDED, SOD SHALL BE ROLLED TO PROVIDE A CONSISTENTLY EVEN SURFACE.
- LC WILL INSTALL ALL WARRANTY MATERIAL PER ORIGINAL LANDSCAPE NOTES & DETAILS IN PLANS.
- AUTOMATIC IRRIGATION SYSTEM SHALL BE PROVIDED FOR ALL NEWLY PLANTED AREAS. DESIGN AND INSTALLATION SHALL BE THE RESPONSIBILTY OF THE CONTRACTOR. IRRIGATION SYSTEM DESIGN SHALL BE PROVIDED TO OWNER/LANDSCAPE ARCHITECT FOR APPROVAL PRIOR TO CONSTRUCTION. SYSTEM SHALL PROVIDE 100% COVERAGE IN ACCORDANCE WITH SPRINKLER HEAD MANUFACTURER'S SPECIFICATIONS.
- CONTRACTOR / LANDSCAPE CONTRACTOR PLEASE NOTE:
  LANDSCAPE CONTRACTOR WILL PROVIDE PHOTOGRAPHS OF ALL TREES, SHRUBS, & GROUNDCOVER MATERIAL TO LANDSCAPE ARCHITECT PRIOR TO DELIVERY TO JOB SITE FOR APPROVAL.

LANDSCAPE DETAILS AND NOTES

0 15 30 60 120
SCALE: 1 = 30

NORTH

PAULSON MITCHELL
INCORPORATED
Voice 770.650.7685
Fax 770.650.7684

PROJECT:

RIVERPOINTE
PLAZA PHASE 2
1046 & 1050 W. MERCURY BLVD.
HAMPTON, VIRGINIA 23666

FOR:

KB
RIVERDALE,
LLC
2743 PERIMETER PARKWAY
BLDG. 100, SUITE 370
AUGUSTA, GA 30909
PH. (706) 854-8714

REVISIONS

4	10.04.16	CITY COMMENTS
5	10.13.16	CITY COMMENTS

va811.com Dig With CARE
BEFORE YOU DIG, CALL MISS UTILITY 1-800-552-7001

24 HR EMERGENCY CONTACT
MARK SENN

2014169la–2.dwg 06.28.16

LANDSCAPE DETAILS AND NOTES

SHEET LA-600

SP 2016–0020

Order Plans @ www.LDline.com