

PURPOSE

4VAC50-60-54 of the Virginia Stormwater Management Program (VSMPP) Permit Regulations requires that Stormwater Pollution Prevention Plan (SWPPP) be developed for all regulated land disturbing activities.

The plan for implementing pollution prevention measures during construction activities developed on this sheet must be implemented and updated as necessary. Any PPP requirements not included on this sheet must be incorporated into the SWPPP required by 4VAC50-60-54 that must be developed before land disturbance commences.

OTHER REFERENCED PLANS

SWPPP requirements may be fulfilled by incorporating, by reference, other plans. All plans incorporated by reference become enforceable under the VSMPP Permit Regulations and General Permit VAR10 for Discharges of Stormwater from Construction Activities.

Table with 2 columns: Independent Plans Incorporated by Reference, Date Approved. Rows include Stormwater Management Plans, Spill Prevention, Control, and Countermeasure Plans, Off-Site Stockpile, and Off-Site Borrow Area.

POTENTIAL POLLUTANT SOURCES

The following sources of potential pollutants must be addressed in the Pollution Prevention Plan. Various controls and/or measures designed to prevent and/or minimize pollutants in stormwater discharges from the project site must be applied to the sources found on the site.

LEAKS, SPILLS, AND OTHER RELEASES

- The operator(s) shall ensure procedures are in place to prevent and respond to all leaks, spills and other releases of pollutants.
The operator(s) shall ensure all leaks, spills and other releases of pollutant are contained and cleaned immediately upon discovery.
The operator(s) shall ensure spill containment kits containing appropriate materials (e.g., absorbent material and pads, brooms, gloves, sand, etc.) are available at appropriate locations, including, but not limited to: designated areas for vehicle and equipment maintenance; vehicle and equipment fueling; storage and disposal of construction materials, products, and waste; and storage and disposal of hazardous and toxic materials and sanitary waste facilities.

Table with 3 columns: Date, Shown on Plan Sheet #, Location. Includes a REVISIONS TO LOCATIONS section.

- The operator(s) shall notify the Department of Environmental Quality of leaks, spills, and other releases that discharge to or have the potential to discharge to surface waters immediately upon discovery of the discharge but in no case later than 24 after the discovery.
The operator(s) shall notify the Department of Environmental Quality (DEQ) of leaks, spills, and other releases that discharge to or have the potential to discharge to surface waters immediately upon discovery of the discharge but in no case later than 24 after the discovery. Written notice of the discharge must be sent to DEQ and Henrico County Department of Public Works within five (5) days of the discovery.

Contact information for Virginia Department of Environmental Quality and Goochland County Department of Environment and Land Development.

EQUIPMENT / VEHICLE WASHING

- Washing must be conducted in a dedicated area that is located to maximize the distance from storm drain inlets, ditches, waterbodies or wetlands but no less than 50 feet from those features.
All wash water used in vehicle wheel washing must be directed to a sediment basin/trap.
All vehicle washing operations other than wheel washing must have secondary containment.
Each facility must have appropriate signage to inform users where the dedicated area(s) are located.

Table with 4 columns: Activity, Location of Dedicated Area(s), Shown on Plan Sheet #, Water Source Location. Includes a REVISIONS TO LOCATIONS section.

VEHICLE FUELING AND MAINTENANCE

- Conduct regular maintenance in a dedicated area that is located to maximize the distance from storm drain inlets, ditches, waterbodies or wetlands but no less than 50 feet from those features.
If fueling is conducted at a dedicated area, the location must be located to maximize the distance from storm drain inlets, ditches, waterbodies or wetlands but no less than 50 feet from those features.
The dedicated areas must be designed to eliminate the discharge of spilled and leaked fuels and chemicals from vehicle fueling and maintenance activities by providing secondary containment (spill berms, decks, spill containment pallets, providing cover where appropriate, and having spill kits readily available).
Each facility must have appropriate signage to inform users where the dedicated area(s) are located.

Table with 4 columns: Date, Shown on Plan Sheet #, Location of Dedicated Area(s), Operator's Initials. Includes a REVISIONS TO LOCATIONS section.

- If mobile fueling will be used, the fueling must be done in an area that located to maximize the distance from storm drain inlets, ditches, waterbodies or wetlands but no less than 50 feet from those features.
Spill kits must be readily available at all mobile fueling locations.
On-site storage tanks must have a means of secondary containment (spill berms, decks, spill containment pallets, etc.) and must be covered where appropriate.
All vehicles on site must be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage.

DISCHARGE FROM STORAGE, HANDLING, AND DISPOSAL OF CONSTRUCTION PRODUCTS, MATERIALS, AND WASTE

- Storage of construction products, materials, and waste is to be conducted in dedicated areas.
The dedicated area must be located to maximize the distance from storm drain inlets, ditches, waterbodies or wetlands but no less than 50 feet from those features. Separations of less than 50 feet may be approved by the Environmental Inspector.
The dedicated areas must be designed to minimize the discharge of pollutants from storage, handling, and disposal of construction products, materials and wastes including (i) building products such as asphalt sealants, copper flashing, roofing materials, adhesives, concrete admixtures, (ii) pesticides, herbicides, insecticides, fertilizers, and landscape materials, and (iii) construction and domestic wastes such as packaging materials, scrap construction materials, masonry products, timber, pipe and electrical cuttings, plastics, Styrofoam, concrete and other trash or building products.
Each facility must have appropriate signage to inform users where the dedicated area(s) are located.

Table with 4 columns: Date, Shown on Plan Sheet #, Location(s) of Dedicated Area(s) for storage of construction products and materials, Operator's Initials. Includes a REVISIONS TO LOCATIONS section.

Table with 4 columns: Date, Shown on Plan Sheet #, Location(s) of Dedicated Area(s) for waste from construction products and materials, Operator's Initials. Includes a REVISIONS TO LOCATIONS section.

- Follow all federal, state, and local requirements that apply to the use, handling and disposal of pesticides, herbicides, and fertilizers.
Keep chemicals on site in small quantities and in closed, well marked containers.
Clean up solid waste, including building materials, garbage, and debris on a daily basis and deposit into covered dumpsters that are periodically emptied.
Schedule waste collection to prevent exceeding the capacity of onsite containers. Additional containers may be necessary depending on the phase of construction (e.g., demolition, etc.).
Dispose of all solid waste at an authorized disposal site.
Ensure that containers have lids or are otherwise protected from exposure to precipitation.

DISCHARGES FROM OTHER POTENTIAL POLLUTANT SOURCES





- Discharges from other pollutant sources (e.g., water line flushing, storm sewer flushing, above ground storage tanks, etc.) not mentioned elsewhere must be addressed.
Above ground oil storage tanks with a storage capacity exceeding 1,320 gallons and have a reasonable expectation of a discharge into or upon Waters of the United States are required to have a Spill Prevention Control and Countermeasure (SPCC) Plan.
The discharge of contaminated flush water and material removed during flushing operations must be collected and disposed of in accordance with appropriate federal, state, and local requirements.

DISCHARGES FROM CONCRETE RELATED WASH ACTIVITIES

- Concrete trucks are not allowed to wash out or discharge surplus concrete or drum wash water on site except in a dedicated area(s) that is located to prevent discharge to storm drain inlets, ditches, waterbodies or wetlands but no less than 50 feet from those features.
Each facility must have a stabilized access to prevent mud tracking into the street.
Each facility must have appropriate signage to inform users where the dedicated area(s) are located.

Table with 4 columns: Date, Shown on Plan Sheet #, Location of Dedicated Area(s), Operator's Initials. Includes a REVISIONS TO LOCATIONS section.

- Facilities must be cleaned, or new facilities constructed, once the washout area is two-thirds (2/3) full.

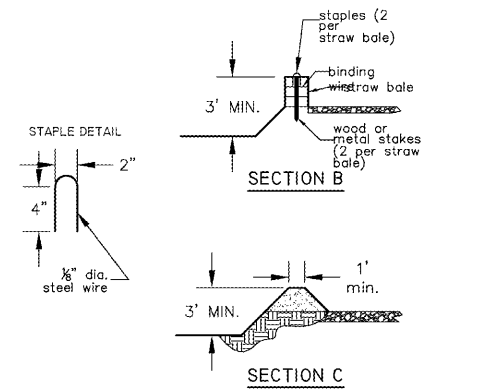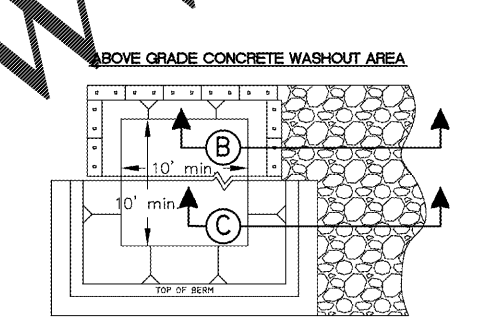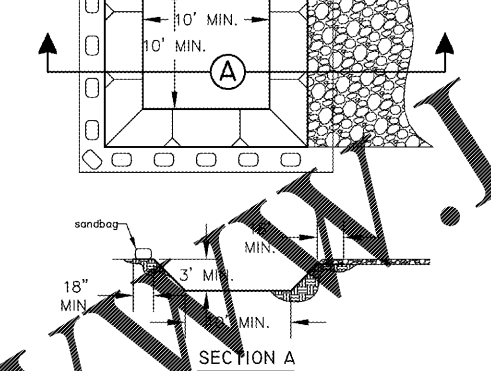

- The facility must be lined with 10 mil plastic lining that is free from holes, tears, or other defects that might compromise the material's impermeability.
The lining must be anchored with staples (2 spacing) or sandbags.
Side slopes must be 1:1 (horizontal:vertical) or flatter.
Stone access must be provided between the street and the concrete washout area.
A "Concrete Washout" sign must be installed within 30 feet of the washout facility. The sign must be no smaller than 2' tall by 4' wide.

DISCHARGES OF SOAPS, DETERGENTS, SOLVENTS, AND WASH WATER FROM CONSTRUCTION ACTIVITIES SUCH AS CLEANUP OF STUCCO, PAINT, FORM RELEASE OILS, AND CURING COMPOUNDS

- Washing activities associated with construction activities other than vehicle and equipment washing, such as clean up of stucco, paint, form release oils, and curing compounds are to be conducted in a dedicated area.
The dedicated areas must be located to maximize the distance from storm drain inlets, ditches, waterbodies or wetlands but no less than 50 feet from those features. Separations of less than 50 feet may be approved by the Environmental Inspector.
The dedicated areas must be designed to prevent the discharge of soaps, detergents, solvents, and wash water.

Table with 4 columns: Date, Shown on Plan Sheet #, Location(s) of Dedicated Area(s), Operator's Initials. Includes a REVISIONS TO LOCATIONS section.

- The dedicated area must be covered (e.g., plastic sheeting, temporary roof, etc.) to prevent contact with stormwater.
The contaminated wastewater from the dedicated areas must be collected for disposal by a waste hauler or discharged to the sanitary sewer.
In situations where these pollutants are or could be generated at locations other than at the designated area (e.g., concrete pours, building washing, etc.), cover (e.g., plastic sheeting, temporary roof, etc.) must be provided to prevent contact with stormwater and the contaminated wastewater from the facility must be collected for disposal by a waste hauler or discharged to the sanitary sewer.

DISCHARGES OF HAZARDOUS, TOXIC, AND SANITARY WASTE

- Storage and disposal of hazardous, toxic and sanitary wastes are to be conducted in dedicated areas.
The dedicated areas must be located to maximize the distance from storm drain inlets, ditches, waterbodies or wetlands but no less than 50 feet from those features. Separations of less than 50 feet may be approved by the Environmental Inspector.
The dedicated areas must be designed to prevent the discharge of hazardous, toxic and sanitary waste by avoiding contact with precipitation.
Each facility must have appropriate signage to inform users where the dedicated area(s) are located.

Table with 4 columns: Date, Shown on Plan Sheet #, Location(s) of Dedicated Area(s) for storage and disposal of hazardous and toxic wastes, Operator's Initials. Includes a REVISIONS TO LOCATIONS section.

Table with 4 columns: Date, Shown on Plan Sheet #, Location(s) of Dedicated Area(s) for portable toilets, Operator's Initials. Includes a REVISIONS TO LOCATIONS section.

- Consult with local waste management authorities or private firms about the requirements for disposing of hazardous materials and/or soils that may be contaminated with hazardous materials.
Never remove the original product label from the container. Follow the manufacturer's recommended method of disposal.
Schedule periodic pumping of portable toilets and dispose of waste.
Dispose of all solid waste at an authorized disposal site.

SWPPP MODIFICATIONS AND REVISIONS

- The operator(s) shall ensure the SWPPP is modified and/or revised to reflect:
Changes in qualified personnel, delegated authorities or other personnel required as a condition of the General Construction Permit;
Changes in site conditions;
Changes in the design, construction, operation, or maintenance of the construction site that affect the potential for discharges of pollutants that are not addressed in the normal implementation of the plan; and
Ineffective control measures identified during inspections or investigations conducted by the operator's qualified personnel or local, state or federal officials.
Modifications/revisions to the SWPPP shall include additional or modified control measures to address the identified deficiencies.
If the necessary modifications/revisions require approval by the Administrator or DEQ, the modifications/revisions must be implemented no later than seven (7) calendar days following approval.
If the necessary modifications/revisions do not require approval by the Administrator, the modifications/revisions must be implemented prior to the next anticipated storm event or as soon as practicable.

SWPPP UPDATES

- The operator(s) shall update the SWPPP to include:
A record of dates when 1) major grading activities occur, 2) construction activities temporarily or permanently cease on a portion of the site, and 3) stabilization measures are initiated;
Documentation of modifications and revisions to the SWPPP;
Areas that have reached final stabilization where no further SWPPP or inspection requirements apply;
All properties that are no longer under the legal control of the operator and the dates on which the operator no longer had legal control over each property; and
The date, volume, and corrective/preventative actions implemented for any prohibited discharge.

OPERATOR INSPECTIONS

- The operator(s) identified below shall provide inspections of the permitted land-disturbing activities by the qualified personnel identified below. The inspections will be conducted (select one the following options):
A. Site is located within a TMDL Impaired Watershed:
at least once every four (4) days; or
at least once every five (5) days and no later than 48 hours following a storm event that produces 0.25 inches of rain or more over 24 hours.
B. Site is not located within a TMDL Impaired Watershed:
at least once every five (5) days; or
at least once every ten (10) days and no later than 48 hours following a storm event that produces 0.25 inches of rain or more over 24 hours.

Where areas are in a stabilized condition or runoff is unlikely due to winter conditions, the inspection frequency may be reduced to once every 30 days while these conditions exist. Otherwise, the operator(s) shall resume the regular inspection frequency identified above.

The operator(s) shall provide for inspections of the permitted land-disturbing activity to ensure implementation and continued maintenance of all requirements of the Stormwater Pollution Prevention Plan (Erosion and Sediment Control Plan, Stormwater Management Plan, Pollution Prevention Plan, TMDL requirements, etc.).

ACKNOWLEDGEMENTS

- I certify under penalty of law that the qualified personnel identified below:
has been designated by the Operator to conduct inspections of the permitted site;
is knowledgeable in the principles and practices of erosion and sediment control and stormwater management;
possesses the skills to assess conditions at the permitted site for the Operator(s) that could impact stormwater quality and quantity;
will assess the effectiveness of any erosion and sediment control measures or stormwater management facilities selected to control the stormwater discharges from the permitted site; and
will conduct inspections in accordance with the frequency noted above in the OPERATOR INSPECTIONS section of this sheet.

Table with 2 columns: Name (print), Phone. Includes a note: Additional information is located in Tab 6 of the SWPPP Binder.

As the Operator(s) or Delegated Authority, I/we understand that prior to initiating land disturbance, the potential pollutant sources, appropriate control measures, and all responsible parties (operator, qualified inspection personnel, contractors, etc.) required as a condition of the General Construction Permit (GCP) and the Stormwater Pollution Prevention Plan (SWPPP) must be identified. I also understand this information must be updated as necessary throughout all phases of construction until the GCP is terminated.

I/we certify under penalty of law that I/we have read and understand all requirements of the SWPPP (erosion and sediment control plan, stormwater management plan, pollution prevention plan, TMDL provisions, administrative requirements, etc.) and GCP and that the information herein is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment for knowing violations.

I/we understand that I/we are ultimately responsible for compliance with all conditions and requirements of the SWPPP and GCP and for ensuring all contractors and subcontractors on the permitted site are aware of the conditions and requirements of the SWPPP and GCP.

I/we shall comply with all conditions and requirements of the SWPPP and shall at all times properly operate and maintain all measures and control (and related appurtenances) which are installed or used to achieve compliance with the conditions of the GCP. Proper operation and maintenance also includes adequate funding and adequate staffing.

I/we shall take all reasonable steps to minimize or prevent any discharge in violation of the SWPPP and/or GCP.

I/we understand that if it determined by the Department of Environmental Quality (DEQ) in consultation with the State Water Control Board at any time that stormwater discharges are causing, have reasonable potential to cause, or contribute to and excursion above any applicable water quality standard, the DEQ may, in consultation with the Administrator, take appropriate enforcement action and require:

- Modification of control measures to adequately address water quality concerns;
Submission of valid and verifiable data and information that are representative of ambient conditions and indicate that the receiving water is attaining water quality standards; or
Cessation of discharges of pollutants from construction activity and submit an individual permit application according to 4VAC25-370-410.

Table with 3 columns: Name (print), Signature, Date. Includes a note: Additional contact information can be found in the SWPPP Binder.

Project information: KHA PROJECT 110499001, DATE 02/06/2019, SCALE AS SHOWN, DESIGNED BY JLM, DRAWN BY JLM, CHECKED BY RSS. Includes logos for Kimley-Horn and Professional Engineer Ross Stevens. SHEET NUMBER C-150.

Vertical text on the left edge: Project: Erosion Control, Sheet: C-150, Date: 02/06/2019, Scale: AS SHOWN, Designer: JLM, Drawer: JLM, Checker: RSS.