


**NOTES**

1. ALL HVAC SENSORS (I.E. ANALOG TEMPERATURE SENSORS, RELATIVE HUMIDITY SENSORS, CO2 SENSORS) TO BE MOUNTED AT 7'-6" ABOVE FINISHED FLOOR.
2. LIGHTING OVERRIDE SWITCHES TO BE MOUNTED AT 6'-4" ABOVE FINISHED FLOOR.
3. DOOR ALARM OUTPUTS TO BE WIRED TO THE SPARE DIGITAL INPUT OF CASE CONTROLLER. MULTIPLE EVAPORATORS IN A BOX SHOULD BE DAISY-CHAINED TOGETHER.
4. ISLAND DESIGNATED AS DUAL TEMP WILL HAVE AN OEM INSTALLED TOGGLE SWITCH ON EACH SECTION WIRED TO THE RESPECTIVE CASE CONTROLLER SPARE DIGITAL INPUT.

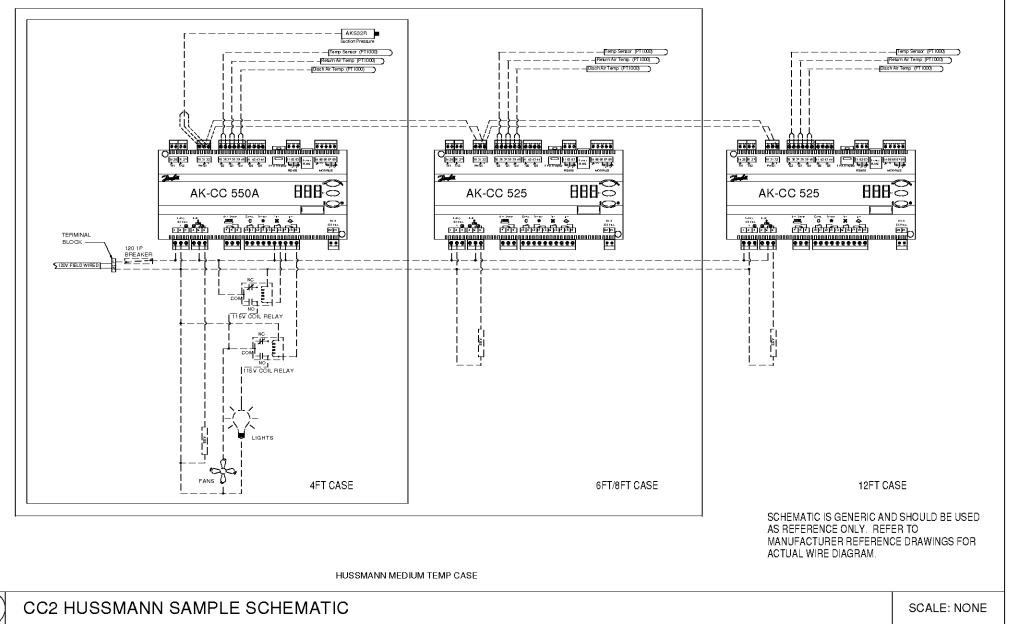

2" REFERENCE LINE

**Order Plans**

OWNERSHIP OF INSTRUMENTS OF SERVICE  
 All records, plans, specifications, drawings, schedules, and data, whether prepared by the Consultant or otherwise, shall remain the property of the Consultant. The Consultant shall retain the right to use any or all of the same in any future work.