

1705 S. Walton Blvd., Suite 3 Bentonville, Arkansas 72712 www.hfa-ae.com

REVIEW

100%

HECKED BY

DRAWN BY: DOCUMENT DATE

09/27/19

(1) 2" CONDUIT FROM OP LOW VOLTAGE CABINET AND (1) 2" CONDUIT FROM OFFICE, AND(1) 3" LOW VOLTAGE CONDUIT FROM LOW VOLTAGE CABINET.E.C. TO REFER TO A002 DRAWINGS FOR EXACT LOCATION AND STUB-UP DIMENSIONS.

COLLINE COLLIN

THE LEGRAND WIREMOLD TRENCHDUCT SYSTEM SHALL INCLUDED THE FOLLOWING COMPONENTS:


(5) 12"X12"X 3 1/4" SECTIONS WITH (5)12"X12" COVERPLATES
(3) 6"X12"X 3 1/4" SECTIONS WITH (18) 12"X12" COVERPLATES
(2) 12"X3 1/4" 45 DEGREE SECTION WITH COVER PLATE

GC SHALL NOTE PENETRATE/DRILL COVERPLATES. IN AREAS WHERE MC OR DATA CABLES NEED TO EXIT THE TRENCH, COVERPLATES SHALL BE REMOVED.

REF E120 FOR LOW VOLTAGE DEVICES

EC TO UTILIZE THE TILE TRIM ACCESSORY FOR A FLUSH FINISH.

SHOWN IS FOR DIAGRAMMATIC LY. ELECTRICAL CONTRACTOR IS FOR WIRING ALL DEVICES AND EQUIPMENT INSTALLED ABOVE CPI PANEL SHALL NOTE MOUNTED SUCH THAT IT DOES NOT EXTEND MORE THAN 6 INCHES BEYOND THE FRONT OF THE ELECTRICAL EQUIPMENT PER NEC NO OUTSIDE VENDOR EQUIPMENT TO BE INSTALLED INSIDE CPI LOW VOLTAGE CABINET

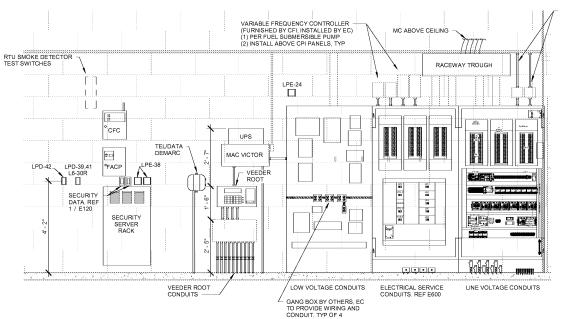

ELECTRICAL DETAILS

ELECTRICAL - CASH WRAP DETAILS

UTILITY ROOM

E504