

NOTES




1. WHEN DESIGN IS NOT TO BE OPENED, THE 1/2" CURB SHOULD BE OPENED WITH THE 1/2" CURB OPENING AT 10' TO 12' INTERVALS. SEE STANDARD DRAWING 625-305-00 FOR DETAILS.
2. TO MAINTAIN PROPER DRAINAGE, GRADE SHOULD BE SLOPED TOWARD STREET WITH A SLOPE OF 0.01 TO 0.05.
3. SEE DETAIL 750-105-01 FOR ADDITIONAL NOTES.

REFERENCES

STANDARD DRAWING

625-305-00

STANDARD MARKINGS FOR INTERSECTIONS

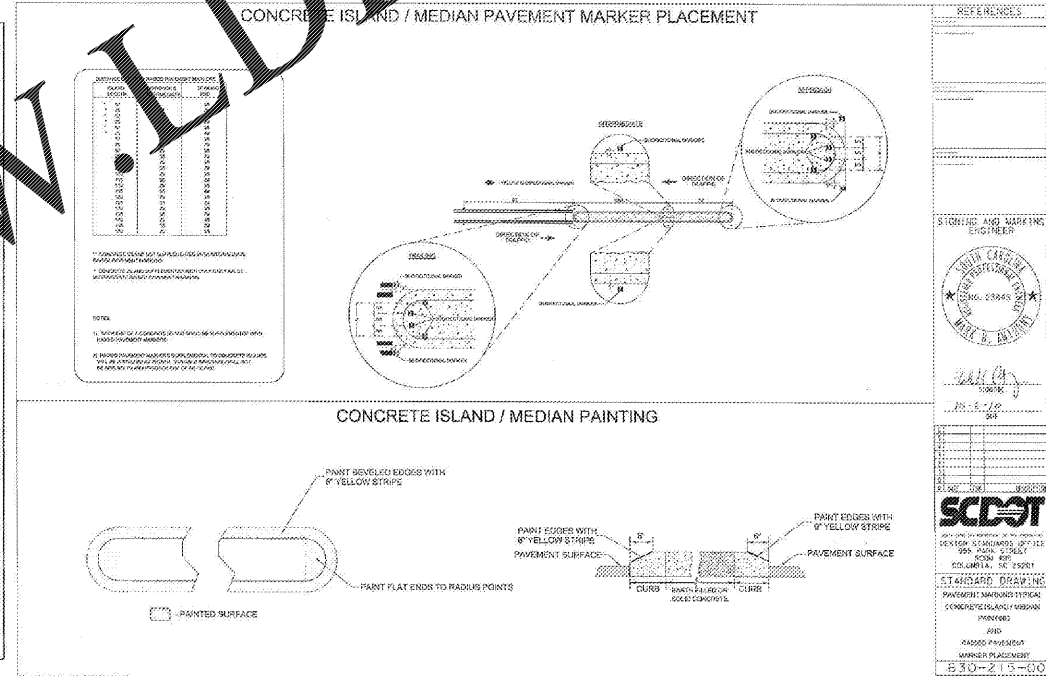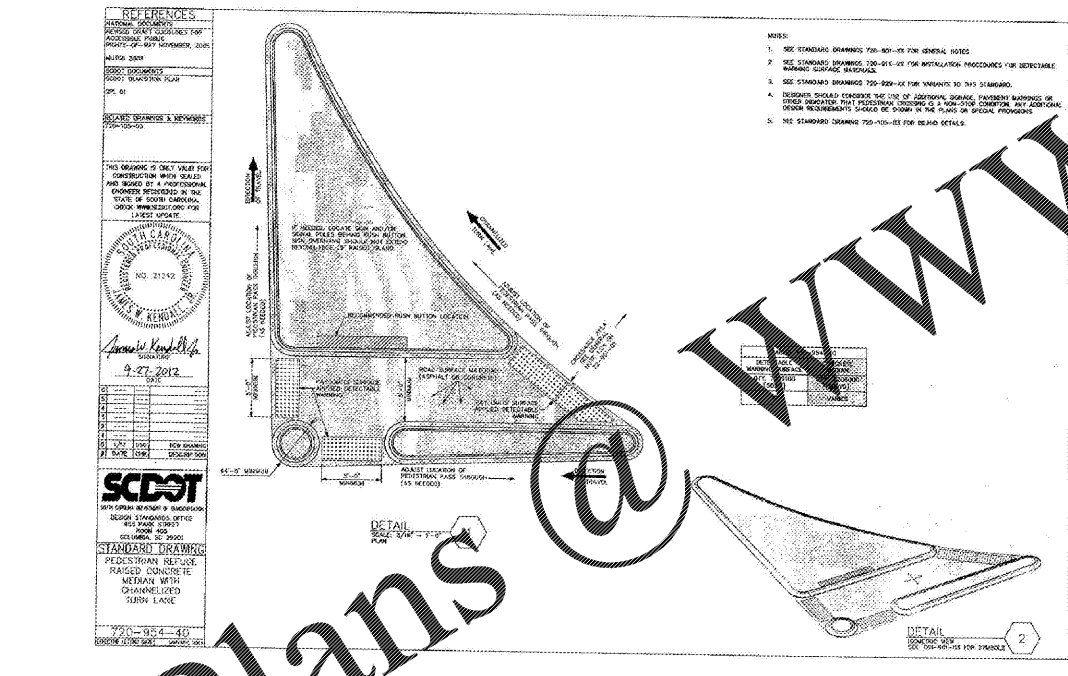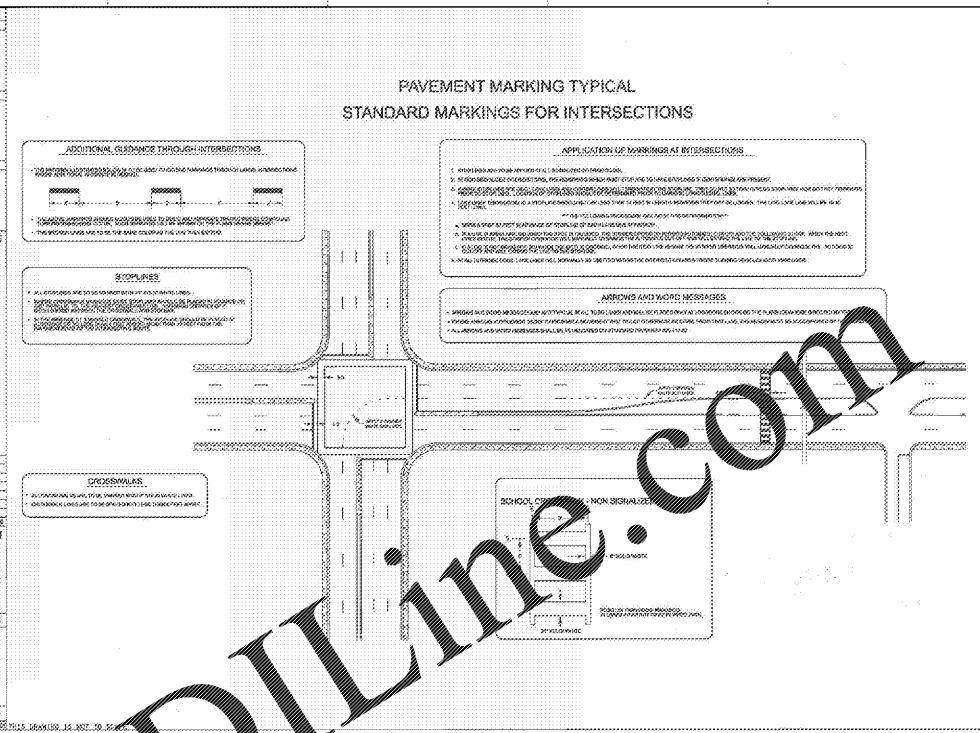

GMC

617 East McBee Ave
Suite 200
Greenville, SC 29601
T 864.527.0480
GMCNETWORK.COM

ISSUE DATE
BID DOCUMENTS 10.24.19

DRAWN BY: JMG
CHECKED BY: DHT

MILLBROOK ELEMENTARY
SCHOOL - ADDITIONS AND
RENOVATIONS
255 E PINE LOG RD, AIKEN, SC 29803
GMC # CGRE190013

C-608

Order Plans @

WWW.WLDILINE.COM

