

KEYNOTES	
NUMBER	NOTE
1101	PROVIDE SEMI-RECESSED (OWB SUBSTRATE) FIRE EXTINGUISHER CABINET AND EXTINGUISHER PER LEGEND, SHEET G-101. SEE ELEVATION D1A-A01 FOR TYPICAL MOUNTING HEIGHT. COORDINATE W/ 2012 GEORGIA FIRE PREVENTION CODE AND ACCESSIBILITY REQUIREMENTS.
1104	SOFFIT/HEADER ABOVE SHOWN DASHED, TYP.
1107	COUNTER AND/OR CABINET MILLWORK BY GENERAL CONTRACTOR, U.N.O.
1108	BROCHURE SHELVING BY GENERAL CONTRACTOR, REFERENCE ELEVATION AND DETAILS DRAWINGS.
1109	NEW WC, REFER TO PLUMBING DRAWINGS.
1110	NEW MOP SINK, REFER TO PLUMBING DRAWINGS.
1111	PROVIDE 1/4" COPPER WATER LINE WITH EMERGENCY SHUT-OFF VALVE FOR REFRIGERATOR WITH ICEMAKER BY GC. REF. PLUMBING DOCUMENTS AND EQUIPMENT PLAN.
1123	NEW ELECTRICAL PANEL AS REQUIRED. REFER TO ENG. DRAWINGS FOR ADDITIONAL INFORMATION.
1124	PROVIDE HOT/ COLD WATER SUPPLY WITH EMERGENCY SHUT-OFF VALVE, VENT AND DRAIN AT SPECIFIED SINK ASSEMBLY.
1125	PROVIDE NEW 4" SLAB ON GRADE OVER EXISTING CRUSHED STONE AT 4000 PSI WITH 6X6 W2.9X@2.9 WWF WELDED WIRE MESH. PROVIDE 10 MIL VAPOR BARRIER. FLOAT NEW SLAB TO PROVIDE UNIFORM AND LEVEL FINISHED CONDITION THROUGHOUT SPACE. VERIFY EXTENTS OF EXISTING SLAB.
1136	PROVIDE ONE LAYER OF 5/8" GMB AND ACOUSTICAL INSULATION TO EXISTING DEMISING WALL.
1137	REPLACE WOOD FRAMED WALL ABOVE STOREFRONT WITH 3 5/8" METAL STUD WALL TO DECK WITH SLIP TRACK AND EXTERIOR GYPSUM SHEATHING ON EXTERIOR SIDE OF FRAMING. WALL TO HAVE ACOUSTICAL INSULATION AND BE SEALED TIGHT TO ROOF STRUCTURE AND DECK.
1138	REPLACE WINDOW TINT. GC TO PROVIDE SAMPLES FOR OWNER SELECTION.
1139	SQUARE COLUMN WRAP. WIDTH AND FURRING WALL CONDITIONS TO MATCH EXISTING. LENGTH AT TOP AND BOTTOM OF NEW WRAP TO MATCH EXISTING LENGTH AT CEILING.
1140	APPLY BREAK METAL WRAP TO STOREFRONT SIDE OF COLUMN FURRING. PAINT TO MATCH ADJACENT WALLS.

CONSTRUCTION PLAN NOTES

G1. BRACE PARTITIONS TO STRUCTURE IN ACCORDANCE WITH MOST UP-TO-DATE INTERNATIONAL BUILDING CODE SECTION AND ASCE FOR SEISMIC SUPPORT. COORDINATE WITH LOCAL JURISDICTION FOR RELEVANT ISSUE OF LISTED CODE REFERENCES AND FOR ANY LOCAL OR STATE CODE AMENDMENTS.

G2. PARTITION COMPONENTS SHALL PROVIDE A FIRE RESISTIVE ASSEMBLY WITH FIRE RATINGS AS NOTED FOR EACH TYPE. MATERIALS AND COMPONENTS OF PARTITION ASSEMBLY AND MATERIAL WITHIN WALL SHOULD BE NON-COMBUSTIBLE OR FIRE RESISTIVE TREATED MATERIAL.

G3. DOOR HARDWARE FUNCTION SHALL PROVIDE MECHANICAL FREE EGRESS TO EGRESS SIDE OF DOOR.

G4. REFERENCE G SHEETS FOR PARTITION TYPES.

G5. PROVIDE FIRE EXTINGUISHERS PER INTERNATIONAL FIRE CODE. COORDINATE WITH LOCAL JURISDICTION FOR RELEVANT ISSUE OF LISTED CODE REFERENCES AND FOR ANY LOCAL OR STATE CODE AMENDMENTS. G.C. TO COORDINATE FINAL PLACEMENT AND QUANTITIES OF FIRE EXTINGUISHERS. FIRE MARSHAL ON SITE EXTINGUISHERS IN COMMONLY OCCUPIED / CUSTOMER AREAS SHALL BE IN SEMI-RECESSED CABINETS, UNO.

G6. ALL ANGLES ARE PARALLEL, UNLESS OTHERWISE NOTED OR 45 DEGREES UNLESS NOTED OTHERWISE.

G7. VERIFY DIMENSIONS AND REFERENCES EXISTING BUILDING ELEMENTS IN FIELD.

G8. BUILDING ELEMENTS MATERIALS TO BE NEW CONSTRUCTION, UNO.

G9. ALIGNMENT INDICATION SHALL BE FINISHED SURFACE TO FINISH SURFACE.

G10. DIMENSIONS ARE FROM FACE OF FINISHED SURFACE ON NEW PARTITION SURFACE, UNO.

G11. CENTERLINE DIMENSIONS SHALL BE MEASURED FROM CENTERLINE OF ASSEMBLY, FIXTURE, OR DEVICE.

G12. ALL TRADES AND GENERAL CONTRACTOR(S) SHALL REFERENCE ALL ASSOCIATED DRAWINGS (ENGINEERING, VENDOR SHOP DRAWINGS PROVIDED BY OWNER, ETC.) AND COORDINATE REQUIREMENTS FOR INSTALLATION OF ALL SPECIFIED SYSTEMS.

G13. PROVIDE SECURE CONSTRUCTION SITE PERIMETER DURING CONSTRUCTION. IF FACILITY WILL BE OCCUPIED AND OPEN FOR BUSINESS DURING OPERATING HOURS. PROVIDE TEMPORARY PARTITIONS / BARRIERS TO SEGREGATE WORK AREAS FROM BUSINESS OPERATION AREAS TO MAINTAIN EMPLOYEE AND CUSTOMER SAFETY. REQUIRED MEANS OF EGRESS & EXITS SHALL BE MAINTAINED AT ALL TIMES DURING CONSTRUCTION.

INTERIOR PARTITION TAG LEGEND



CORE MATERIAL	CORE SIZE (NOMINAL)				
	S	W	C	M	H
0	7/8"				2 1/2"
1	1 5/8"				2 1/2"
2	2 1/2"	2x (flat)			2 1/2"
3	3 5/8"				2 1/2"
4	4"	2x4	4"	4"	4"
5					6"
6	6"	2x6	6"	6"	6"
7					6"
8	8"	2x8	8"	8"	6"
9					6"
10					10"
11					10"
12					12"

ACOUSTICAL INSULATION
PROVIDE ACOUSTICAL INSULATION AT TAGGED LOCATIONS

PARTITION TYPE SUFFIX
REFER TO SCHEDULE BELOW

INTERIOR PARTITION TYPE SUFFIXES

B	5/8" GYPSUM BOARD ON BOTH SIDES; EXTEND TO 6" ABOVE CEILING (OR HARD CEILING WHERE IT OCCURS)
D	5/8" GYPSUM BOARD ON ROOM SIDE ONLY; EXTEND TO DECK
E	5/8" GYPSUM BOARD ON ROOM SIDE ONLY; EXTEND TO 6" ABOVE CEILING (OR HARD CEILING WHERE IT OCCURS)
F	1 1/2" GYPSUM BOARD ON ROOM SIDE ONLY (2 LAYERS); 400CH20-34 WALL STUD; EXTEND TO DECK

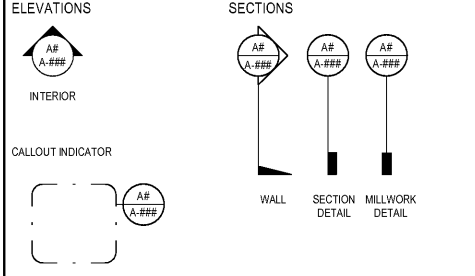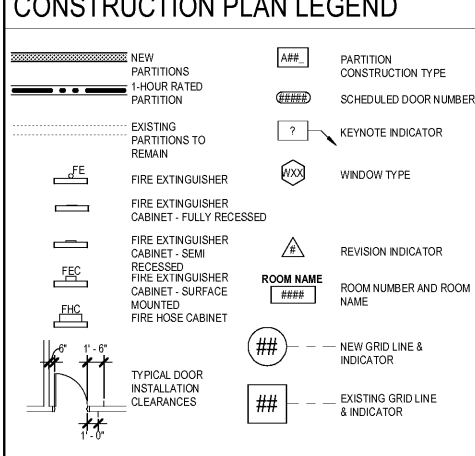

CONSTRUCTION PLAN
1/4" = 1'-0"

COLUMBUS, GA
AAA AUTO CLUB GROUP
progressive | ae

PROGRESSIVE ARCHITECTURE ENGINEERS, P.C.
330 South Tryon St., Suite 503 - Charlotte, NC 28202 - TEL: 704.751.8500 - WWW.PROGRESSIVEAE.COM

6201 Veterans Pkwy., Suite C, Columbus, GA 31909

ISSUANCE
ISSUED FOR CONSTRUCTION
2019/11/13

REVISIONS
NO. DATE DESCRIPTION

FILE NUMBER 79890016
PROJECT MANAGER JE
PROFESSIONAL GWJ
DRAWN BY ME
CHECKED BY MB

CONSTRUCTION PLAN
A-111