

Order Plans @

WWW.LDILine.com

- ### GENERAL PARTITION NOTES
1. USE PARTITION TYPE " " UNO
 2. FOR CLARITY, PARTITION TYPES DO NOT INDICATE BASE AND FLOOR FINISHES. REFER TO ROOM FINISH SCHEDULE.
 3. PROVIDE THROUGH PENETRATION FIRE STOP SYSTEM AT FIRE RATED PARTITIONS, SHAFTWALLS, AND FLOOR OPENINGS. REFER TO SHEET X-XXX
 4. FOR FIRE RESISTANT JOINT SYSTEM HEAD-OF-WALL DETAILS, REFER TO SHEET X-XXX
 5. EXTEND FIRE RATED PARTITIONS TO EXTERIOR FACE OF BUILDING WALL. FOR BRICK OR CMF WALLS, THE EXTERIOR WALL IS THE BACKSIDE OF SHEATHING
 6. CONSTRUCT FIRE RATED MASONRY PARTITIONS WITH CMU-2, TYPICAL
 7. PARTITIONS WITH TYPE INDICATORS ON BOTH SIDES OF PARTITION SHALL BE CONSTRUCTED TO SATISFY BOTH CONDITIONS INDICATED
 8. APPLY A CONTINUOUS BEAD OF ACOUSTICAL SEALANT AROUND ALL ELECTRICAL WALL BOXES
 9. FOR NON-FIRE RATED PARTITIONS, APPLY ACOUSTICAL SEALANT TO PENETRATIONS ABOVE THE CEILING IN FULL-HEIGHT PARTITIONS, UNO
 10. PROVIDE MOISTURE RESISTANT G.W.B. ON ALL TOILET, SHOWER WALLS, AND MECHANICAL ROOM WALLS, UNO
 11. INSTALL 1/2" CEMENT BACKER BOARD IN ALL SHOWERS THAT ARE TILED WITH CERAMIC TILE
 12. PROVIDE CONTROL JOINTS AT 30' MAX. PARTITIONS LOCATE SYMMETRICALLY OR EVENLY SPACED ON WALLS IF NOT SHOWN OTHERWISE. REVIEW PROPOSALS WITH ARCHITECT PRIOR TO INSTALLATION.

- ### GYPSUM BOARD APPLICATION
1. USE TYPE "R" GYP. BOARD (GGR-R) UNO.
 2. USE MOISTURE RESISTANT GYP. BOARD (GGR-M) IN TOILET ROOMS, UNO.
 3. USE TYPE "E" GYP. BOARD (GGR-E) IN CERAMIC TILED APPLICATIONS, UNO.
 4. USE TYPE "C" GYP. BOARD (GGR-C) AT SUSPENDED GYP. BOARD CEILING, UNO.
 5. USE IMPACT RESISTANT GYP. BOARD (GGR-AS) FROM FLOOR LINE TO 4'-0" AFF IN CORRIDORS AND SOLELY CLEAN WORKROOMS, UNO.






1925 Prospect Ave.
Orlando, FL 32814
P (407) 661-9100
F (407) 661-9101
www.lpi.com

Calacaci & Peterson
Architects Engineers Planners



SITE KEY:

1 (30x42) NON-RATED - PERPENDICULAR TO FLUTES
1 1/2" x 1 1/2"

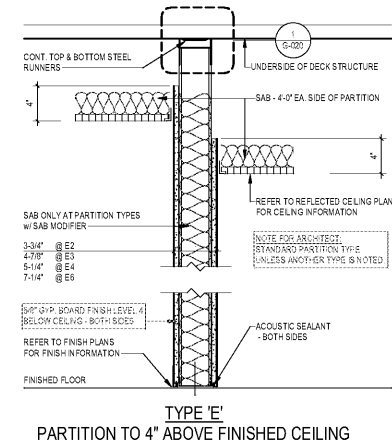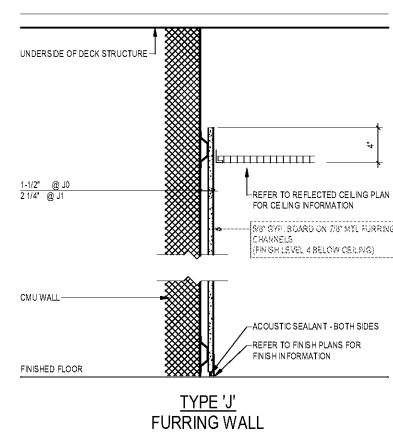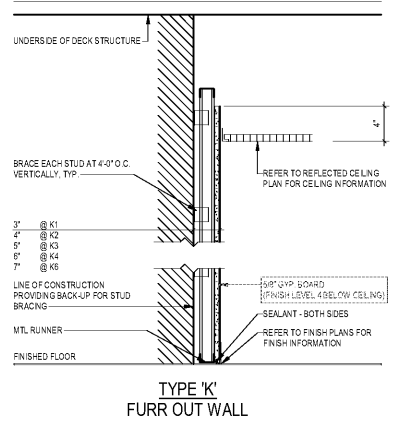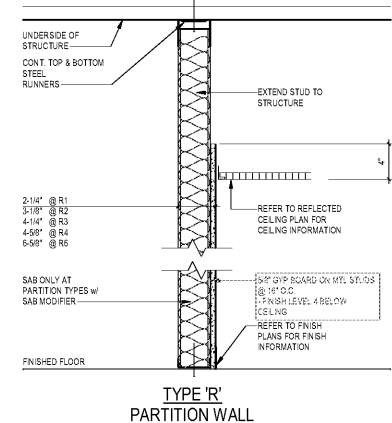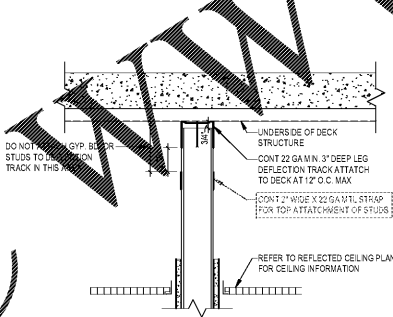

PARTITION TYPE

PARTITION STRUCTURE WIDTH AS NOTED BELOW

INSTALL SAB

NUMERIC CHARACTER	WOOD STUD SIZE	MASONRY BLOCK SIZE
0	-	-
1	3/4"	-
2	1-1/2"	-
3	-	-
4	3-1/2"	3-5/8"
6	5-1/2"	5-5/8"
8	7-1/4"	7-5/8"
10	9-1/4" (VERT.)	9-5/8"
12	-	11-5/8"

CLIENT NAME
HUTTON DEVELOPMENT
756 Cherry Street
Chattanooga, TN 37402

PROJECT NAME
ROCKLEDGE FLATS - BUILDING C
220 Barton Boulevard
Rockledge, FL 32955

SHEET TITLE
RATED ASSEMBLIES

PROJECT NO.
210002

No.	Description	Date

DATE
20/09/10

DESIGNER
AUSA

CHECKED
Chester

G-020

NOV 02, 2015

GMP PRICING SET 15 NOVEMBER 2019