


DATE	DESCRIPTION

**CITY OF MONROE
PUBLIC SAFETY & MUNICIPAL
COURT COMPLEX RENOVATION**
140 BLAINE ST. MONROE, GA 30655



THIS DRAWING IS AN INSTRUMENT OF SERVICE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT. NO PART OF THIS DOCUMENT SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM, ELECTRONICALLY OR MECHANICALLY, FOR ANY PURPOSE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF THE ARCHITECT.

**REFLECTED
CEILING PLAN**

PROJECT # 19160MONRpo
DATE: Issue Date
DRAWN BY: Author
CHECKED BY: Checker

A200
SCALE: As indicated

- CEILING GENERAL NOTES**
- CENTER FIRE SPRINKLER HEADS ON TILE (TYP.). COORDINATE ENTIRE FIRE SPRINKLER LAYOUT WITH ARCHITECT.
 - CONTRACTOR TO SCHEDULE CEILING CAVITY COORDINATION MEETING WITH ALL SUBCONTRACTORS AND ARCHITECT PRIOR TO INSTALLING ANY COMPONENTS.
 - CENTER LIGHT FIXTURES WITHIN CEILING TILES AND GYPSUM BOARD SOFFITS IN BOTH DIRECTIONS, UNLESS NOTED OTHERWISE.
 - MECHANICAL CEILING MOUNTED EQUIPMENT (DIFFUSERS, RETURN GRILLES, ETC.) TO BE CENTERED IN CEILING AREAS WHEREVER POSSIBLE.
 - REFER TO ELECTRICAL FOR AUDIO/VISUAL ROUGH-IN TO BE INSTALLED BY G.C.
 - PROVIDE AND INSTALL ACCESS PANELS ON GYPSUM BOARD CEILINGS TO AS NEEDED TO ACCESS MECHANICAL CEILING EQUIPMENT. G.C. TO REVIEW LOCATIONS WITH ARCHITECT PRIOR TO INSTALLATION. ACCESS PANELS SHALL BE PROTECTED AS APPROPRIATE FOR THE FIRE RESISTANCE RATING OF THE BARRIER.
 - VERIFY NEW CEILING HEIGHTS ALLOW FOR ADEQUATE SPACE TO ACCOMMODATE STRUCTURAL MEMBERS, MECHANICAL DUCTWORK, ELECTRICAL FIXTURES, ETC. PRIOR TO INSTALLATION OF NEW CEILINGS. NOTIFY ARCHITECT IMMEDIATELY IF FIELD CONDITIONS DIFFER FROM DRAWINGS. DO NOT PROCEED UNTIL RECEIVING CLARIFICATION FROM ARCHITECT.
 - EXTERIOR FIXTURES AND INSTALLATION SHALL BE WAIRTIGHT.
 - EMERGENCY LIGHT FIXTURES SHALL BE PROVIDED AS REQUIRED BY CODE.
 - PROVIDE ACCESS DOORS AT ALL LOCATIONS INDICATED OR REQUIRED FOR ACCESS TO EQUIPMENT, VALVES, JUNCTION BOXES, ETC.
 - PROVIDE CORNER BEADS, J BEADS AND OTHER GYPSUM BOARD ACCESSORIES AT ALL EXPOSED CORNERS, UNLESS NOTED OTHERWISE.
 - REFER TO ELECTRICAL FOR LIGHT FIXTURE TYPES.
 - COORDINATE LOCATIONS OF AIR HANDLING UNITS WITH CONSTRUCTION. TYPICAL THROUGHOUT.


CEILING TYPES

	A1	STANDARD ACOUSTICAL TILE
	A2	MOISTURE RESISTANT ACT
	B1	GYP BOARD
	B2	MOISTURE RESISTANT GYP BOARD
	C	IMPACT RESISTANT GYP BOARD
	D1	EXPOSED PAINTED - PNT-5
	D2	EXPOSED AS-IS

CEILING LEGEND

	CEILING TYPE
	CEILING HEIGHT ABOVE FINISH FLOOR
	PENDANT DOWNLIGHT CYLINDER
	SUPPLY
	RETURN
	SUSPENDED LINEAR LIGHT FIXTURE
	LINEAR RECESSED/SURFACE MOUNTED LIGHT FIXTURE
	2' x 4' RECESSED/SUSPENDED LIGHT FIXTURE
	ILLUMINATED EXIT SIGN (BLACK AREA REPRESENTS DIRECTION OF ILLUMINATED LETTERING) CEILING MOUNTED
	ILLUMINATED EXIT SIGN (BLACK AREA REPRESENTS DIRECTION OF ILLUMINATED LETTERING) WALL MOUNTED

NOTE: SEE ELECTRICAL DRAWINGS FOR LIGHT FIXTURE TYPE AND MOUNTING HEIGHTS FOR SUSPENDED FIXTURES.

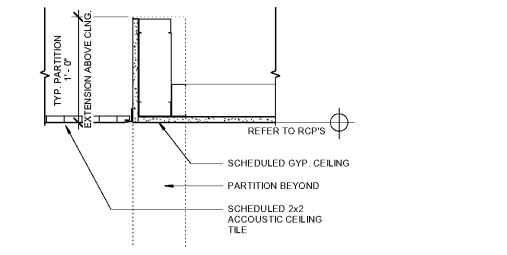

2 CEILING TRANSITION DETAIL
A200 1 1/2" = 1'-0"

1 REFLECTED CEILING PLAN
A200 1/8" = 1'-0"

