

- NOTES:
1. STORM DRAIN INLET PROTECTION MEASURES SHALL PREVENT SOIL AND DEBRIS FROM ENTERING STORM DRAIN INLETS.
 2. TEMPORARY CONTROLS SHALL BE CONSTRUCTED BEFORE THE SURROUNDING AREA IS DISTURBED.
 3. TO PREVENT CLOGGING, STORM DRAIN CONTROL STRUCTURES MUST BE MAINTAINED FREQUENTLY.
 4. CHECK ALL TEMPORARY CONTROL MEASURES DAILY, AND AFTER EACH STORM EVENT.
 5. CONTROL MEASURES MUST BE BUILT PER DETAIL AND PLANS, AND MUST BE IN GOOD WORKING CONDITION AT ALL TIMES.

IP INLET PROTECTION

- NOTES:
1. CONTRACTOR SHALL PROVIDE DESIGNATED LOCATION FOR SORTING AND SEPARATING HAZARDOUS WASTES.
 2. HAZARDOUS WASTE STORAGE MUST BE PROTECTED FROM WEATHER ELEMENTS AND HAVE RESTRICTED ACCESS.
 3. HAZARDOUS WASTE STORAGE MUST COMPLY WITH LOCAL, STATE, AND FEDERAL REGULATIONS.
 4. HAZARDOUS WASTE STORAGE MUST COMPLY WITH CONTRACT DOCUMENTS.

HWD HAZARDOUS WASTE DISPOSAL

SOURCE BOX
 LAST REVISED: WAL-MART STANDARD
 JUNE 2013 DETAIL

- NOTES:
1. ALL PERSONNEL INVOLVED WITH CONSTRUCTION ACTIVITIES MUST COMPLY WITH STATE AND LOCAL SANITARY OR SEPTIC SYSTEM REGULATIONS. PORTABLE TOILETS MUST BE LOCATED AT LEAST 30 FEET FROM INLETS, CHANNELS, SWALES, OR PERMITTED LIMITS OF DISTURBANCE, AND MUST BE LOCATED AT LEAST 50 FEET FROM WATERS OF THE STATE, OR WATERS OF THE U.S. PORTABLE TOILETS MUST BE SECURELY ANCHORED AND/OR TIED DOWN. SECONDARY CONTAINMENT SHALL BE PROVIDED AND FULL CAPACITY SHALL BE RESTORED IMMEDIATELY UPON DISCOVERY OF ITS DIMINISHMENT. THE LOCATION OF SANITARY FACILITIES SHALL BE SHOWN ON THE SITE MAPS.

SAF SANITARY FACILITIES

- NOTES:
1. SUBSTANCES THAT HAVE THE POTENTIAL FOR POLLUTING SURFACE AND/OR GROUNDWATER MUST BE CONTROLLED BY ANY MEANS NECESSARY TO ENSURE THAT THOSE DO NOT DISCHARGE FROM THE SITE. IN THIS REGARD, POTENTIALLY POLLUTING SUBSTANCES SHALL BE STORED AND HANDLED IN A MANNER CONSISTENT WITH THE RISK OF IMPACT THOSE REPRESENT, AND ACCORDING WITH THE REGULATIONS.
 2. NO SOLID MATERIALS, INCLUDING BUILDING MATERIALS, ARE ALLOWED TO BE DISCHARGED FROM THE SITE WITH STORMWATER. ALL SOLID WASTE, INCLUDING DISPOSABLE MATERIALS INCIDENTAL TO THE CONSTRUCTION ACTIVITIES, MUST BE COLLECTED AND PLACED IN CONTAINERS RUBBISH, TRASH, GARBAGE, LITTER, OR OTHER SUCH MATERIALS SHALL BE DEPOSITED INTO SEALED CONTAINERS. MATERIALS SHALL BE PREVENTED FROM LEAVING THE PREMISES THROUGH THE ACTION OF WIND OR STORMWATER DISCHARGE INTO DRAINAGE DITCHES OR WATERS OF THE STATE. THE CONTAINERS SHALL BE Hauled AWAY FROM THE SITE AND EMPTIED WHEN THOSE BECOME 3/4 FULL, OR AS NECESSARY, BY A CERTIFIED TRASH DISPOSAL SERVICE. LIDS OR COVERS FOR THE CONTAINERS SHALL BE PROVIDED FOR USE DURING RAIN EVENTS TO PREVENT WASTE CONTACT WITH STORMWATER. WASTES THAT CANNOT BE STORED IN A CONTAINER MUST BE STORED UNDER COVER OR INDOORS. THE LOCATION OF SOLID WASTE RECEPTACLES SHALL BE SHOWN ON THE SITE MAPS.

SWD SOLID WASTE DISPOSAL

- NOTES:
1. MATERIAL STORAGE AREAS SHALL BE LOCATED, WHEN POSSIBLE, TO MINIMIZE EXPOSURE TO WEATHER. INSPECTIONS SHALL EVALUATE DISTURBED AREAS AND AREAS USED FOR STORING MATERIALS THAT ARE EXPOSED TO RAINFALL FOR EVIDENCE OF OR THE POTENTIAL FOR POLLUTANTS ENTERING THE DRAINAGE SYSTEM OR DISCHARGING FROM THE SITE. IF NECESSARY, THE MATERIALS MUST BE COVERED OR ORIGINAL COVERS MUST BE REPAIRED OR SUPPLEMENTED. ALSO, PROTECTIVE BERMS MUST BE CONSTRUCTED, IF NEEDED, TO CONTAIN RUNOFF FROM MATERIAL STORAGE AREAS. GC SHALL ADHERE TO ALL STATE AND LOCAL REGULATIONS PERTAINING TO MATERIAL STORAGE AREAS.
 2. CHEMICALS, PAINTS, SOLVENTS, FERTILIZERS, AND OTHER TOXIC MATERIALS MUST BE STORED IN WATERPROOF CONTAINERS. EXCEPT DURING RAIN EVENTS, THE CONTAINERS AND THE CONTENTS MUST BE KEPT IN TRUCKS OR INSIDE OF STORAGE FACILITIES. RUNOFF CONTAINING SUCH MATERIAL MUST BE COLLECTED, REMOVED FROM THE SITE, TREATED, AND DISPOSED AT AN APPROVED SOLID WASTE AND CHEMICAL DISPOSAL FACILITY.

MLSA MATERIAL LAYDOWN AND STORAGE AREA

SOURCE BOX
 LAST REVISED: WAL-MART STANDARD
 JUNE 2013 DETAIL

- NOTES:
1. PROVIDE WASH STATION IN A LOCATION PROTECTED FROM WEATHER ELEMENTS.
 2. COLLECT ALL USED WASH WATER AND DISPOSE OF IT PROPERLY.
 3. PROVIDE ADEQUATE SUPPLY OF WATER AND ANY OTHER SUPPLIES TO ENSURE PROPER OPERATION OF WASH STATION WHEN NEEDED.

PSW PAINT AND STUCCO WASHOUT

- NOTES:
1. THE GC SHALL DESIGNATE AREAS ON THE SITE MAPS FOR EQUIPMENT CLEANING, MAINTENANCE, AND REPAIR. THE GC AND SUBCONTRACTORS SHALL UTILIZE SUCH DESIGNATED AREAS. CLEANING, MAINTENANCE, AND REPAIR AREAS SHALL BE PROTECTED BY A TEMPORARY PERIMETER BERM, SHALL NOT OCCUR WITHIN 150 FEET OF ANY WATERWAY, WATER BODY OR WETLAND, AND SHALL OCCUR IN AREAS LOCATED AS FAR AS PRACTICAL FROM STORM SEWER INLETS. ERIP PAINTS SHALL BE USED THROUGHOUT MAINTENANCE ACTIVITIES AND RESULANT WASTES SHALL BE DISPOSED OF IN ACCORDANCE WITH THE HAZARDOUS WASTE MANAGEMENT AND SPILL REPORTING PLAN NOTICES INCLUDED ON THIS PLAN SHEET.
 2. USE OF DETERGENTS FOR LARGE SCALE WASHING IS PROHIBITED (FOR EXAMPLE, WASHING TRUCKS, BUSES, TRAILERS, PAVING MACHINES, ETC.). ALL WASH WATER SHALL BE DETAINED AND PROPERLY TREATED OR DISPOSED.

EMA EQUIPMENT AND VEHICLE CLEANING AND MAINTENANCE AREAS

SOURCE BOX
 LAST REVISED: WAL-MART STANDARD
 JUNE 2013 DETAIL

- NOTES:
1. CONCRETE WASTE MANAGEMENT PERTAINS TO WASTE FROM CONCRETE READY-MIX TRUCKS, MASONRY OPERATIONS, AND SIMILAR WASTE.
 2. DISCHARGE OF EXCESS OR WASTE CONCRETE AND/OR WASH WATER FROM CONCRETE TRUCKS IS ALLOWED AT THE CONSTRUCTION SITE, ONLY COMMERCIALY AVAILABLE ABOVE GROUND PORTABLE CONCRETE WASHOUT CONTAINERS ARE ALLOWED AND MUST BE PROTECTED FROM VEHICLE TRAFFIC AND CLEARLY IDENTIFIED BY LEGIBLE SIGNAGE, AND MUST BE LOCATED OUTSIDE OF VEGETATED BUFFERS AND AS FAR AS PRACTICAL FROM STORMWATER CONVEYANCES AND IMPOUNDMENTS AND WATER BODIES. PORTABLE CONCRETE WASHOUT CONTAINERS SHALL CONTAIN AND/OR ACTIVELY MANAGE BOTH SOLID AND FLUID COMPONENTS OF THE MIX. CONCRETE WASHOUT CONTAINERS MUST BE CLEANED OR EXCHANGED WHEN THE REMAINING VOLUME IS REDUCED BY 85% TO PREVENT ANY POTENTIAL OVERFLOW IN A STORM EVENT.
 3. ALTERNATIVELY, WASTE CONCRETE CAN BE PLACED INTO FORMS TO MAKE RIP RAP AND/OR OTHER USEFUL CONCRETE PRODUCTS. PORTABLE CONCRETE WASHOUT CONTAINERS SHALL BE DISPOSED OF IN ACCORDANCE WITH APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS. THE GC IS RESPONSIBLE FOR ASSURING THAT THESE PROCEDURES, APPLICABLE LAWS, AND ENVIRONMENTAL REGULATIONS ARE FOLLOWED. THE LOCATION OF CONCRETE WASHOUT CONTAINERS SHALL BE SHOWN ON THE SITE MAPS.

CW CEMENT AND CONCRETE WASHOUT

- NOTES:
1. PERMANENT STABILIZATION SHALL BE ACCOMPLISHED IN ALL DISTURBED AREAS BY COVERING THE SOIL WITH PAVEMENT, BUILDING STRUCTURES, VEGETATION, OR OTHER FORMS OF SOIL STABILIZATION.
 2. THE GC IS REQUIRED TO INITIATE PERMANENT SOIL STABILIZATION MEASURES IMMEDIATELY UPON REACHING FINAL GRADE. FOR THOSE AREAS NOT AT FINAL GRADE THAT WILL NOT BE DISTURBED FOR GREATER THAN 14 DAYS, THE CONTRACTOR SHALL INITIATE TEMPORARY STABILIZATION PER THE TEMPORARY SEEDING OR STABILIZATION DETAIL.
 3. THE GC HAS 14 DAYS FROM INITIATION OF STABILIZATION TO COMPLETE SOIL PREPARATION, SEEDING, MULCHING, AND ANY OTHER REQUIRED ACTIVITIES RELATED TO THE PLANTING AND ESTABLISHMENT OF VEGETATION. THE GC ALSO HAS 14 DAYS FROM INITIATION OF STABILIZATION TO COMPLETELY INSTALL NON-VEGETATED MEASURES, IF UTILIZED.
 4. SOILS MUST BE PREPARED BEFORE INSTALLATION OF SOG OR SEED. SEE 02900 SPECIFICATION FOR INSTRUCTION ON PROPER SOIL PREPARATION.
 5. AT THE COMPLETION OF GROUND-DISTURBING ACTIVITIES, THE ENTIRE SITE MUST HAVE PERMANENT VEGETATIVE COVER MEETING VEGETATIVE DENSITY REQUIREMENTS IN THE GENERAL PERMIT, OR MULCH PER LANDSCAPE PLAN, IN ALL AREAS NOT COVERED BY HARDSCAPE (STONE, PAVEMENT, BUILDINGS, ETC.).
 6. SEEDING AREAS SHALL BE PROTECTED WITH STRAW MULCH, HYDRAULIC MULCH OR A ROLLED EROSION CONTROL PRODUCT. STRAW MULCH MUST BE TACKLED OR COMBED BY DISC OR OTHER MACHINERY, AND ROLLED EROSION CONTROL PRODUCTS MUST BE INSTALLED PER MANUFACTURER RECOMMENDATIONS. ONLY ROLLED EROSION CONTROL PRODUCTS ARE PERMITTED TO BE USED IN FLOW CONVEYANCES.
 7. ALL AREAS TO BE SEEDING MUST MEET TOPSOIL DEPTH, PH AND ORGANIC CONTENT REQUIREMENTS AS SPECIFIED IN THE 02900 SPECIFICATION - PLANTING OR XERISCAPE SPECIFICATION.
 8. FINAL SITE STABILIZATION IS ACHIEVED WHEN PERENNIAL VEGETATIVE COVER PROVIDES PERMANENT STABILIZATION WITH A UNIFORM DENSITY GREATER THAN 70 PERCENT OVER THE ENTIRE AREA TO BE STABILIZED BY VEGETATIVE COVER. THIS AREA IS EXCLUSIVE OF AREAS THAT ARE COVERED WITH ROCK (CRUSHED GRANITE, GRAVEL, ETC.) OR LANDSCAPE MULCH. PAVED OR HAVE A BUILDING OR OTHER PERMANENT STRUCTURE ON THEM.

PS PERMANENT SEEDING, SOD OR MULCHING

SOURCE BOX
 LAST REVISED: WAL-MART STANDARD
 JUNE 2012 DETAIL


- NOTES:
1. THE GC IS REQUIRED TO, AT A MINIMUM, INITIATE SOIL STABILIZATION MEASURES IMMEDIATELY WHENEVER ANY CLEARING, GRADING, EXCAVATING OR OTHER EARTH DISTURBING ACTIVITIES HAVE PERMANENTLY CEASED ON ANY PORTION OF THE SITE, OR TEMPORARILY CEASED ON ANY PORTION OF THE SITE AND WILL NOT LIKELY RESUME FOR A PERIOD EXCEEDING 14 CALENDAR DAYS.
 2. THE GC HAS 7 DAYS FROM INITIATION OF STABILIZATION TO COMPLETE SOIL PREPARATION, SEEDING, MULCHING, AND ANY OTHER REQUIRED ACTIVITIES RELATED TO THE PLANTING AND ESTABLISHMENT OF VEGETATION. THE GC ALSO HAS 7 DAYS FROM INITIATION OF STABILIZATION TO COMPLETELY INSTALL NON-VEGETATED MEASURES, IF UTILIZED.
 3. ALL DISTURBED AREAS MUST BE STABILIZED TEMPORARILY WITH THE USE OF FAST-GERMINATING ANNUAL GRASS/GRASS MIXTURES APPROPRIATE FOR SITE SOIL AND CLIMATE CONDITIONS. MULCH IS REQUIRED FOR ALL SEEDING APPLICATIONS, AND ALL MULCH APPLICATIONS MUST INCLUDE A SUITABLE FORM OF MULCH ANCHORING TO MAXIMIZE MOVEMENT OF MULCH BY WIND OR WATER.
 4. ALTERNATIVE STABILIZATION MEASURES TO SEEDING, SUCH AS ANCHORED MULCH APPLICATION (WITHOUT SEEDING), MAY BE UTILIZED DURING PERIODS WHEN VEGETATIVE GROWTH IS UNLIKELY (E.G. WINTER MONTHS).
 5. IT IS NOT ACCEPTABLE TO ALLOW BARE SOIL TO REMAIN EXPOSED AT ANY TIME DURING THE YEAR, REGARDLESS OF WEATHER/TEMPERATURE/SITE CONDITIONS.
 6. ALTERNATIVE STABILIZATION MEASURES INCLUDE, BUT ARE NOT LIMITED TO: ANCHORED STRAW/HAY MULCH, WOOD CELLULOSE FIBER MULCH, SPRAY-ON SOIL GLUES/BINDERS, AND ROLLED EROSION CONTROL PRODUCTS.
 7. ALL ROLLED EROSION CONTROL PRODUCTS SHALL HAVE CURRENT QDOR(TM) STATUS ISSUED BY THE EROSION CONTROL TECHNOLOGY COUNCIL (ECTC) PLUS ANY STATE OR AGENCY-SPECIFIC REQUIREMENTS. EVIDENCE OF QDOR(TM) APPROVAL SHALL ACCOMPANY THE PRODUCT SHIPPED TO THE JOBSITE FOR READY IDENTIFICATION BY THE CONTRACTOR OR AGENCY INSPECTOR.
 8. ROLLED EROSION CONTROL PRODUCTS (NETS, BLANKETS, TURF REINFORCED MATS) AND VEGETATED AREAS NOT MEETING REQUIRED VEGETATIVE DENSITIES FOR FINAL STABILIZATION MUST BE INSPECTED DAILY, RIND, RUTTING AND OTHER SIGNS OF EROSION INDICATE THE SPECIFIED EROSION CONTROL DEVICE IS NOT FUNCTIONING OR INSTALLED PROPERLY AND/OR ADDITIONAL EROSION CONTROL DEVICES ARE WARRANTED.

TS TEMPORARY SEEDING OR STABILIZATION

SOURCE BOX
 LAST REVISED: WAL-MART STANDARD
 JUNE 2012 DETAIL


- NOTES:
1. CONSIDERATION MUST BE GIVEN TO ANTICIPATED CLIMATE AND SEASONAL CONDITIONS WHEN PLANTING SEED.
 2. SEED SHALL BE FREE OF WEEDY SPECIES AND APPROPRIATE FOR SITE SOILS AND REGIONAL CLIMATE. SEED AND MULCH PER THE CONSTRUCTION DRAWINGS AND THE 02900 PLANTING SPECIFICATION IMMEDIATELY AFTER TOPSOIL IS APPLIED AND FINAL GRADE IS REACHED.
 3. THE SITE HAS ACHIEVED FINAL STABILIZATION ONCE ALL AREAS ARE COVERED WITH BUILDING FOUNDATION OR PAVEMENT, OTHER LANDSCAPING COVER (STONE, MULCH, ETC.), OR HAVE A STAND OF GRASS WITH A MINIMUM OF 70 PERCENT (MODIFY, AS NECESSARY TO MATCH GENERAL PERMIT) DENSITY OVER THE ENTIRE VEGETATED AREA, OR GREATER IN ACCORDANCE WITH THE GENERAL PERMIT REQUIREMENTS.
 4. VEGETATED AREAS MUST BE WATERED, FERTILIZED, AND RESEED AS NEEDED TO ACHIEVE THIS REQUIREMENT. THE VEGETATIVE DENSITY MUST BE MAINTAINED THROUGH PROJECT COMPLETION TO BE CONSIDERED STABILIZED. AREAS PROTECTED BY EROSION CONTROL BLANKETS ARE NOT PERMANENTLY STABILIZED UNTIL THE APPLICABLE GENERAL PERMIT REQUIREMENT FOR FINAL VEGETATIVE DENSITY IS ACHIEVED.
 6. RIP-RAP, MULCH, GRAVEL, DECOMPOSED GRANITE OR OTHER EQUIVALENT PERMANENT STABILIZATION MEASURES MAY BE EMPLOYED IN LIEU OF VEGETATION BASED ON SITE-SPECIFIC ENGINEERING AND GOVERNING AUTHORITY APPROVAL.
 7. ALL SEED AREAS SHALL BE INSPECTED REGULARLY TO CONFIRM THE HEALTHY STAND OF GRASS IS MAINTAINED.

SVR SEEDING/VEGETATION REQUIREMENTS

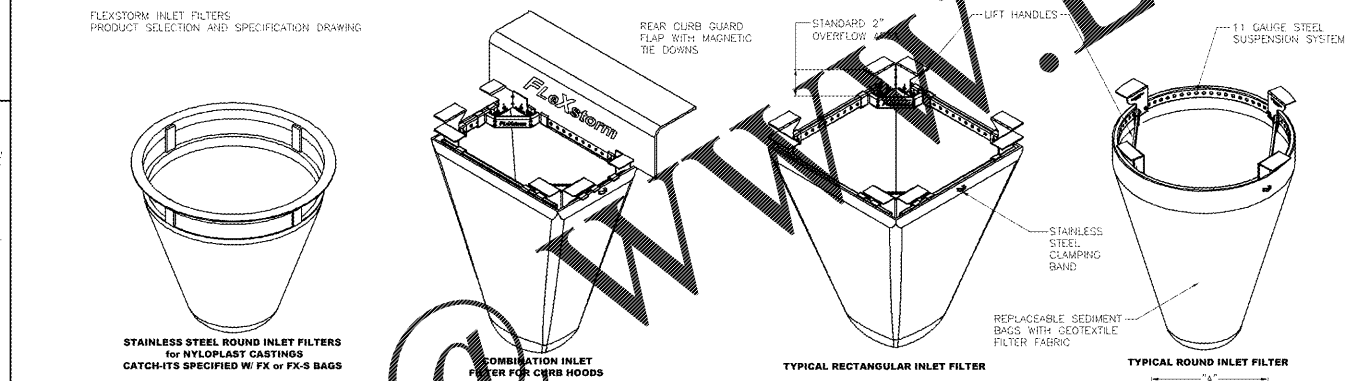

1. IDENTIFY YOUR FRAME STYLE, SIZE, AND MATERIAL

STYLE	FRAME STYLE AND SIZE	FRAME P.
ROUND	SMALL ROUND (UP TO 20" DIA GRATES (A) DIA)	621R
	MED ROUND (UP TO 20 1/2" DIA GRATES (A) TO 24" DIA OPENINGS (B))	621RD
	LARGE ROUND (UP TO 26 1/2" DIA GRATES (A) TO 32" DIA OPENINGS (B))	621LRD
	XL ROUND (UP TO 32 1/2" DIA GRATES (A) TO 36" DIA OPENINGS (B))	621XLRD
RECT. / SQUARE	SMALL RECT / SQUARE (UP TO 24" X 24" DIA OPENINGS OR 36" PERIMETER)	622SQR
	MED RECT / SQUARE (UP TO 30" X 30" DIA OPENINGS OR 42" PERIMETER)	622MSQ
	LARGE RECT / SQUARE (UP TO 36" X 36" DIA OPENINGS OR 48" PERIMETER)	622LSQ
	XL RECT / SQUARE (UP TO 42" X 42" DIA OPENINGS OR 54" PERIMETER)	622XLSQ
WALL MOUNT	SMALL WALL MOUNT (UP TO 24" X 24" DIA OPENINGS OR 36" PERIMETER)	623SMB
	MED WALL MOUNT (UP TO 30" X 30" DIA OPENINGS OR 42" PERIMETER)	623MSB
	LARGE WALL MOUNT (UP TO 36" X 36" DIA OPENINGS OR 48" PERIMETER)	623LSB
	XL WALL MOUNT (UP TO 42" X 42" DIA OPENINGS OR 54" PERIMETER)	623XLSB
	12" DIAMETER NYLOPLAST CASTINGS (STAINLESS STEEL FRAMING STANDARD)	6212NY
	15" DIAMETER NYLOPLAST CASTINGS (STAINLESS STEEL FRAMING STANDARD)	6215NY
	18" DIAMETER NYLOPLAST CASTINGS (STAINLESS STEEL FRAMING STANDARD)	6218NY
	24" DIAMETER NYLOPLAST CASTINGS (STAINLESS STEEL FRAMING STANDARD)	6224NY
	30" DIAMETER NYLOPLAST CASTINGS (STAINLESS STEEL FRAMING STANDARD)	6230NY
	OPEN THROAT GUTTERS - CURB OPENING SIZE	
	UP TO 4" 11 FILTER AND MOUNTING HARDWARE	624M1
	BETWEEN 4" AND 8" 12 FILTERS AND MOUNTING HARDWARE	624M2
	BETWEEN 8" AND 12" 13 FILTERS AND MOUNTING HARDWARE	624M3
	BETWEEN 12" AND 16" 14 FILTERS AND MOUNTING HARDWARE	624M4
	UPGRADED FRAMING MATERIAL OPTIONS (STANDARD IS ZINC PLATED)	SUFFIX
	CHROME PLATED FRAMING FOR HIGH SALT EXPOSURE	-CHR
	STAINLESS STEEL FRAMING FOR HIGH SALT AND / OR CHEMICAL EXPOSURE	-SS

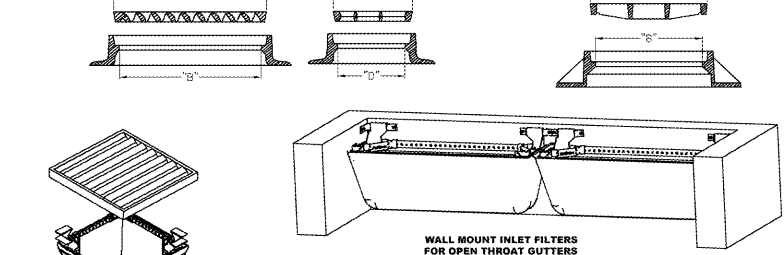

SPECIFICATIONS FOR STANDARD BAGS BY NOMINAL SIZE

NOMINAL BAG SIZE	SOLIDS STORAGE (CU FT)	FX (WOVEN)	PC (POST CONSTR)	IL (WGN WOVEN)	PC OIL RETENT (OZ)	**PCP OIL RETENT (OZ)
SMALL	1.6	1.2	0.8	0.9	66	155
MEDIUM	2.1	1.8	1.2	1.3	96	185
LARGE	3.8	2.2	1.5	1.6	120	209
XL	4.2	3.6	2.4	2.6	142	370

*PC FILTER BAG AT 50% MAX ABSORPTION CAPACITY
 **PC FILTER BAG AT 50% CAPACITY AND NYLON SKIMMER AT 10% CAPACITY

- INSTALLATION:
1. REMOVE GRATE
 2. DROP FLEXSTORM INLET FILTER ONTO LOAD BEARING LIP OF CASTING OR CONCRETE STRUCTURE
 3. REPLACE GRATE

3. CREATE YOUR FLEXSTORM INLET FILTER PART NUMBER

FRAME P/N FROM STEP 1	FILTER BAG P/N FROM STEP 2	FRAMING MATERIAL

ALL PRODUCTS MANUFACTURED BY INLET & PIPE PROTECTION, INC. DISTRIBUTED BY ADS
 WWW.INLETFILTERS.COM
 (866) 287-8665 PH
 (630) 355-3477 FX
 INFO@INLETFILTERS.COM

NOTICE TO CONTRACTOR

WHERE FILTER BAGS ARE SPECIFIED, THE CONTRACTOR SHALL USE FLEXSTORM INLET FILTERS BY NYLOPLAST FOR INLET PROTECTION. SINCE THE INLET FILTERS ARE CUSTOMIZED FOR EACH INLET, THE DETAIL PROVIDED SHALL BE USED FOR GENERAL INFORMATION ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ORDER THE APPROPRIATE FLEXSTORM INLET FILTER FOR EACH EXISTING, OR PROPOSED, INLET TYPE REQUIRING PROTECTION. THE CONTRACTOR SHALL CONTACT GARVIN COX OR THE LOCAL NYLOPLAST SALES REPRESENTATIVE FOR ORDERING INFORMATION. AT A MINIMUM THE CONTRACTOR SHALL BE PREPARED TO PROVIDE THE NYLOPLAST SALES REPRESENTATIVE INFORMATION RELATED TO INLET TYPE AND DIMENSIONS FOR EACH INLET REQUIRING PROTECTION.

Nyloplast
 A division of ADS
 GARVIN COX
 303 W.M. BAUGH LANE
 BROWNSWOOD, TX 76801
 CELL: (915) 308-8259
 FAX: (866) 843-1147
 garvin.cox@ads-nypipe.com

DEVELOPER/OWNER
 SAM'S REAL ESTATE BUSINESS TRUST
 MAIL STOP 0505
 702 SW 8TH STREET
 BENTONVILLE, AR 72716-0505
 (479) 204-3314
 EMAIL: MARK.GOLDSMITH@WALMART.COM
 SITE OPERATOR/GENERAL CONTRACTOR:

 SUPERINTENDENT:

IMPORTANT: GC MUST SIGN ALL SHEETS AND ANY NEW PLAN SHEETS ISSUED BY THE CEC.

SOURCE BOX
 LAST REVISED: MANUFACTURER
 APRIL 22, 2013 DETAIL

IP5 FILTER BAG

REVISIONS	BY

CARLSON CONSULTING ENGINEERS, INC.
 7088 LEDGESTONE COMMONS
 BARTLETT, TENNESSEE 38133
 PH: (901) 381-0404 • FX: (901) 384-0710
 NORTH CAROLINA CORPORATION # C-3504



SAM'S CLUB #6540-209
 CHARLOTTE, NORTH CAROLINA
 SAM'S REAL ESTATE BUSINESS TRUST
 2101 SE SIMPLE SAVINGS DRIVE
 BENTONVILLE, AR 72716



DRAWN TGH
 CHECKED BKM
 DATE 12/17/2019
 SCALE NTS
 JOB No. 6540-209
 SHEET 6 OF 21