


Order Plans @ www.LDILine.com

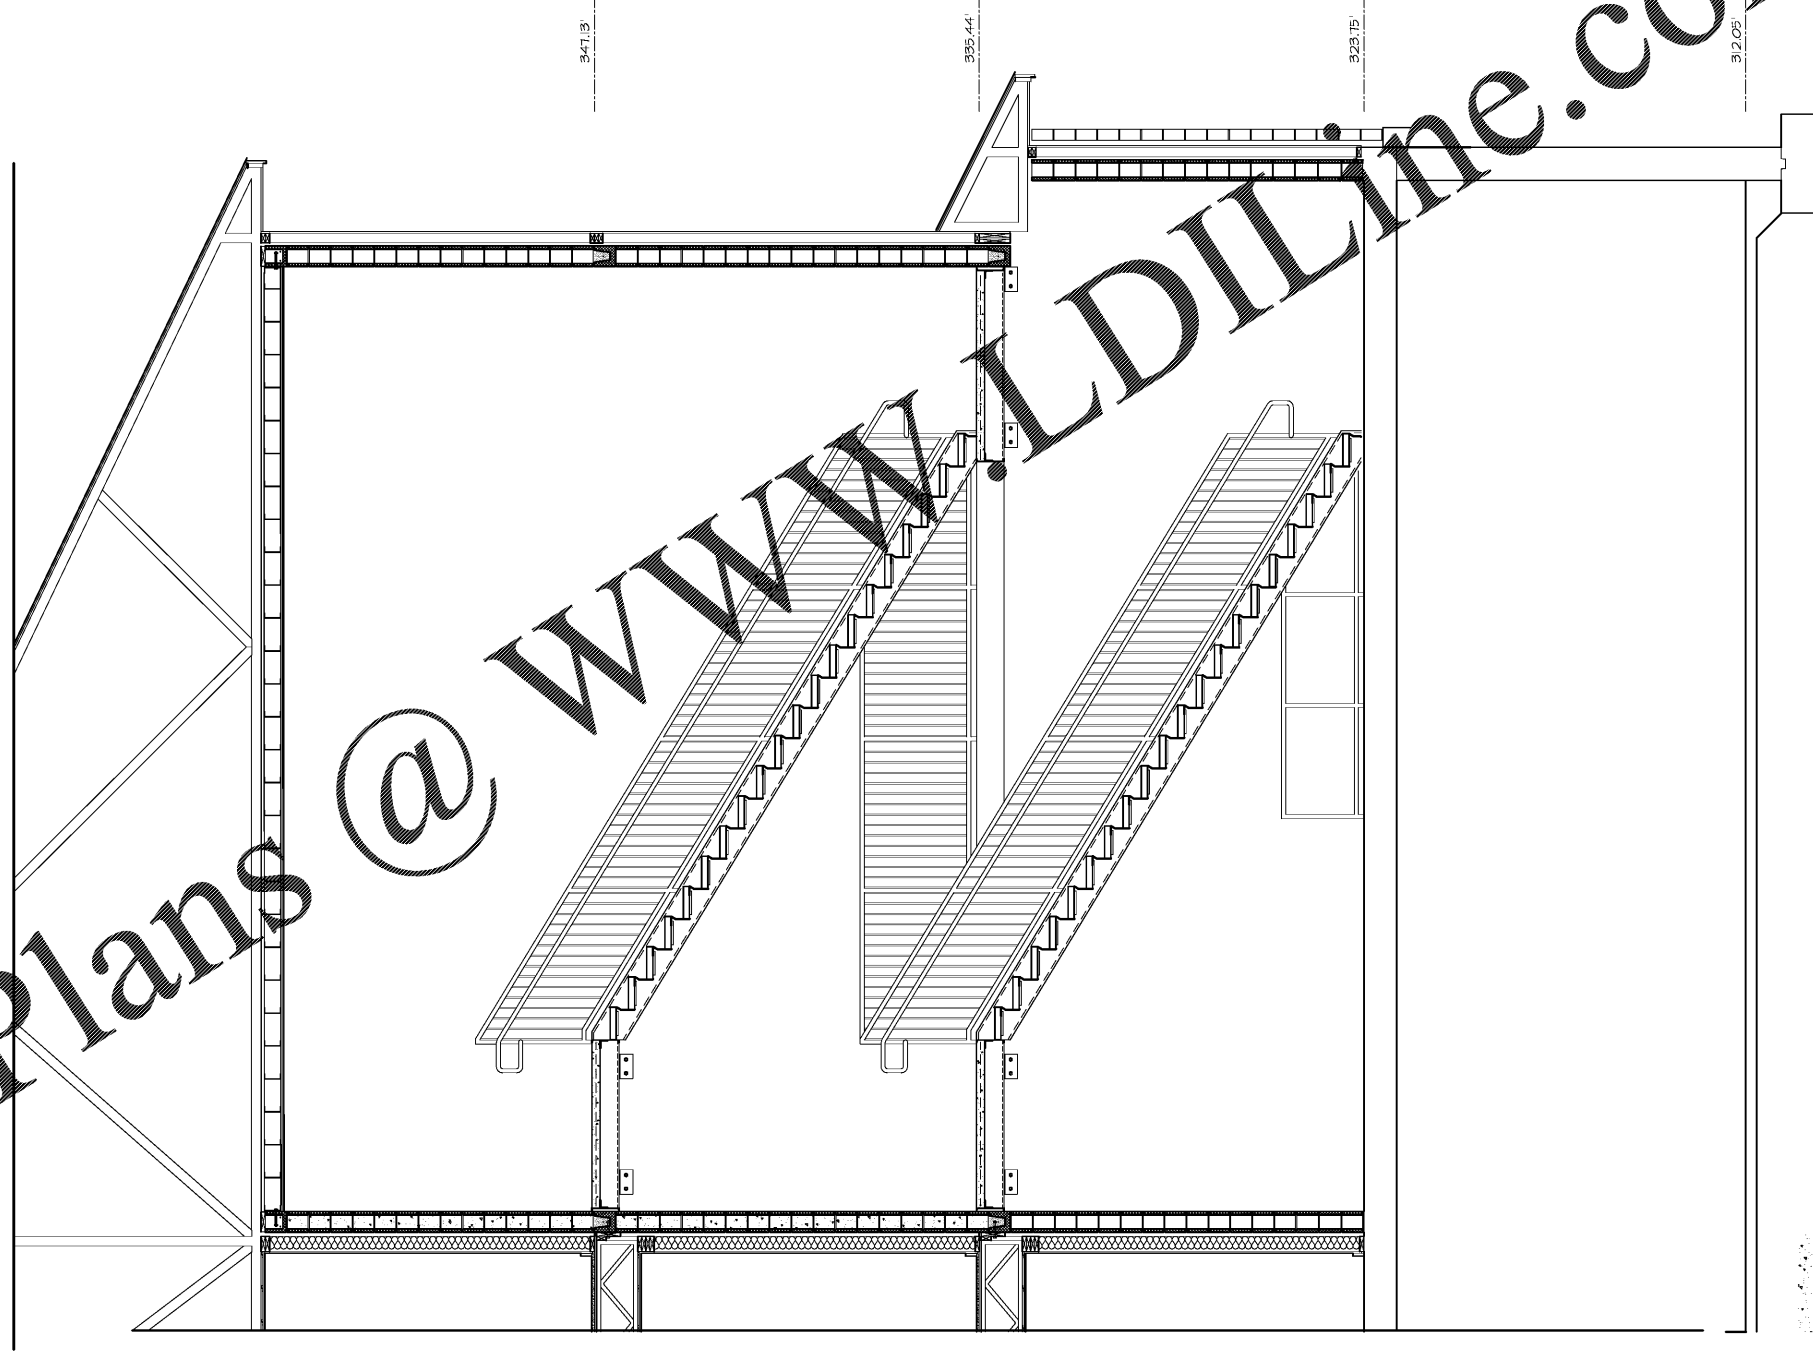

FLOOR AS SCHED. ON 1" GYP-CRETE ON 2" G/L. SUBFLOOR SIZED TO 15" DEEP (CORRIDORS ONLY) PRE-FAB WOOD TRUSSES @ 24" O.C. MAX.

CORRIDOR IS A 1-HR RATED BEARING WALL WITH 1/2" GYP-CRETE ON 1" GYP-CRETE ON 2" G/L. CORRIDOR IS 15" DEEP (CORRIDORS ONLY) PRE-FAB WOOD TRUSSES @ 24" O.C. MAX. SEE STRUCTURAL.

6" CMU WALL WITH HORIZONTAL AND VERTICAL JOINT REINFORCEMENT. FILL EMPTY CELLS WITH CORE FILL 300 INSULATION.

2x6 NO. STUD WITH ONE LAYER OF 5/8" TYPE 'X' GAB. FINISH AS SCHEDULED. 1/2" UNFACED BATT INSULATION.

1 STAIR #3 - LONGITUDINAL SECTION
A6.04

3/8" = 1'-0"

CRABTREE NORTH APTS.
2251 Charles Drive
Raleigh, North Carolina
EYC COMPANIES

PROJECT	1915
DATE	09JAN20
DRAWN BY	WJP
CHECKED BY	CMW
STAIR #3 - SECTION	
A6.04	

