




12 TYPICAL POST TO FOUNDATION CONNECTION
 SCALE: 1" = 1'-0" NOTES

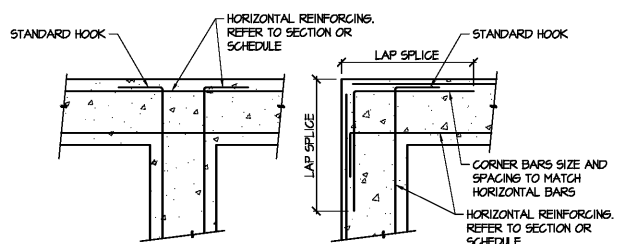


8 TYPICAL FOOTING INTERSECTION
 NOT TO SCALE

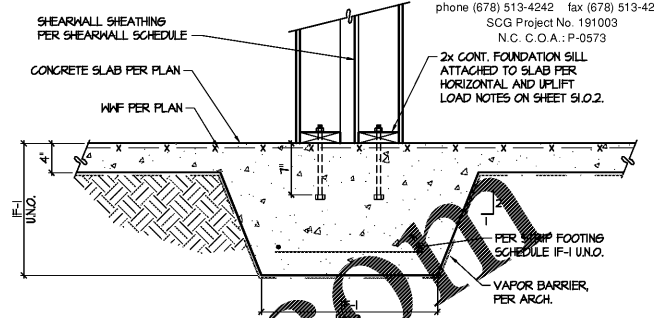


4 SECTION AT DOUBLE SEPARATION
 NOT TO SCALE

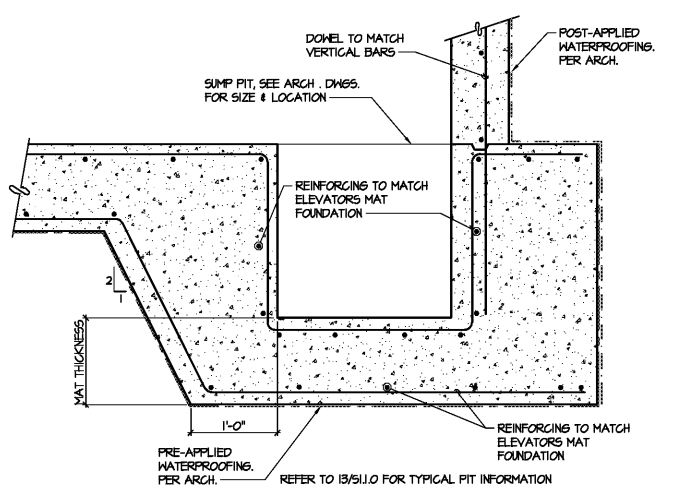


14 SECTION AT ELEVATOR SUMP PIT
 NOT TO SCALE

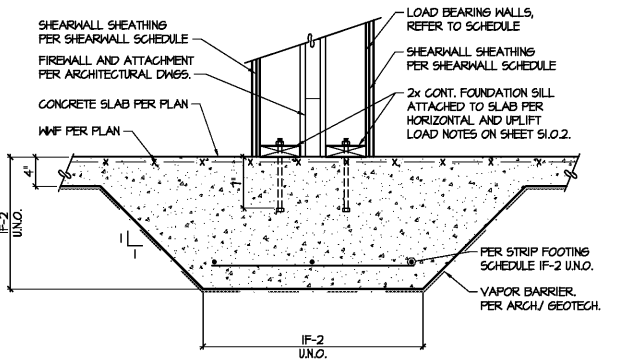


11 SECTION AT FIREWALL FOOTING
 NOT TO SCALE

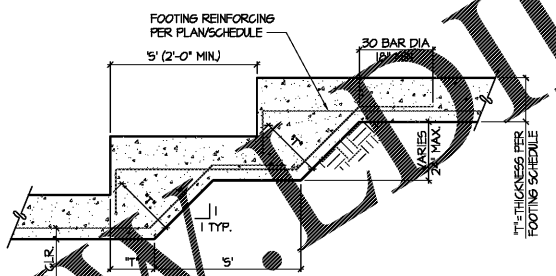


7 TYPICAL FOOTING STEP WITH CONCRETE WALL
 NOT TO SCALE

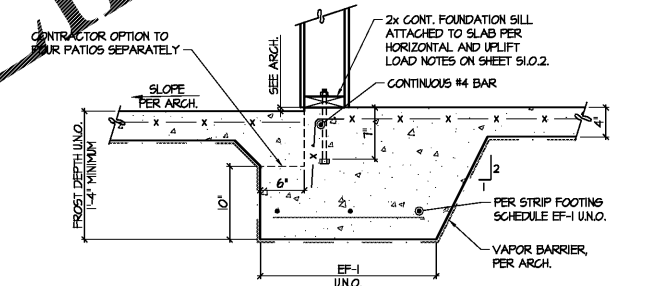


3 SECTION AT PATIO
 NOT TO SCALE

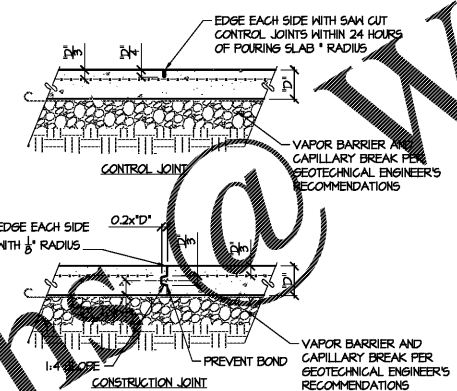


10 TYPICAL SLAB JOINT
 NOT TO SCALE

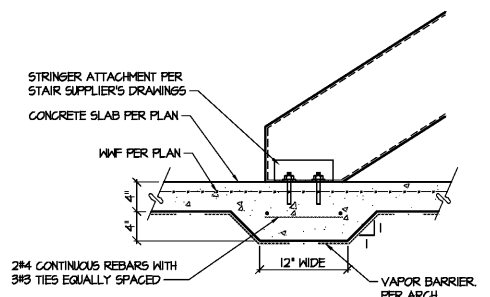


6 SECTION AT STAIR STRINGER
 NOT TO SCALE

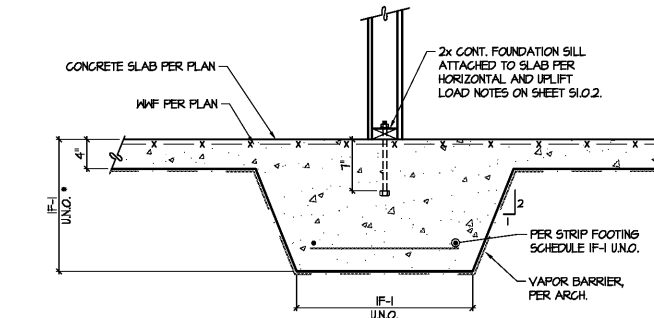


2 SECTION AT INTERIOR WALL
 NOT TO SCALE

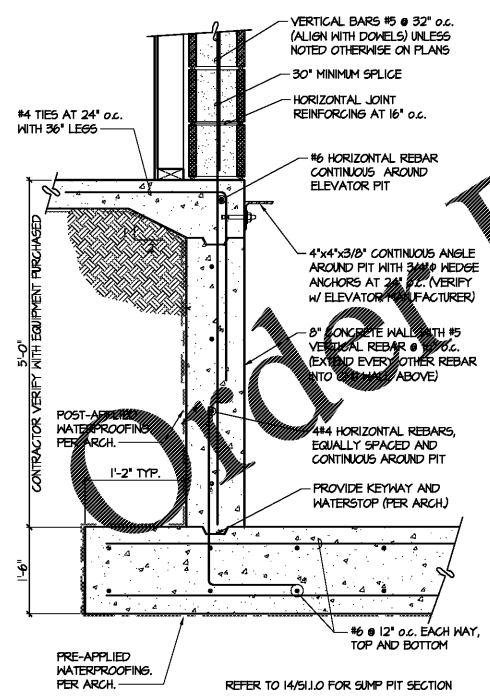


13 SECTION AT ELEVATOR PIT
 NOT TO SCALE

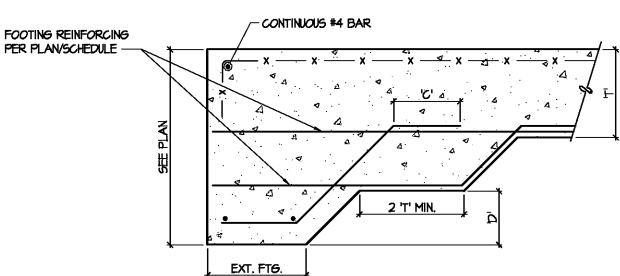

9 TYPICAL THICKENED SLAB STEP
 NOT TO SCALE

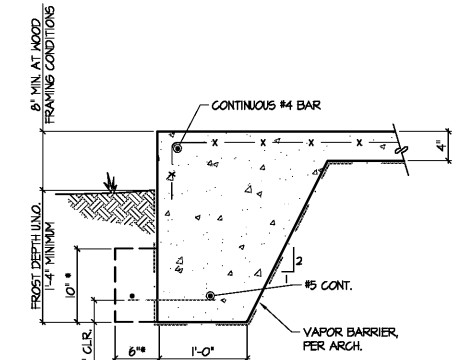

5 TYP. EXT. FOOTING
 NOT TO SCALE

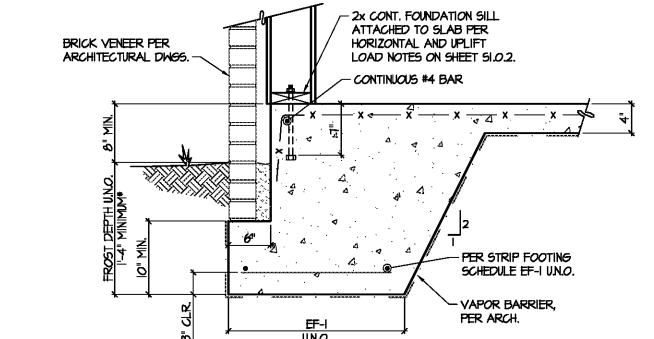

1 SECTION AT EXTERIOR WALL
 NOT TO SCALE

NOTES:
 1) C' = 30 x BAR DIA. OR 1'-6" MINIMUM
 2) T' = FOOTING THICKNESS
 3) D' = DEPTH OF STEP VARIES, 18" MAX.
 REFER TO OTHER DETAILS FOR EXTERIOR FOOTING PROFILE.

* PROVIDE BRICK LEDGE WITH ADDITIONAL CONTINUOUS #5 BAR AND #4 TIES @ 48" o.c. AT BRICK VENEER CONDITIONS.

03FEB20 PRICING SET

PROJECT 1915
 DATE 06NOV19
 DRAWN BY SCG
 CHECKED BY F80

CONCRETE SECTIONS
S1.1.0