



ENGLISH & ASSOCIATES
ARCHITECTS, INC.
3084 MERCER UNIVERSITY DRIVE, SUITE 100
ATLANTA, GEORGIA 30341
DENGGLISH@ENGLISHASSOCIATESINC.COM

JOB PROGRESS:
ITEM: DATE:

REVISIONS:
TAG: DATE:

This drawing, as an instrument of service, is and shall remain the property of the Architect. It shall not be reproduced, copied, or used in any way without the written permission of the Architect. All questions to be submitted as a formal request for information to the Architect of Record.

ALEXANDRIA
AN APARTMENT COMMUNITY
FOR
Bobo Family Group
HUNTSVILLE, ALABAMA

JOB NUMBER:

DRAWN BY:

CHECKED BY:

ELECTRICAL RISER DIAGRAMS

SHEET NO.


E-16.3

BLDG. 3 SERVICE A CALCULATION
240/120V 1 PHASE 3 WIRE
PER NEC 2014, ART. 220.84 - MULTIFAMILY DWELLING
12876 TOTAL S.F. 12 DWELLING UNITS


CIRCUIT	VA/S.F.	LOAD (KVA)	DF	TOTAL LOAD (KVA)
SMALL APPLIANCE CIRCUITS	-	36.0	1.0	36.0
LAUNDRY CIRCUITS	-	18.0	1.0	18.0
DRYERS	-	60.0	1.0	60.0
GENERAL LTG. RECEPTACLES	3	38.6	1.0	38.6
RANGES	-	96.0	1.0	96.0
MICROWAVES/EXHAUST HOODS	-	12.0	1.0	12.0
DISPOSALS	-	9.6	1.0	9.6
DISHWASHERS	-	8.4	1.0	8.4
REFRIGERATORS	-	9.6	1.0	9.6
WATER HEATERS	-	54.0	1.0	54.0
HEAT PUMP COMPRESSORS	-	43.2	1.0	43.2
SUPPLEMENTAL HEAT	-	78	0.65	50.7
TOTAL KVA (DWELLING UNITS)	-	-	-	436.1
DEMAND KVA (DWELLING UNITS)	-	-	0.41	178.8
HOUSE LTG.	-	3.0	1.0	3.0
HOUSE RECEPT.	-	0.8	NEC	0.8
HOUSE MOTORS	-	0.0	1.0	0.0
HOUSE HVAC	-	0.5	1.0	0.5
HOUSE EQUIPMENT	-	9.9	1.0	9.9
TOTAL CALCULATED KVA	-	-	-	193.0
TOTAL CALCULATED AMPS	-	-	-	804.2
TOTAL METERS REQUIRED	-	-	-	13
MAIN DISCONNECT SIZE (AMPS)	-	-	-	1000

BLDG. 3 SERVICE B CALCULATION
240/120V 1 PHASE 3 WIRE
PER NEC 2014, ART. 220.84 - MULTIFAMILY DWELLING
12876 TOTAL S.F. 12 DWELLING UNITS

CIRCUIT	VA/S.F.	LOAD (KVA)	DF	TOTAL LOAD (KVA)
SMALL APPLIANCE CIRCUITS	-	36.0	1.0	36.0
LAUNDRY CIRCUITS	-	18.0	1.0	18.0
DRYERS	-	60.0	1.0	60.0
GENERAL LTG. RECEPTACLES	3	38.6	1.0	38.6
RANGES	-	96.0	1.0	96.0
MICROWAVES/EXHAUST HOODS	-	12.0	1.0	12.0
DISPOSALS	-	9.6	1.0	9.6
DISHWASHERS	-	8.4	1.0	8.4
REFRIGERATORS	-	9.6	1.0	9.6
WATER HEATERS	-	54.0	1.0	54.0
HEAT PUMP COMPRESSORS	-	43.2	1.0	43.2
SUPPLEMENTAL HEAT	-	78	0.65	50.7
TOTAL KVA (DWELLING UNITS)	-	-	-	436.1
DEMAND KVA (DWELLING UNITS)	-	-	0.41	178.8
TOTAL CALCULATED KVA	-	-	-	178.8
TOTAL CALCULATED AMPS	-	-	-	745.1
TOTAL METERS REQUIRED	-	-	-	12
MAIN DISCONNECT SIZE (AMPS)	-	-	-	1000

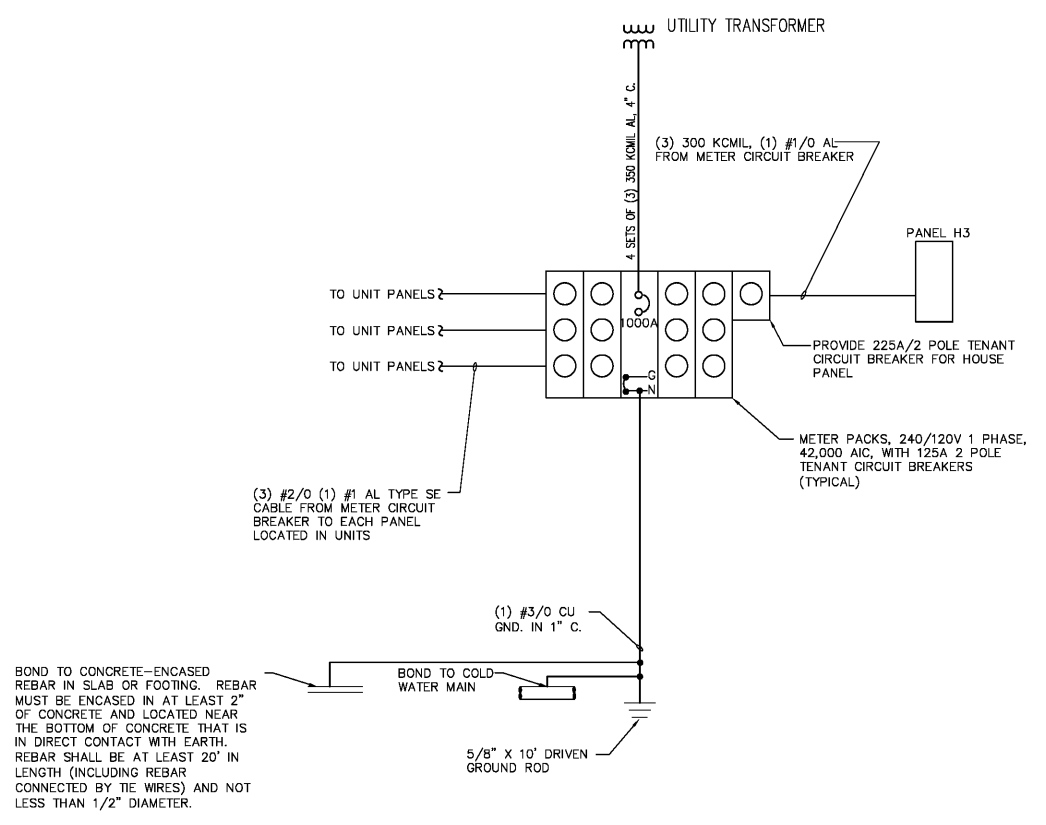

1 ELECTRICAL RISER DIAGRAM - BLDG. 3A
E-16.3 NOT TO SCALE

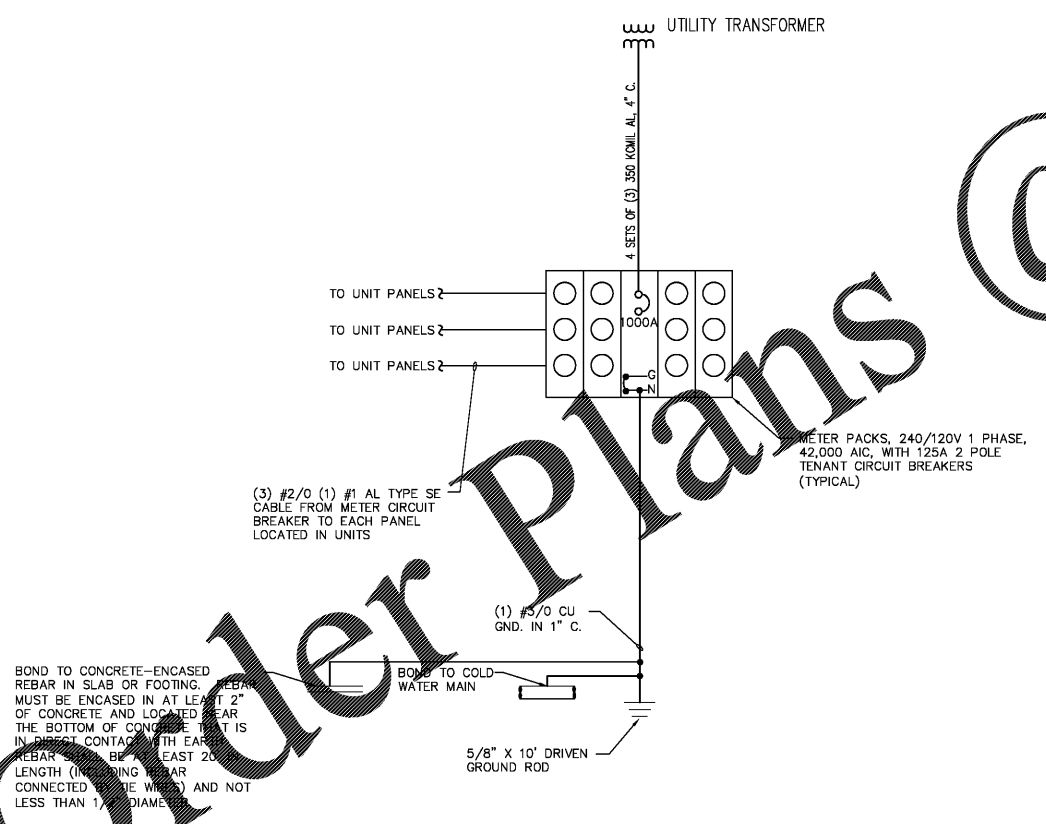

2 ELECTRICAL RISER DIAGRAM - BLDG. 3B
E-16.3 NOT TO SCALE

WWW.LDILine.com

Order Plans @