



ENGLISH & ASSOCIATES ARCHITECTS, INC.
 3084 MERCER UNIVERSITY DRIVE, SUITE 100
 ATLANTA, GEORGIA 30341
 DENGGLISH@ENGLISHASSOCIATESINC.COM

JOB PROGRESS:
 ITEM: DATE:

REVISIONS:
 TAG: DATE:

This drawing, as an instrument of service, is and shall remain the property of the Architect. It shall not be reproduced, copied, or used in any way without the written permission of the Architect. All questions to be submitted as a formal request for information to the Architect of Record.

ALEXANDRIA
 AN APARTMENT COMMUNITY
 FOR
Bobo Family Group
 HUNTSVILLE, ALABAMA

JOB NUMBER:

DRAWN BY:

CHECKED BY:

ELECTRICAL RISER DIAGRAMS

SHEET NO.


E-16.9

BLDG. 11 SERVICE A CALCULATION
 240/120V 1 PHASE 3 WIRE
 PER NEC 2014, ART. 220.84 - MULTIFAMILY DWELLING
 11268 TOTAL S.F. 12 DWELLING UNITS


CIRCUIT	V.A.S.F.	LOAD (KVA)	DF	TOTAL LOAD (KVA)
SMALL APPLIANCE CIRCUITS	-	36.0	1.0	36.0
LAUNDRY CIRCUITS	-	18.0	1.0	18.0
DRYERS	-	60.0	1.0	60.0
GENERAL LTG. RECEPTACLES	3	33.8	1.0	33.8
RANGES	-	96.0	1.0	96.0
MICROWAVES/EXHAUST HOODS	-	12.0	1.0	12.0
DISPOSALS	-	9.6	1.0	9.6
DISHWASHERS	-	8.4	1.0	8.4
REFRIGERATORS	-	9.6	1.0	9.6
WATER HEATERS	-	54.0	1.0	54.0
HEAT PUMP COMPRESSORS	-	38.6	1.0	38.6
SUPPLEMENTAL HEAT	-	60	0.65	39.0
TOTAL KVA (DWELLING UNITS)	-	-	-	415.0
DEMAND KVA (DWELLING UNITS)	-	-	0.41	170.1
HOUSE LTG.	-	3.2	1.0	3.2
HOUSE RECEPT.	-	1.2	NEC	1.2
HOUSE MOTORS	-	0.0	1.0	0.0
HOUSE HVAC	-	0.5	1.0	0.5
HOUSE EQUIPMENT	-	29.6	1.0	29.6
TOTAL CALCULATED KVA	-	-	-	204.7
TOTAL CALCULATED AMPS	-	-	-	852.8
TOTAL METERS REQUIRED	-	-	-	13
MAIN DISCONNECT SIZE (AMPS)	-	-	-	1000

BLDG. 11 SERVICE B CALCULATION
 240/120V 1 PHASE 3 WIRE
 PER NEC 2014, ART. 220.84 - MULTIFAMILY DWELLING
 10566 TOTAL S.F. 12 DWELLING UNITS

CIRCUIT	V.A.S.F.	LOAD (KVA)	DF	TOTAL LOAD (KVA)
SMALL APPLIANCE CIRCUITS	-	36.0	1.0	36.0
LAUNDRY CIRCUITS	-	18.0	1.0	18.0
DRYERS	-	60.0	1.0	60.0
GENERAL LTG. RECEPTACLES	3	31.7	1.0	31.7
RANGES	-	96.0	1.0	96.0
MICROWAVES/EXHAUST HOODS	-	12.0	1.0	12.0
DISPOSALS	-	9.6	1.0	9.6
DISHWASHERS	-	8.4	1.0	8.4
REFRIGERATORS	-	9.6	1.0	9.6
WATER HEATERS	-	54.0	1.0	54.0
HEAT PUMP COMPRESSORS	-	38.6	1.0	38.6
SUPPLEMENTAL HEAT	-	60	0.65	39.0
TOTAL KVA (DWELLING UNITS)	-	-	-	412.9
DEMAND KVA (DWELLING UNITS)	-	-	0.41	169.3
TOTAL CALCULATED KVA	-	-	-	169.3
TOTAL CALCULATED AMPS	-	-	-	705.4
TOTAL METERS REQUIRED	-	-	-	12
MAIN DISCONNECT SIZE (AMPS)	-	-	-	1000

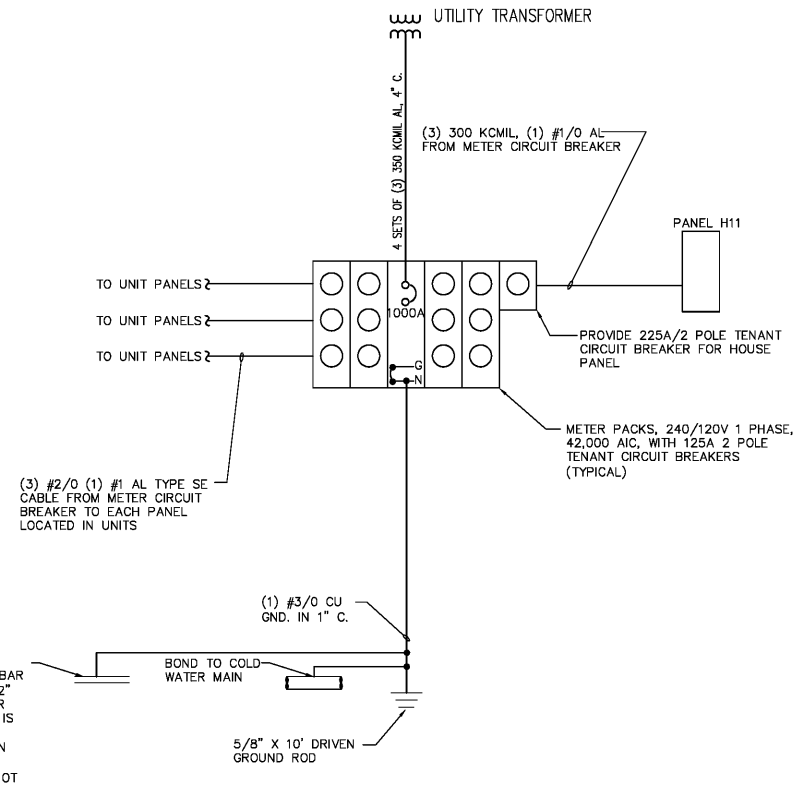

1 ELECTRICAL RISER DIAGRAM - BLDG. 11A
 E-16.9 NOT TO SCALE

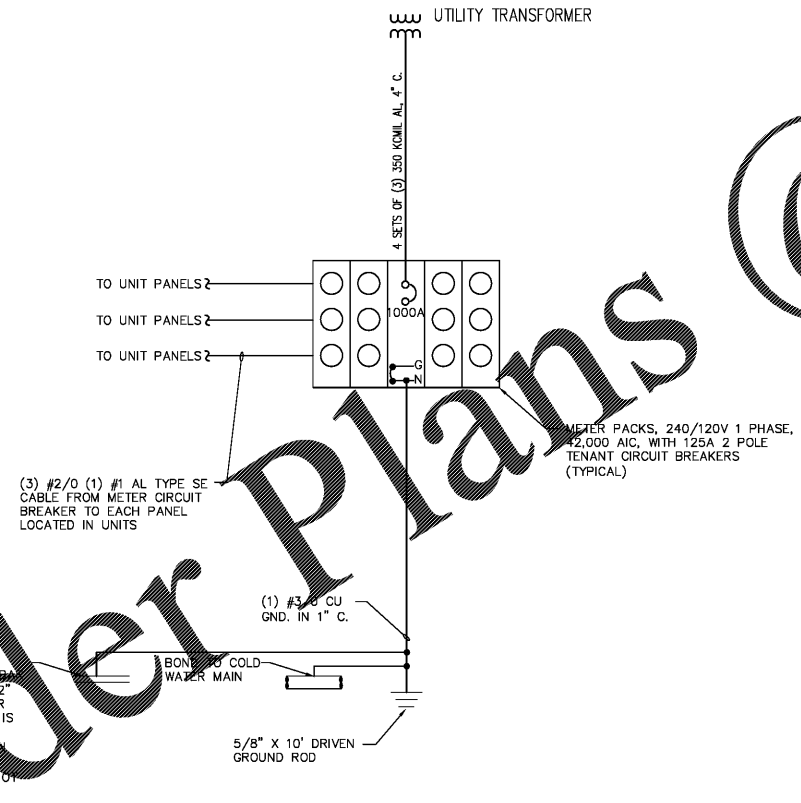

2 ELECTRICAL RISER DIAGRAM - BLDG. 11B
 E-16.9 NOT TO SCALE

Order Plans @ WWW.LDILine.com