


REACH-IN FREEZER/COOLER UNIT

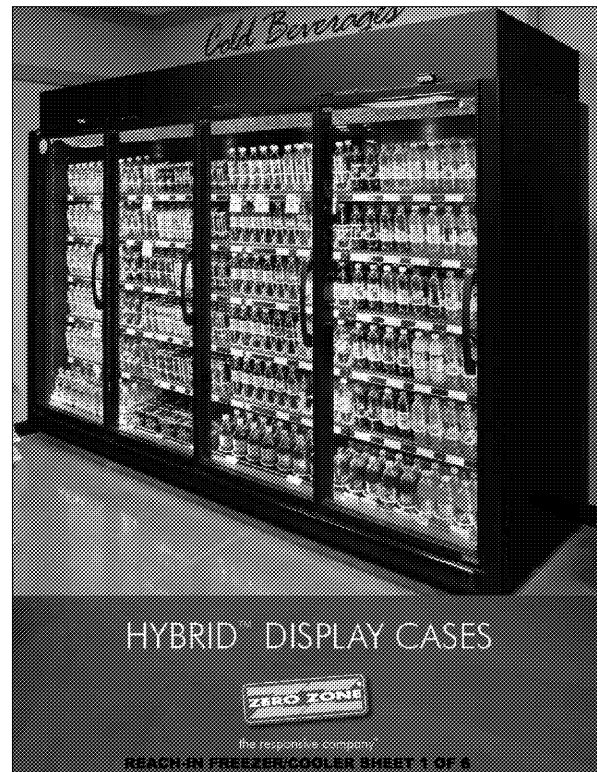

THE BEST OF BOTH WORLDS

Zero Zone Hybrid™ freezers and coolers combine all of the benefits of a self-contained display case with the selling power and reliability of a supermarket case. Bringing together the best of both worlds, these remote cases are configured with a remarkably easy-to-install, top-mount modular refrigeration kit.

- ✓ A 2 door Hybrid™ has the same capacity as a typical 3 door self-contained unit... in 12" less floor-space!
- ✓ Cases fit through 80" tall doorways!
- ✓ Everything is pre-wired and labeled.
- ✓ Pre-charged refrigeration piping with quick connect break-out couplings.
- ✓ **Electronic control** — time clock, temperature and defrost control, vapor and defrost temperature alarm, and network communication capability.
- ✓ **Condensate collection and removal system** — collection pan, pump, float switch, condensate discharge pan with heater element, and connecting tubing.

*Optional base configurations are available for 4-Door™ Mechanical Hybrid™ cases through doorways as low as 80". Consult factory for details.

Also Available as a Hybrid™...

Zero Zone products are built with today's modern retailers in mind—designed in the USA with the highest quality and innovation. Zero Zone gives you the flexibility, style, and energy efficiency you demand, while providing you with the responsive and personalized service you deserve.

2019 Zero Zone Inc. | 1101 S. Douglas Blvd. | North Platte, NE 68901-2761
 Toll Free: 800-333-3761 | Fax: 402-251-5882
 Zero Zone.com

Dollar Tree/Family Dollar Highlight™ Merchandiser Hybrid™ Specs

Medium and Low Temp Hybrid™ Reach-ins with 30" x 58" Doors RHCC30 & RHZC30


These Zero Zone Hybrid™ cases are designed to be installed within the U.S. door codes 30", 36", 42", and 48" door heights. *Zero Zone Hybrid™ is defined and listed as a remote refrigerated display case.

PHYSICAL DATA	Medium Temp						Low Temp					
	110V	115V	120V	125V	130V	135V	110V	115V	120V	125V	130V	135V
Package (H x W x D)	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0
Package Weight (lb.)	168	168	168	168	168	168	168	168	168	168	168	168
Net Weight (lb.)	98	98	98	98	98	98	98	98	98	98	98	98
Net Weight (kg)	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4

ELECTRICAL DATA	WITH CONDENSATE EVAPORATION SYSTEM						WITHOUT CONDENSATE EVAPORATION SYSTEM					
	110V	115V	120V	125V	130V	135V	110V	115V	120V	125V	130V	135V
SCOP (amp)	15	15	15	15	15	15	15	15	15	15	15	15
SCOP (kW)	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65	1.65

REGULATORY DATA

Model	110V	115V	120V	125V	130V	135V
RHCC30	10.5	10.5	10.5	10.5	10.5	10.5
RHZC30	10.5	10.5	10.5	10.5	10.5	10.5

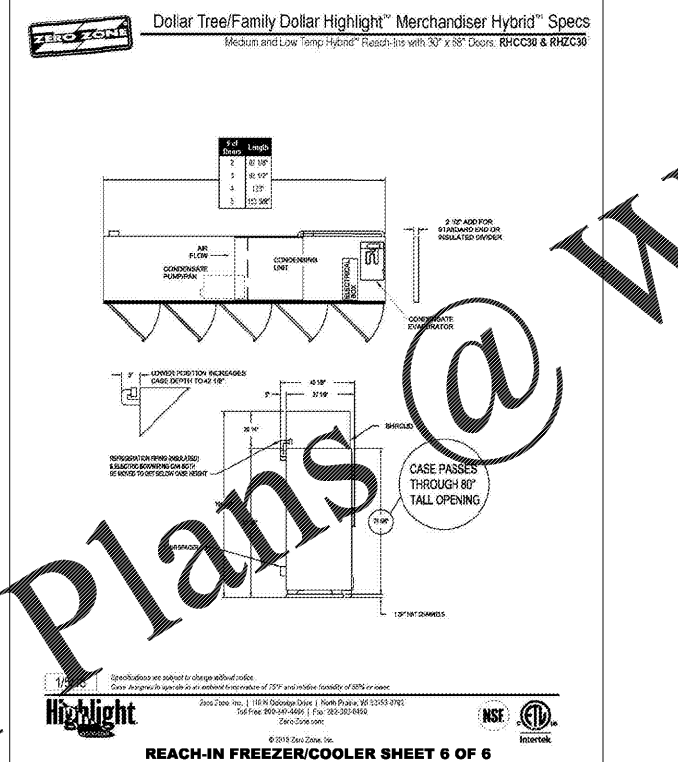

REACH-IN FREEZER/COOLER SHEET 3 OF 6

REACH-IN FREEZER/COOLER SHEET 4 OF 6

Order Plans @

WWW.LDOnline.com

description
by
date
mark
revisions

FOR INFORMATION ONLY

REFRIGERATION SPECIFICATIONS
REACH-IN UNIT DETAILS AND SPECIFICATIONS

DSI

FOR REFERENCE ONLY