


1 Swing Gates
N.T.S.

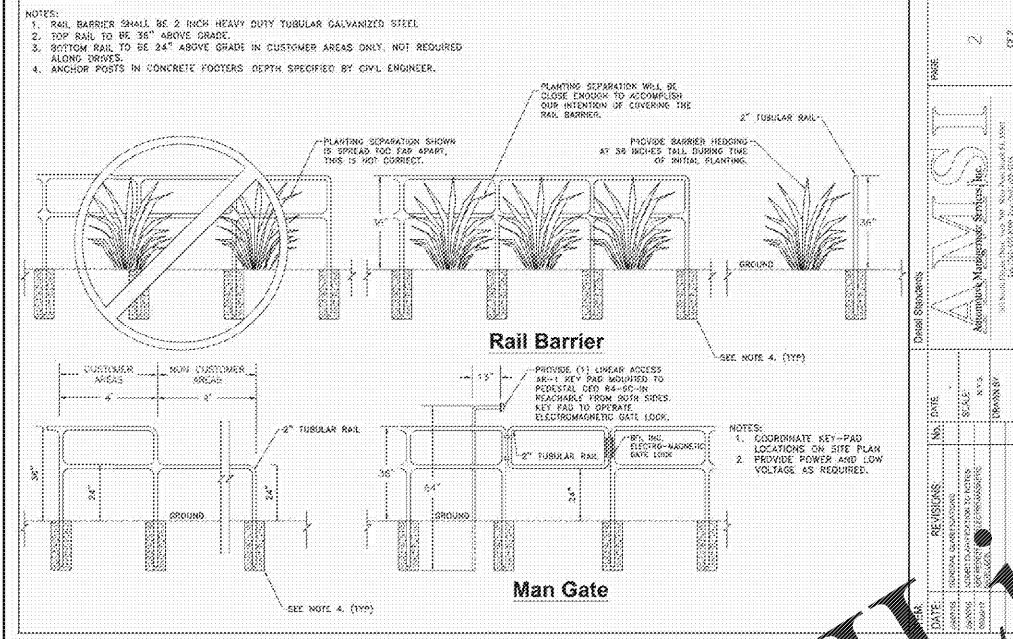

2 Rail Barrier
N.T.S.

With so many keypads, Linear makes it easy to build single entry point systems.

COMMON FEATURES

- Up to 486 programmable input codes.
- 4 independent outputs with programmable actions, such as tone, flash.
- Dual color LED indicators for access, lockout, and programming status.
- Facile feedback controls complete key presses.
- Internal siren with adjustable volume levels.

ENVIRONMENTAL

Temperature: 32°F to +149°F (-0°C to +65°C)
Humidity: 5% to 95% non-condensing

AK-1 EXTERIOR SURFACE MOUNT KEYPAD

- Rugged, cast aluminum enclosure for outdoor use (bolts) mounting on a wall or pedestal.
- Key lock secures keypad to mounting backplate.
- Protecting key matrix on down light.

Specifications

MECHANICAL

Dimensions: 5.00 in W x 3.50 in H x 3.00 in D (127.0 x 88.9 x 76.2 mm)

ELECTRICAL

Current: 10 mA typical, 140 mA maximum

AK-2 INTERIOR KEYPAD WITH INTERCHANGABLE BEZELS

- Attractive styling with interchangeable bezels in stainless steel, bronze, white, aluminum, and satin chrome.
- Brilliant LED backlighting illuminates keys.
- Rugged metal keys made of brass.
- Easy mounting in a single gang box.
- Tamper proof hex screws secure keypad to mounting backplate.

Specifications

MECHANICAL

Dimensions: 5.00 in W x 3.00 in H x 3.00 in D (127 x 76.2 mm)


ELECTRICAL

Current: 10 mA typical, 140 mA maximum


Common Specifications

ELECTRICAL

Voltage: 12-24 Vac or 5dc (ac supply must be isolated; power can be from access device or separate supply)
Circuit: Relay - 1, Form C - 5 across @ 28 Vdc maximum
Relay: 1 (Circuit's Form C) 1 amp @ 28 Vdc maximum
Solid-state outputs (Output 1 & 2): 250 mA @ 24 Vdc maximum
Siren: 100 mA @ 24 Vdc maximum

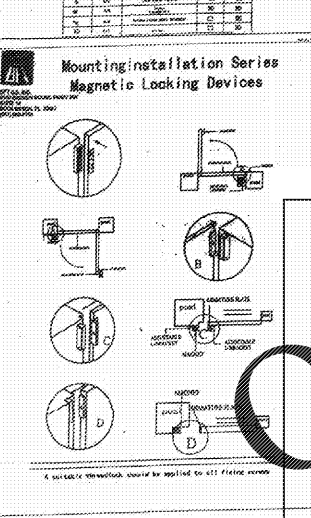

3 Site Control Details
N.T.S.

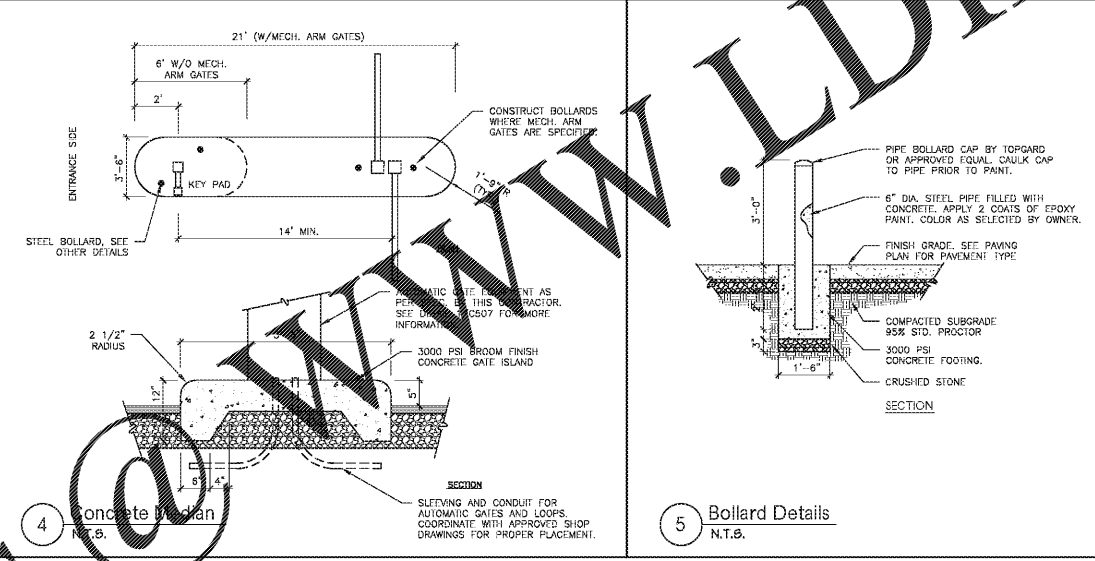

4 Concrete Island
N.T.S.

5 Bollard Details
N.T.S.

TOPGARD Concrete Bollard Caps

TOPGARD Pipe Bollard Caps

Professional results at a lower cost than traditional hand finishing.

TOPGARD concrete pipe bollard caps provide a superior concrete finish that is:

- Applied in 10 minutes
- Applied in 10 minutes
- Applied in 10 minutes
- Applied in 10 minutes
- Applied in 10 minutes
- Applied in 10 minutes



Corp. NC License: F-1320

Order Plans @ WWW.LDILLINE.COM

Hyundai of South Charlotte
10518 Cadillac Street
Pineville, North Carolina

Project No: 17000070.02
Date: 03.04.2020
Revisions:

Sheet Title:
Site Construction Details

Sheet No:
C506