


MARK	LOCATION	NUMBER OF LEAVES	DOOR TYPE	DOORS							FRAME							HARDWARE SET	FIRE RATING	COMMENTS
				WIDTH	HEIGHT	DEPTH	MATERIAL	FINISH	MANUFACTURER	MODEL	FRAME TYPE	MATERIAL	FINISH	HEAD	JAMB	SILL				
1	SALES FLOOR	2	A	6'-0"	7'-0"	0'-1 3/4"	GLASS/ALUM	DARK BRONZE ANODIZED	OLD CASTLE	-	STORE FRONT A1	ALUMINUM	DARK BRONZE ANODIZED	15/A701	10/A701	5/A701	1	-	PAIR OF DOORS - MEDIUM STILE WITH 10" BOTTOM RAIL. SHGC VALUE = 0.27, U-VALUE = 6.0	
2	SALES FLOOR	2	A	6'-0"	7'-0"	0'-1 3/4"	GLASS/ALUM	DARK BRONZE ANODIZED	OLD CASTLE	-	STORE FRONT B1	ALUMINUM	DARK BRONZE ANODIZED	15/A701	10/A701	5/A701	1	-	PAIR OF DOORS - MEDIUM STILE WITH 10" BOTTOM RAIL. SHGC VALUE = 0.27, U-VALUE = 6.0	
3	RECEIVING	2	B	6'-0"	7'-0"	0'-1 3/4"	HOLLOW METAL	EP-1	ASSA ABLDY	-	2	HOLLOW METAL	EP-1	11/A701	6/A701	1/A701	2	-	INSULATED PAIR OF DOORS, R-VALUE = 5.21	
4	DRY GOODS RECEIVING	1	C	3'-0"	7'-0"	0'-1 3/4"	HOLLOW METAL	EP-1	-	-	2	HOLLOW METAL	EP-1	11/A701	6/A701	1/A701	3	-	INSULATED DOOR, R-VALUE = 5.21	
5	WOMEN'S RESTROOM	1	C	3'-0"	7'-0"	0'-1 3/4"	SOLID CORE PARTICLE BOARD	WILSONART GREY 1500-60	VT INDUSTRIES	303H	1	HOLLOW METAL	IP-10	12/A701	7/A701	2/A701	4	-	UNDERCUT DOOR 1"	
6	MEN'S RESTROOM	1	C	3'-0"	7'-0"	0'-1 3/4"	SOLID CORE PARTICLE BOARD	WILSONART GREY 1500-60	VT INDUSTRIES	303H	1	HOLLOW METAL	IP-10	12/A701	7/A701	2/A701	4	-	UNDERCUT DOOR 1"	
7	DATA	2	H	3'-0"	9'-10"	0'-1 3/4"	WOOD	WAREHOUSE OAK	MILLWORK	-	1	BY MANUF.	WAREHOUSE OAK	--	--	--	BY MANUF.	-	LOUVERED DOOR	
8	SALES FLOOR	1	--	3'-0"	7'-0"	0'-1 3/4"	--	--	-	-	BY LOCKNET	WELDED HOLLOW METAL	IP-7	13/A701	8/A701	3/A701	BY MANUF.	-		
9	RECEIVING	1	--	3'-0"	7'-0"	0'-1 3/4"	--	--	-	-	BY LOCKNET	WELDED HOLLOW METAL	IP-7	13/A701	8/A701	3/A701	BY MANUF.	-		
10	FREEZER	1	E	3'-0"	7'-0"	0'-2"	STEEL	STAINLESS	CROWNTONKA	#F3066C	BY MANUF.	GALVANIZED STEEL	EMBOSSED	--	--	--	6	-	DUAL THERMOMETER, HEATED VENT, LIGHT SWITCH, PROVIDE KICK PLATE AND VISION WINDOW.	
11	BEVERAGE COOLER	1	F	3'-0"	7'-0"	0'-2"	STEEL	EMBOSSED GALVANIZED	CROWNTONKA	#C3066C	BY MANUF.	GALVANIZED STEEL	EMBOSSED	--	--	--	6	-	DUAL THERMOMETER, HEATED VENT, LIGHT SWITCH, PROVIDE KICK PLATE AND VISION WINDOW.	
12	ELECTRICAL CLOSET	1	G	10'-0"	8'-8"	0'-2"	STEEL	DARK BRONZE	WAYNE DALTON	823 C	BY MANUF.	STEEL	EP-1	14/A701	9/A701	4/A701	BY MANUF.	-	INSULATED METAL COILING DOOR, MANUAL OPERATION, PROVIDE EXTERIOR MOUNT TYPE WITH SEALS AND WEATHERSTRIPPING, R-VALUE = 1.28	
13	TOWER ACCESS DOOR	1	D	3'-0"	7'-0"	0'-1 3/4"	HOLLOW METAL	EP-1	-	-	3	HOLLOW METAL	EP-1	-	-	-	7	-	PROVIDE LOWERED VENT	
14	DUMPSTER ENCLOSURE STORAGE	1	J	3'-0"	7'-0"	0'-1 3/4"	HOLLOW METAL	EP-1	-	-	3	HOLLOW METAL	EP-1	-	-	-	8	-	INSULATED DOOR, PROVIDE 18" X 6" LOUVERED	

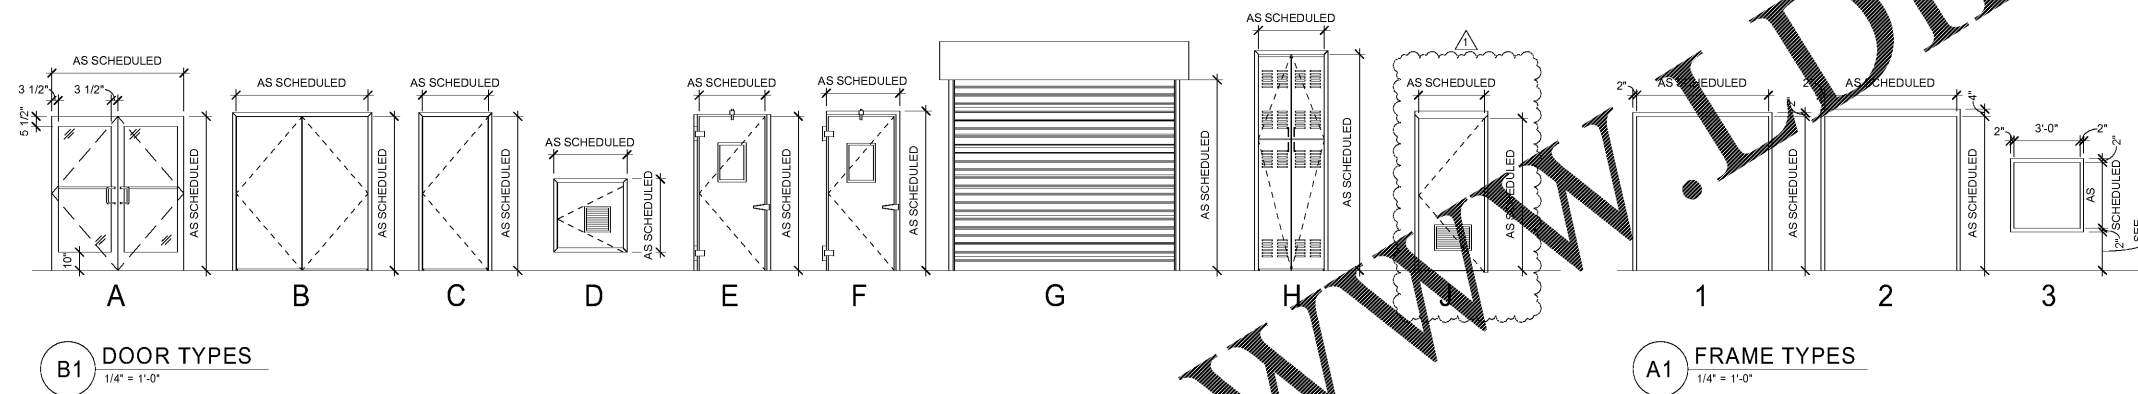

B1 DOOR TYPES
1/4" = 1'-0"

A1 FRAME TYPES
1/4" = 1'-0"

DOOR HARDWARE					SET 3: DRY GOODS RECEIVING					SET 6: COOLER/FREEZER				
QTY	ITEM	DESCRIPTION	MODEL NUMBER	FINISH	QTY	ITEM	MANUFACTURER	MODEL NUMBER	FINISH	QTY	ITEM	MANUFACTURER	MODEL NUMBER	FINISH
GROUP 1 DOUBLE ENTRY DOORS					SET 2: RECEIVING					SET 7: TOWER ACCESS DOOR				
2	CONTINUOUS HINGES	ROTON	ROTON 224HD	3	3	HINGES	MCKINNEY	MPB91 - 4 1/2" X 4 1/2"	US32D-NRP	1 PR	HINGES	IVES	5PB1 - 4 1/2" X 4 1/2"	652
1	3 POINT LOCK, THRESH. RPD, HEADER BOLT THUMBTURN	ADAMS RITE	MS1850-505/4015/4016	313	1	CYLINDER	LOCKNET	LN2049C SFIC MORTISE CYLINDER	626	1	DEADBOLT	SCHLAGE	B760T	626
1	PERMANENT KEY CORE (G KEYWAY) BY RACETRAC	ADAMS RITE	CK-3	313	1	RIM CYLINDER	LOCKNET	LN2050	626	1	PERMANENT KEY CORE	SCHLAGE	K1091	626
1	CYLINDER HOUSING SFIC	BEST	GI-626	613	1	SURFACE CLOSER	YALE	3501-PA 689	689	1	OVERHEAD HOLDER/STOP	GLYNN-JOHNSON	GJ450H	SP28
2	CLOSER	SCHLAGE	80-1	613	1	KICK PLATES	ROCKWOOD	K1050 8"X34"	US32D	1	SET PERMETER SEALS	NGP	5050	-
1	LCN	LCN	4040 X	695	1	LOCK PROTECTOR	ROCKWOOD	SD1260 US32D	US32D	SET 8: DUMPSTER ENCLOSURE STORAGE				
2	DROP PLATE	LCN	4040-18F	695	1	THRESHOLD	PEMKO	254A36"	626	1 PR	HINGES	PEMKO	CFM83HD1	626
2	FLUSH BOLTS	OBE	FB-1201	613	1	WEATHERSTRIPPING	PEMKO	18062CNB 36"	C	1	FLUSH BOLT	ROCKWOOD	580	626
1	DUST PROOF STRIKE	IVES	DPI	613	1	WEATHERSTRIPPING	PEMKO	303AV-72"X84"	A	1	DEADLOCK	FALCON	D141 BDC	689
2	SETS PUSH PULLS	OBE	PH-20 & PB-21	313	1	MISCELLANEOUS ITEM	PEMKO	303AV-84"X84"	A	1	PERMANENT KEY CORE	BY RACETRAC	-	626
1	THRESHOLD	OBE	TH-43	AL	1	MISCELLANEOUS ITEM	PEMKO	303AV-72"X84"	A	1	DOOR PULL	ROCKWOOD	107 X 70C	630
2	DOOR BOTTOM	OBE	D118/D120	313	1	WALL STOP	ROCKWOOD	HDCC-3012-626	626	1	OVERHEAD HOLDER/STOP	DONJO	3212	SP28
SET 4: RESTROOMS					1	THRESHOLD	PEMKO	254 72"	-	1	OVERHEAD RAIN DRIP	PEMKO	346 A	-
3	HINGES	ROCKWOOD	MPB79 - 4 1/2" X 4 1/2"	626	1	WEATHERSTRIPPING	PEMKO	18062CNB 36"	C	1	KICK PLATES (INTERIOR)	ROCKWOOD	10"X34" K1050	630
1	PUSH PLATE	ROCKWOOD	70 C - 4" X 16"	630	1	WEATHERSTRIPPING	PEMKO	303AV-84"X84"	A	1	KICK PLATES (EXTERIOR)	ROCKWOOD	10"X34" K1050	630
1	PULL PLATE	ROCKWOOD	107 X 70C 4" X 16"	630	1	MISCELLANEOUS ITEM	PEMKO	303AV-72"X84"	A	1	THRESHOLD	PEMKO	171A	627
1	CLOSER	YALE	1101BF	689	1	FLUSH BOLT	ROCKWOOD	555 12"	626	1	SET DOOR SEALS	PEMKO	S88D	627
1	KICK PLATES	ROCKWOOD	K1050 - 10" X 34"	630	1	DOOR BOTTOM SEALS	PEMKO	18062CNB	627	1	ASTRAGAL	BY HM DOOR MANUF.	-	627
1	MOP PLATE	ROCKWOOD	K1050 - 6" X 34"	630	1	PANIC DEVICE	DETEX	V4003 P 628 94 EB	626					
1	WALL STOP	ROCKWOOD	409	630										
1	THRESHOLD	-	2" WIDE MARBLE TO MATCH LEVEL OF TILE	-										
1	SIGN	ROCKWOOD	3" X 6" ADA SIGN	-										

DOOR GENERAL NOTES

- ALL DOOR GLAZING SHALL BE TEMPERED.
- REFER TO SHEET A001 FOR ADA AND OTHER CODE REQUIREMENTS.
- REFER TO DOOR AND GLAZING SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- DOOR THICKNESS SHALL BE A MINIMUM OF 18 GAUGE MATERIAL.
- EGRESS DOORS SHALL BE A MINIMUM OF 3'-0" IN WIDTH, 6'-8" IN HEIGHT. (IBC 1008.1.1)
- DOORS OPEN A MINIMUM OF 90 DEGREES. (IBC 1008.1.1)
- CLEAR WIDTH OF DOORWAY SHALL BE 32" MINIMUM. (2010 ADA 404.2.3)
- DOUBLE DOORS - AT LEAST ONE MUST COMPLY WITH THE STATEMENTS ABOVE. (IBC 1008.1.1)
- BOTTOM 10" OF DOOR SHALL HAVE A SMOOTH, UNINTERRUPTED SURFACE, KICK PLATE. (2010 ADA 404.2.10)
- VERTICAL CLEARANCE SHALL BE 80" MIN. DOOR CLOSER AND DOOR STOPS SHALL BE PERMITTED TO BE 78" ABOVE FINISHED FLOOR (2010 ADA 307.4)
- EFFORT TO OPERATE DOORS IS WITHIN PRESSURE ALLOWED.
 - INTERIOR DOORS - 5 LBS. MAXIMUM PRESSURE TO OPERATE. (2010 ADA 404.2.9)
 - EXTERIOR DOORS - 15 LBS. MAXIMUM PRESSURE TO OPERATE (2010 ADA 404.2.9)
- ALL DOORS TO HAVE LEVER HANDLES OR EQUIVALENT MOUNTED NOT MORE THAN 42 INCHES ABOVE FINISHED FLOOR. (2010 ADA 404.2.7)
- EXIT/EGRESS DOORS MEET 2010 ADA 101.1.2 (1.5) LEAS SAFETY AND NFPA FIRE SAFETY REQUIREMENTS.

DOOR HARDWARE NOTES

- EGRESS DOORS SHALL BE OPERABLE FROM THE INSIDE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE OR EFFORT. (IBC 1008.1.8)
- OPENING HARDWARE SHALL BE CENTERED BETWEEN 34" AND 48" ABOVE FINISH FLOOR. (IBC 1008.1.8)

DOOR THRESHOLD

- FLOOR(S) OR LANDING(S) SHALL NOT BE MORE THAN 1/2" LOWER THAN THE TOP OF THE THRESHOLD DOORWAY. (2010 ADA 404.2.5)
- CHANGE IN LEVEL BETWEEN 1/4" AND 1/2" SHALL BE BEVELED WITH A GRADIENT OF 1:2. (2010 ADA 303.3) NOTE: A 1/2" MAXIMUM VERTICAL EDGE IS ALLOWABLE AT THRESHOLDS.

DOOR CLOSER

- DOOR AND GATE CLOSER SHALL BE ADJUSTED SO THAT FROM AN OPEN POSITION OF 90 DEGREES, THE TIME REQUIRED TO MOVE THE DOOR TO A POSITION OF 12 DEGREES FROM THE LATCH IS 5 SECONDS MINIMUM. (2010 ADA 404.2.3)
- SPRING HINGES: DOOR & GATE HINGES SHALL BE ADJUSTED SO THAT FROM A POSITION OF 70 DEGREES, THE DOOR OR GATE SHALL MOVE TO A CLOSED POSITION IN 1.5 SECONDS MINIMUM (2010 ADA 404.2.8.2)

COAT HOOK

- THE MOUNTING HEIGHT FOR THE COAT HOOK AT THE ACCESSIBLE STALLS SHOULD BE AT 48" MAX TO THE TOP OF COAT HOOK. PER 2010 ADA.

RaceTrac
 RACETRAC PETROLEUM, INC.
 200 GALLERIA PARKWAY SOUTHEAST
 SUITE 900
 ATLANTA, GEORGIA 30339
 (770) 431-7600

PROJECT NAME
HWY 316 @ 81

BETHLEHEM
GA 30620
839 LOGANVILLE HWY

RACETRAC STORE NUMBER
#1304

PROTOTYPE SERIES 5.5K 2.0
2018 LH MO 0405

PLAN MODIFICATION NOTICE
SPB NO. 0405 DATE 12/18/18

HARDWARE FINISHES

- HINGES (EXTERIOR): 630 (US32D) SATIN STAINLESS STEEL.
- CONTINUOUS HINGES: 313 DARK BRONZE ANODIZED (ALUMINUM DOORS) AND 628 CLEAR ANODIZED (HOLLOW METAL DOORS).
- HINGES (INTERIOR METAL DOORS): 652 (US26D).
- LOCKS: 626 (US26D) SATIN CHROME PLATED.
- EXIT DEVICES WITH BATTERY POWERED ALARMS: 628 (US28).
- DOOR CLOSER: 689 (POWDER COATED).
- PULL PLATES: 630 (US32D) SATIN STAINLESS STEEL.
- PULL PLATES: 630 (US32D) SATIN STAINLESS STEEL.
- PROTECTIVE PLATES: 630 (US32D) SATIN STAINLESS STEEL.
- DOOR STOPS: 630 (US32D) SATIN STAINLESS STEEL OR 626 SATIN CHROME PLATED BRASS/BRONZE.
- OVERHEAD HOLDERS: SP28 (POWDER COAT).
- THRESHOLDS: 627 (US27) MILL FINISH ALUMINUM.
- WEATHERSTRIP: 628 (US28) CLEAR ANODIZED ALUMINUM.

DESIGN PROFESSIONALS

GPD GROUP
 Professional Corporation
 520 S. MAIN STREET, STE 2531
 AKRON, OH 44311

ISSUE/REVISION RECORD

DATE	DESCRIPTION
01/25/19	PERMIT SET
03/16/20	REFRESH TO 2020.0113

SHEET NUMBER
A700