MIAMI-DADE COUNTY

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 NW 25 Street, Room 208
Miami, Florida 33172-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Dryvit Systems, Inc.
One Energy Way
West Warwick, RI 02893

SCOPE:
This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).
This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (the Miami Dade County and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.
This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Dryvit Outsulation Plus MD EIF System over 5/8" 5-Ply Plywood Sheathing

APPROVAL DOCUMENT: Drawing No. **OPMDLSMPLY**, titled "Outsulation® Plus MD System over 5/8" 5-Ply Plywood", sheets 1 through 3 of 3, dated 09/19/2016, prepared by Dryvit Systems, Inc., signed and sealed by Scott Wolters, P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein. Each container (bucket or drum) inserts to be labeled. Unit is further defined as each roll of reinforcing mesh.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.
This NOA **revises NOA #17-0112.05** and consists of this page 1 and evidence pages E-1 and E-2, as well as approval documents mentioned above.
The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**

MIAMI-DADE COUNTY APPROVED

NOA No.: 17-0807.19
Expiration Date: March 2, 2022
Approval Date: November 9, 2017
Page 1

Dryvit Systems, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. **EVIDENCE SUBMITTED UNDER NOA #17-0112.05**

A. **DRAWINGS**
1. Drawing No. **OPMDLSMPLY**, titled "Outsulation® Plus MD System over 5/8" 5-Ply Plywood", sheets 1 through 3 of 3, dated 09/19/2016, prepared by Dryvit Systems, Inc., signed and sealed by Scott Wolters, P.E.

B. **TESTS**
1. Test reports on 11 Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of Dryvit Outsulation Plus MD Systems over 5/8" Plywood Sheathing, prepared by Intertek/ATI, Test Report No. **G1213.01-550-18**, dated 10/26/2016, signed and sealed by Justin P. McDonald, P.E.

C. **CALCULATIONS**
1. Anchor verification calculations prepared by Wolters Engineering, dated 12/09/2016, signed and sealed by Scott Wolters, P.E.

D. **QUALITY ASSURANCE**
1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. **MATERIAL CERTIFICATIONS**
1. None.

F. **STATEMENTS**
1. Statement letter of code conformance to the 5th edition (2014) FBC issued by Wolters Engineering, dated 12/09/2016, signed and sealed by Scott Wolters, P.E.
2. Statement letter of no financial interest issued by Wolters Engineering, dated 12/09/2016, signed and sealed by Scott Wolters, P.E.

Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 17-0807.19
Expiration Date: March 2, 2022
Approval Date: November 9, 2017

E-1

Dryvit Systems, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. **NEW EVIDENCE SUBMITTED**

A. **DRAWINGS**
1. None.

B. **TESTS**
1. None.

C. **CALCULATIONS**
1. None.

D. **QUALITY ASSURANCE**
1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. **MATERIAL CERTIFICATIONS**
1. None.

F. **STATEMENTS**
1. Statement letter of code conformance to the 6th Edition (2017) FBC issued by Wolters Engineering, dated 07/17/2017, signed and sealed by Scott Wolters, P.E.

Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 17-0807.19
Expiration Date: March 2, 2022
Approval Date: November 9, 2017

E-2

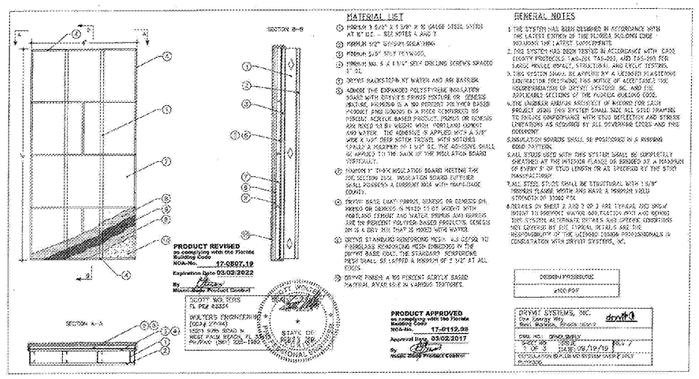

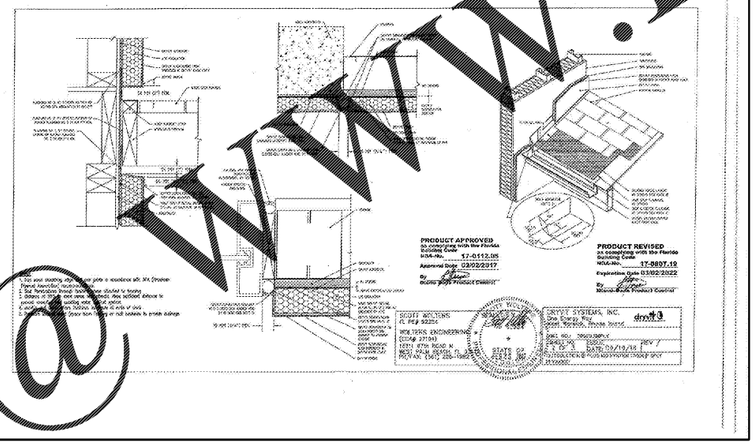

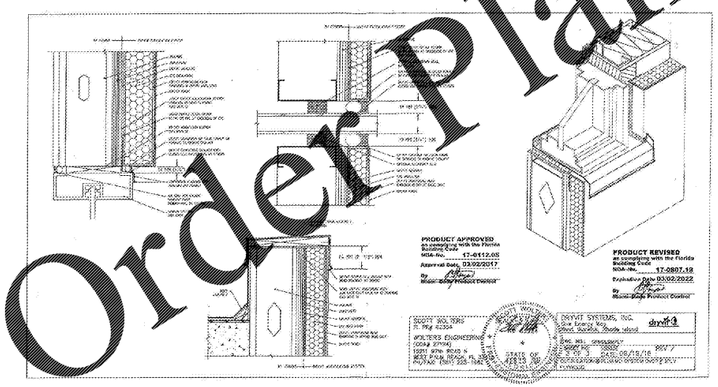

Order Plans @ WWW.LDILine.com

PANDA EXPRESS CHINESE KITCHEN

PANDA RESTAURANT GROUP INC.
1683 Walnut Grove Ave.
Rosemead, California
91770
Telephone: 626.799.9898
Facsimile: 626.372.8288

All ideas, designs, arrangement and plans indicated or represented by this drawing are the property of Panda Express Inc. and were created for use on this specific project. None of these ideas, designs, arrangements or plans may be used by or disclosed to any person, firm, or corporation without the written permission of Panda Express Inc.

REVISIONS:

ISSUE DATE:

1	ISSUED FOR BID & PERMIT	12-11-18
2	BID SET	01-30-19

DRAWN BY: [redacted]

PANDA PROJECT #: S8-19-D6573

ARCH PROJECT #: P7336

cph
www.cphcorp.com
A Full Service A & E Firm

Plans Prepared By:
CPH, Inc.
500 West Fulton St.
Sanford, Fl. 32771
Ph: 407.322.6841

Licenses:
Eng. C.O.A. No. 2750-E
Survey L.B. No. CA-909-LS
Arch. Lic. No. 285-342

FOR INFORMATION ONLY
FOR APPROVAL DOCUMENTATION

PANDA EXPRESS

WARM & WELCOME 2200
ATLANTIC BLVD & MARKETPLACE DR
JACKSONVILLE, FL 32225

FAD - 5.0

FLORIDA PRODUCT APPROVAL
DRYVIT OUTSULATION PLUS MED EIF SYSTEM

TRUE WARM & WELCOME 2200