

DOOR HARDWARE SCHEDULE

HARDWARE NOTES:
1. ALL HARDWARE TO BE ADA AND ANSI COMPLIANT.
2. VERIFY COMPATIBILITY OF HARDWARE SPECIFIED. NOTIFY ARCHITECT OF INCOMPATIBILITY ISSUES PRIOR TO ORDERING AND INSTALLATION.

SET NO. 1 (DR. 1)
1 CYLINDER 20-062 X 626 - "E" KEYWAY (REMOVABLE CORE)..... SCHLAGE

(FOLLOWING REQUIRED HARDWARE FURNISHED WITH WINDOW FRAMING DOOR SYSTEM)
1 PAIR OFFSET PIVOTS: 195168 X 626..... RIXON
1 DEADLOCK: MS1850S X 626..... ADAMS RITE
1 DEADLOCK LEVER (WITH "LOCKED" AND "OPEN" INDICATOR):
4550 X 626..... ADAMS RITE
1 STRIKE: MS4002 X 626..... ADAMS RITE
1 SET PUSH / OFFSET PULL CO-12 X CP-11 X 626..... KAWNEER
1 CLOSER: 4040XP-3077-187J-TB X 689 (ADJ. TO 8.5 LBS.)..... LCN
1 SET PERIMETER GASKETS: POLYMERIC..... PEMKO
1 SWEEP: 345X X LENGTH REQUIRED..... PEMKO
1 THRESHOLD: 270A X LENGTH REQUIRED (OFFSET PIVOT COMPATIBLE) (ANSI & ADA COMPLIANT)..... PEMKO

SET NO. 2 (DR. 2)
3 HINGES: BB1191 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 CYLINDER: 20-062 X 626 - "E" KEYWAY (REMOVABLE CORE)
PROVIDE (2) SECURITY KEYS: (1) CORE KEY, (1) BITTED..... SCHLAGE
1 EXIT PANIC LOCK: 9300L X 630 X 630 X RT03 X 630 X HC (THROUGH SEX BOLT MOUNTING)..... DORMA
1 CLOSER: 861107 X 630 X SNB1 X 689 (ADJ. TO 8.5 LBS.) (ROUGH SET FOR MOUNTING)..... DORMA
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... IVES
1 LATCH PLATE: 190S X 8" X 3 3/4" X 630..... HAGER
1 DOOR BOTTOM SWEEP: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 3 (DR. 3)
REQUIRED HARDWARE FURNISHED WITH OVERHEAD DOOR SYSTEM (LOCKING FROM INSIDE ONLY)
SET NO. 4 (DR. 4)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 OFFICE LOCK (LEVER HANDLE): AU530TLN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 5 (DR. 5, 6)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 PRIVACY LOCK (LEVER HANDLE): AU5302LN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 6 (DR. 7)
3 HINGES: BB1191 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 EXIT PANIC LOCK: 9500B X 416 X 630 (EXIT ONLY)..... TELL
1 CLOSER: 5300MLT X FC X SX2 X 689 (ADJ. TO 8.5 LBS.) (THROUGH SEX BOLT MOUNTING)..... HAGER
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... LATCHGUARD
1 DOOR BOTTOM SWEEP: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 2 (DR. 2)
3 HINGES: BB1191 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 CYLINDER: 20-062 X 626 - "E" KEYWAY (REMOVABLE CORE)
PROVIDE (2) SECURITY KEYS: (1) CORE KEY, (1) BITTED..... SCHLAGE
1 EXIT PANIC LOCK: 9300L X 630 X 630 X RT03 X 630 X HC (THROUGH SEX BOLT MOUNTING)..... DORMA
1 CLOSER: 861107 X 630 X SNB1 X 689 (ADJ. TO 8.5 LBS.) (ROUGH SET FOR MOUNTING)..... DORMA
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... IVES
1 LATCH PLATE: 190S X 8" X 3 3/4" X 630..... HAGER
1 DOOR BOTTOM SWEEP: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 3 (DR. 3)
REQUIRED HARDWARE FURNISHED WITH OVERHEAD DOOR SYSTEM (LOCKING FROM INSIDE ONLY)
SET NO. 4 (DR. 4)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 OFFICE LOCK (LEVER HANDLE): AU530TLN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 5 (DR. 5, 6)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 PRIVACY LOCK (LEVER HANDLE): AU5302LN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 6 (DR. 7)
3 HINGES: BB1191 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 EXIT PANIC LOCK: 9500B X 416 X 630 (EXIT ONLY)..... TELL
1 CLOSER: 5300MLT X FC X SX2 X 689 (ADJ. TO 8.5 LBS.) (THROUGH SEX BOLT MOUNTING)..... HAGER
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... LATCHGUARD
1 DOOR BOTTOM SWEEP: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 2 (DR. 2)
3 HINGES: BB1191 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 CYLINDER: 20-062 X 626 - "E" KEYWAY (REMOVABLE CORE)
PROVIDE (2) SECURITY KEYS: (1) CORE KEY, (1) BITTED..... SCHLAGE
1 EXIT PANIC LOCK: 9300L X 630 X 630 X RT03 X 630 X HC (THROUGH SEX BOLT MOUNTING)..... DORMA
1 CLOSER: 861107 X 630 X SNB1 X 689 (ADJ. TO 8.5 LBS.) (ROUGH SET FOR MOUNTING)..... DORMA
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... IVES
1 LATCH PLATE: 190S X 8" X 3 3/4" X 630..... HAGER
1 DOOR BOTTOM SWEEP: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 3 (DR. 3)
REQUIRED HARDWARE FURNISHED WITH OVERHEAD DOOR SYSTEM (LOCKING FROM INSIDE ONLY)
SET NO. 4 (DR. 4)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 OFFICE LOCK (LEVER HANDLE): AU530TLN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 5 (DR. 5, 6)
3 HINGES: BB1279 X 4 1/2" X 4 1/2" X 626..... HAGER
1 PRIVACY LOCK (LEVER HANDLE): AU5302LN X 626..... YALE
1 WALL BUMPER: 409 X 626..... ROCKWOOD

SET NO. 6 (DR. 7)
3 HINGES: BB1191 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 EXIT PANIC LOCK: 9500B X 416 X 630 (EXIT ONLY)..... TELL
1 CLOSER: 5300MLT X FC X SX2 X 689 (ADJ. TO 8.5 LBS.) (THROUGH SEX BOLT MOUNTING)..... HAGER
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... LATCHGUARD
1 DOOR BOTTOM SWEEP: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

SET NO. 2 (DR. 2)
3 HINGES: BB1191 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
1 CYLINDER: 20-062 X 626 - "E" KEYWAY (REMOVABLE CORE)
PROVIDE (2) SECURITY KEYS: (1) CORE KEY, (1) BITTED..... SCHLAGE
1 EXIT PANIC LOCK: 9300L X 630 X 630 X RT03 X 630 X HC (THROUGH SEX BOLT MOUNTING)..... DORMA
1 CLOSER: 861107 X 630 X SNB1 X 689 (ADJ. TO 8.5 LBS.) (ROUGH SET FOR MOUNTING)..... DORMA
1 SET PERIMETER GASKETS: 12002 X 1116 X LENGTH REQUIRED..... SCHLEGEL
1 LATCH GUARD: LG100Z/SF X 663 (STRAIGHT W/ PIN AND SEX BOLTS)..... IVES
1 LATCH PLATE: 190S X 8" X 3 3/4" X 630..... HAGER
1 DOOR BOTTOM SWEEP: 31321 X 689 X LENGTH REQUIRED..... GLOBAL
1 THRESHOLD: 31206 X 689 X LENGTH REQUIRED..... GLOBAL

DOOR SCHEDULE

MK	DOOR			DOOR HARDWARE			FRAME			DETAILS			FIRE RATING	REMARKS (REFER NOTES)
	SIZE (W x H x D)	TYPE	SWING	MATERIAL	GLAZ. TYPE	SET #	KEYED	TYPE	MATERIAL	HEAD WIDTH	HEAD	JAMB		
1	3'-0" X 7'-0" X 1-3/4"	A	REFER TO FLOOR PLAN	ALUMINUM	1	1	A	1	ALUMINUM		4/A5.2	4/A5.2	5/A5.2	1, 2, 5
2	3'-0" X 7'-0" X 1-3/4"	B	REFER TO FLOOR PLAN	INSULATED METAL		2	A	2	INSULATED METAL		1/A5.1	2/A5.1	5/A5.2 SIM	1, 2, 3
3	6'-0" X 8'-0"	D	SECTIONAL OVERHEAD	INSULATED METAL		3			MANUFACTURER'S STANDARDS		5/A5.1	6/A5.1		1
4	3'-0" X 7'-0" X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		4		2	HOLLOW METAL		7/A5.1	8/A5.1		1, 4
5	3'-0" X 7'-0" X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		5		2	HOLLOW METAL		7/A5.1	8/A5.1		1, 4
6	3'-0" X 7'-0" X 1-3/4"	C	REFER TO FLOOR PLAN	SOLID WOOD		5		2	HOLLOW METAL		7/A5.1	8/A5.1		1, 4
7	3'-0" X 7'-0" X 1-3/4"	B	REFER TO FLOOR PLAN	INSULATED METAL		6		2	INSULATED METAL		3/A5.1	4/A5.1	5/A5.2 SIM	1, 3


NOTES:
1. ALL DOORS SHALL BE SHOP PREPARED FOR HARDWARE.
2. ALL EXTERIOR DOORS TO BE KEYPAD ALIKE. CONTRACTOR TO FIELD VERIFY AND MATCH CORE OF DOOR MARKED "Z".
3. EXTERIOR DOOR, FRAME AND HARDWARE OWNER FURNISHED AND CONTRACTOR INSTALLED. REFER TO SCOPE OF WORK SCHEDULE.
4. CONTRACTOR'S OPTION TO PURCHASE INTERIOR DOORS, FRAMES, AND HARDWARE THROUGH PREFERRED VENDOR. REFER TO SCOPE OF WORK SCHEDULE.
5. PROVIDE SIGN POSTED ON EGRESS SIDE ADJACENT TO DOOR STATING "THIS DOOR TO REMAIN UNLOCKED WHEN THIS SPACE IS OCCUPIED". SIGN CONSTRUCTION TO BE NON-GLARE 1" HIGH WHITE LETTERING ON CONTRASTING BLUE BACKGROUND. LOCATION TO COMPLY WITH ANSI A117.1. MOUNT 48" MINIMUM ABOVE FINISH FLOOR TO BOTTOM OF LOWEST CHARACTER AND 60" MAXIMUM ABOVE FINISH FLOOR TO BOTTOM OF HIGHEST CHARACTER.

LOCKNET
100 COURCHELLE DRIVE
NICHOLASVILLE, KY 40356
CONTACT: PAM PEEL
PHONE 800-887-4307 EXT 133
FAX 859-881-5499
EMAIL: construction@locknet.com

SPECIAL NOTE:
UNLESS OTHERWISE INDICATED, KNOCK DOWN (KD) TYPE DOOR FRAMES ARE NOT PERMITTED.

ALL EXTERIOR DOORS, FRAMES AND HARDWARE SUPPLIED TO WIND-RATED TO COMPLY WITH THE FOLLOWING CRITERIA:
ALLOWABLE STRESS DESIGN (ASD) PRESSURE: 50/50 PSF

DOOR TYPES (SCALE 1/4" = 1'-0")

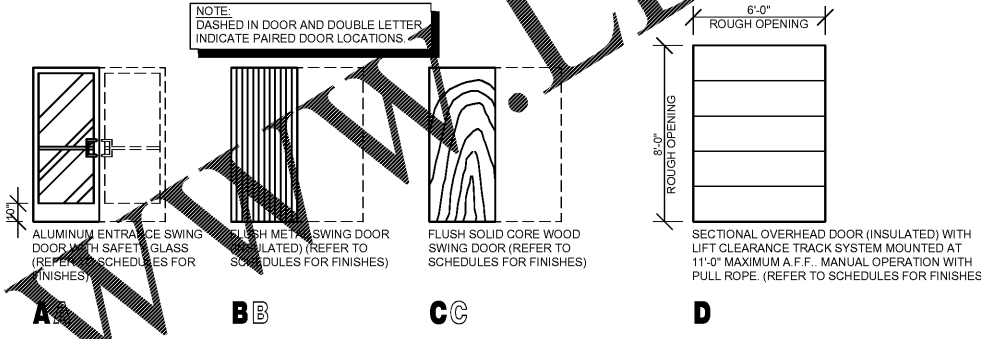

FRAME TYPES (SCALE 3" = 1'-0")

