

**FLOOR PLAN LEGEND**

[Symbol]	8" MTL STUDS W/ R-30 BATT INSULATION. FINISH WITH THIN BRICK AND STONE	[Symbol]	DOOR TAG
[Symbol]	3-5/8" MTL STUDS W/ R11 BATT INSULATION. 1/2" GYPSUM BOARD. U.N.O.	[Symbol]	BLOCKING IDENTIFICATION. SEE EQ. BLOCKING NOTES
[Symbol]	3-5/8" MTL STUDS W/ 1/2" GYPSUM BOARD. U.N.O.	[Symbol]	TACTILE BRILLE SIGN
[Symbol]	3-5/8" MTL STUDS W/ 1/2" GYPSUM BOARD AND 1/2" PLYWOOD ON ELECTR. ROOM SIDE	[Symbol]	STATING EXIT COMPLYING WITH ICCANS A117.1
[Symbol]	8" MTL STUDS W/ 1/2" GYPSUM BOARD. U.N.O.	[Symbol]	FIRE EXTINGUISHER
[Symbol]	INSULATED MTL. PNLS BY REFRIG. CO.	[Symbol]	PROVIDE BLOCKINGS AS REQUIRED & COORDINATE WITH LOCATION OF FIRE MARSHAL
[Symbol]	CONCRETE MASONRY		



- GENERAL NOTES**
1. ALL DIMENSIONS ARE FROM FACE OF PLYWOOD/CMU STEM WALL UNLESS OTHERWISE NOTED.
  2. ALL WALLS BEHIND WALK-IN REFRIGERATORS AND FREEZERS SHALL BE 1/2" DUROCK ON BOARD TO HEIGHT OF 11'-0" A.F.F. FASTENERS TO STUDS @ 8" O.C. EA. WAY W/ DUROCK FASTENERS. EMBED ALKALI-RESISTANT TAPE IN THINSET OVER JOINTS.
  3. PROVIDE 6" PVC TUBE WITH THREADED CAP, 36" IN LENGTH MTD VERTICALLY TO WALL WITH METAL STRAPS, IN ELECTRICAL ROOM AS NOTED.

**EQUIPMENT BLOCKING**

#	ITEM	MAT'L	LOCATION & REMARKS
1	SHELVING @ 3 COMP. SINK	1/2" PLYWD	IN LIEU OF GWB. SEE ELEVATION
2	MOP HOLDER	2" X 6"	5'-8"
3	HAND DRYER	AS PER MFR	
4	HAND WASH SINK	2" X 6"	3'-5"
5	URNAL	AS PER MFR	
6	GRAB BARS	2" X 6"	2'-10" AND VERTICAL
7	TRASH BAG HOLDER	2" X 6"	2'-0" AND 4'-0"
8	TOILET PARTIONS	AS PER MFR	
9	OFFICE SECURITY SHELF	2" X 10"	4'-0" & 8'-0" SEE DETAIL 10A11
10	LOCKERS	2" X 12"	5'-6"
11	FUEL TANK MONITOR	2" X 12"	5'-6"
12	SURGE TANK SHELF	2" X 6"	8'-8" SEE DETAIL 5A11
13	BEER COOLER SIGN	2" X 8"	10'-2" SEE DETAIL 16A11.1
14	FIRE EXTINGUISHER	2" X 6"	3'-6"
15	CSR UNIT	5/8" PLYWD	IN LIEU OF GWB. FLR TO CLG
16	FULL SERVICE CUBBIES	2" X 8" & 2" X 10"	SEE DETAIL 6A11.1
17	COFFEE AREA CUBBIES	2" X 8" & 2" X 10"	SEE DETAIL 7A11.1
18	KPS MONITOR	2X8 (VERT.)	2'-6" UP TO 4'-0"
19	GOOSE LOGO SIGN	2" X 6"	9'-0" & 10'-9". RE: ELEVATION 5A/9
20	3 COMPARTMENT SINK	2" X 12"	2'-11" SEE ELEVATION
21	TRASH RECEPTACLE	AS PER MFR	
22	AIR CURTAIN	2" X 12"	ABOVE DOOR. RE: 8M2

- BLOCKING NOTES**
1. PROVIDE ADDITIONAL BLOCKING AT OTHER LOCATIONS AS REQUIRED.
  2. ALL HEIGHTS ARE CENTERED UNLESS NOTED OTHERWISE.
  3. PROVIDE BLOCKING FOR ALL CABINETS - 2X12, CENTERED ON TOP.

- DOOR NOTES**
1. DOOR #S SHOWN IN DOOR SCHEDULE ARE TYPICAL FOR WAWA STORES. VERIFY QUANTITIES AND WHICH DOORS ARE REQUIRED AS INDICATED IN FLOOR PLAN.
  2. SEE STOREFRONT MFR SPECIFICATIONS FOR VESTIBULE DOORS. DOORS ARE TO BE KEYPAD ALIKE WITH THUMB LATCH AND CLOSER AT ALL DOORS.
  3. ALL EXTERIOR DOORS SHALL BE INSULATED DOORS.
  4. RUN CONTINUOUS BEAD OF CLEAR SILICONE CAULK AROUND ALL DOOR FRAMES.
  5. EXIT DOOR LOCKS, IF PROVIDED ON EGRESS DOORS, SHALL NOT REQUIRE THE USE OF A KEY, A TOOL, OR SPECIAL KNOWLEDGE OR EFFORT FOR OPERATION FROM THE EGRESS SIDE IN ACCORDANCE WITH IBC 2009 & 2012 - SECTION 1008.1.9 OR IBC 2015 1010.1.9 (AS APPLICABLE).
  6. A LATCH OR OTHER FASTENING DEVICE ON AN EGRESS DOOR SHALL BE PROVIDED WITH A KNOB, HANDLE, PANIC BAR, OR OTHER SIMPLE TYPE OF RELEASING DEVICE HAVING AN OBVIOUS METHOD OF OPERATION UNDER ALL LIGHTING CONDITIONS. DOORS SHALL BE OPERABLE WITH NO MORE THAN ONE RELEASING OPERATION PER IBC 2009 & 2012 - SECTION 1008.1.9.5 OR IBC 2015 1010.1.9.5 (AS APPLICABLE).
  7. REFER TO HARDWARE SCHEDULE IN THE SPECIFICATION MANUAL.
  8. ALL GLAZING IN DOORS & SIDELIGHTS SHALL MEET THE REQUIREMENTS FOR SAFETY GLAZING AS REQUIRED IN IBC 2009, 2012 & 2015 - SECTION 2408.
  9. HARDWARE HEIGHTS - HANDLES, PULLS, LATCHES, LOCKS, AND OTHER OPERATING DEVICES ON DOORS SHALL BE INSTALLED, 34" MINIMUM AND 48" MAXIMUM ABOVE THE FINISHED FLOOR.
  10. ACROVYN DOORS SHALL BE INSTALLED IN H.M. FRAMES PER SPECIFICATIONS. DOORS SHALL HAVE ACROVYN COVERING FACTORY APPLIED.
  11. ALL FRAMES FOR ACROVYN DOORS SHALL BE GECO DOOR PRODUCTS, NO SUBSTITUTIONS. H.M. FRAMES FOR ACROVYN DOORS SHALL BE ORDERED THRU WILLIAM MCAULIFFE, III ACH. SEE SPECIFICATIONS. FRAMES SHALL HAVE ACROVYN COVERING FIELD APPLIED.
  12. THRESHOLD IS NOT TO EXCEED 1/2" HIGH INSTALLED.
  13. ALL DOORS, INTERIOR AND EXTERIOR SHOULD BE FULLY WEATHERED AND FRAMES ADD WOOD BLOCKING AROUND THE FRAMES. SEE DETAILS 9 AND 10A11.2.

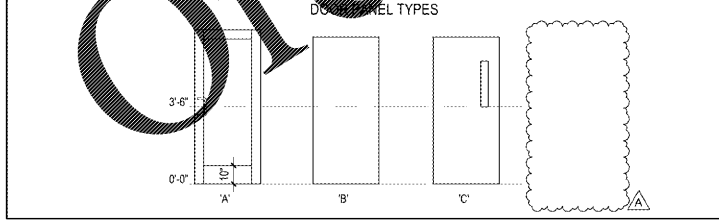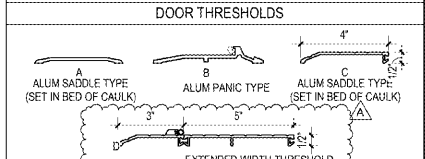

**DOOR PANEL TYPES**

#	W	H	THK	TYPE	MAT'L	FRM	TH	RD	HOW	REMARKS	PUSH	PULL
C6	2'-0"	6'-8"	1-3/4"	B	WD	HM	HW14	B	HW14	BABCOCK DAVIS BNT - CUSTOM HARDWARE CONFIGURATION	LOCKSET	
CC	3'-0"	7'-0"	1-3/4"	B	HM	HM	B	HW9	B	SEE DETAIL 15A/8		
CD	4'-0"	7'-0"	1-3/4"	C	HM	HM	A	HW10	B	4"X26" SAFETY GLASS VISION PANEL. SEE DETAIL 15A/8	PANIC BAR	36"X46"
EL	3'-0"	6'-8"	1-3/4"	E	HM	HM	C	HW13	B	4"X26" SAFETY VISION PNL. SEE DETAIL 9 AND 10A11.2	PANIC BAR	
V2	3'-0"	7'-0"	1-3/4"	A	ALUM	ALUM	C	HW12	B	4"X26" SAFETY GLASS VISION PANEL. SEE DETAIL 15A/8	PANIC BAR	
EX	3'-0"	7'-0"	1-3/4"	C	HM	HM	B	HW2	B		PANIC BAR	

**DOOR SCHEDULE**

#	W	H	THK	TYPE	MAT'L	FRM	TH	RD	HOW	REMARKS	PUSH	PULL
OF	3'-0"	6'-8"	1-3/4"	C	WD	HM	HW12	B	HW12	4"X26" ONE-WAY VISION GLASS PNL. SEE NOTES 10 & 11. SEE DETAIL 9A11.2	LOCKSET	16"X34"
PT	3'-0"	6'-8"	1-3/4"	B	WD	HM	HW7	B	HW7	SEE NOTES 10 & 11. SEE DETAIL 9A11.2	24"X24"	16"X34"
R	3'-0"	6'-8"	2"	-	-	-	-	-	-	BY REF. CO.		
R1	3'-0"	6'-8"	2"	-	-	-	-	-	-	BY REF. CO.		
R2	4'-0"	6'-8"	2"	-	-	-	-	-	-	BY REF. CO.		
R3	3'-0"	6'-8"	2"	-	-	-	-	-	-	BY REF. CO.		
V2	3'-0"	7'-0"	1-3/4"	A	ALUM	ALUM	C	-	-	NO HOLD OPENS (DBL DOOR)	PUSH BAR	
V4	3'-0"	7'-0"	1-3/4"	A	ALUM	ALUM	C	-	-	NO HOLD OPENS	PUSH BAR	

**DOOR PANEL TYPES**

#	W	H	THK	TYPE	MAT'L	FRM	TH	RD	HOW	REMARKS	PUSH	PULL
W	3'-0"	6'-8"	1-3/4"	C	WD	HM	HW3	B	HW3	4"X26" ONE-WAY VISION GLASS PNL. SEE NOTES 10 AND 11. SEE DETAIL 9A11.2	5'X16"	16"X34"

**WAWA**  
280 W. BALTIMORE PIKE  
HENRICCO, VA

**PROJECT NAME**  
U45-VA V2018.01-MA  
STORE #8647-PHM  
PARRHAM RD. & THREE CHOPT RD.  
HENRICCO, VA

**CLIENT NAME**  
WAWA

**DATE**  
09/21/2018  
01/28/2019  
01/28/2019

**NO.**  
PERMIT SET  
REV V2018.01  
BID SET

**DESCRIPTION**  
REV V2018.01  
BID SET

**REVISION SCHEDULE**

No.	Description	Date
1	PERMIT SET	09/21/2018
2	REV V2018.01	01/28/2019
3	BID SET	01/28/2019

**PROJECT NO.**  
2180130

**DATE**  
09-21-2018

**DRAWN**  
OR

**CHECKED**  
RS

**PROJECT NO.**  
2180130

**DATE**  
09-21-2018

**DRAWN**  
OR

**CHECKED**  
RS

**PROJECT NO.**  
2180130

**DATE**  
09-21-2018

**DRAWN**  
OR

**CHECKED**  
RS

**PROJECT NO.**  
2180130

**DATE**  
09-21-2018

**DRAWN**  
OR

**CHECKED**  
RS



**Order Plans**