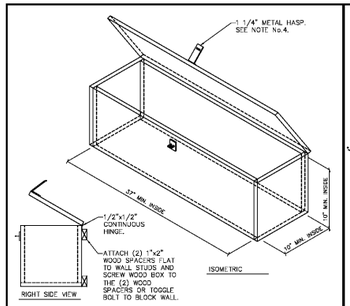

NOTES:

1. BOX TO BE CONSTRUCTED OF 3/4" PRE-FINISHED PLYWOOD OR MDF OR 3/4" CABINET GRADE PLYWOOD OR MDF WITH ONE COAT OF URETHANE.
2. GLUE ALL JOINTS AND NAIL AS NECESSARY W/ 6D FINISH NAILS TO MAKE BOX STURDY.
3. ROUND OFF SHARP CORNER EDGES.
4. CENTER 1 1/4" METAL HASP ON BOX AS SHOWN.
5. INSTALL BOX TOP SURFACE 44" ABOVE FINISH FLOOR.
6. INSTALL PLAN BOX ON BUILDING WALL IN SPRINKLER RISER CAGE OR OTHER LOCATION DETERMINED BY KROGER PROJECT MANAGER.

BUILDING PLAN STORAGE BOX	DATE: 7/23/12 SCALE: NONE DRAWN: ZMF
MASTER SPECIFICATION DETAIL	GISD-24

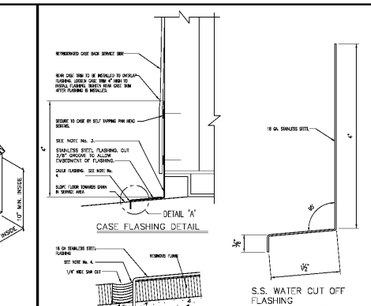

NOTES:

1. FOR CASES THAT DO NOT HAVE A REMOVABLE KICK PANEL, ATTACH THE FLASHING TO THE BACK OF THE CASE AND CAULK ALONG THE TOP.
2. CUT 1/4" MDF GROOVE FOR FLASHING PARALLEL TO AND IN THE REAR OF CASES TO ENSURE PROPER INSTALLATION.
3. WHERE FLASHING PIECES BUTT TOGETHER CAULK JOINT WITH SILICON SEALANT TO PREVENT EXPOSED.
4. CAULK JOINT WHERE FLASHING SITS IN RESILIENCE FLOOR JOINT WITH POLYMER CAULK TO MATCH COLOR.

STAINLESS STEEL WATER CUT OFF FLASHING	DATE: 7/14/15 SCALE: NONE DRAWN: ZMF/TMR
MASTER SPECIFICATION DETAIL	GISD-14

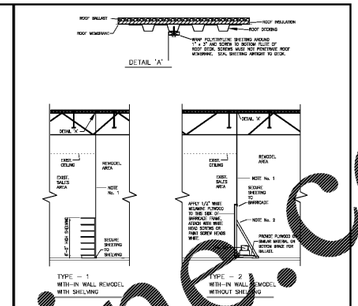

NOTES:

1. 2-HR. FIRE RATED DRYWALL CONSTRUCTION AT CEILING AND WALLS AS REQUIRED BY LOCAL CODE. CONTRACTOR TO VERIFY REQUIREMENTS WITH LOCAL AUTHORITIES.
2. ALL 4" WOOD STUDS TO BE SOLIDLY BLOCKED AT 16" O.C. VERTICALLY WITH 2"x4" BLOCKING.
3. ALL 4" WOOD STUDS TO BE SOLIDLY BLOCKED AT 16" O.C. VERTICALLY WITH 2"x4" BLOCKING.

TEMPORARY CONSTRUCTION BARRIERS	DATE: 06-01-07 SCALE: NONE DRAWN: DS/AD
MASTER SPECIFICATION DETAIL	ASD-162A

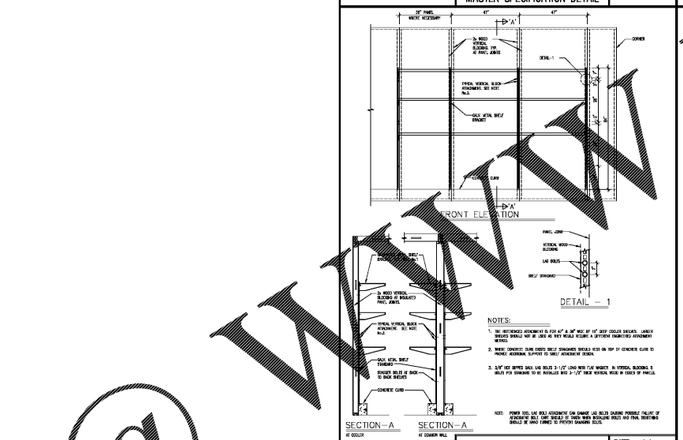

NOTES:

1. THE REFERENCED ASSEMBLY IS FOR 84" H. OR 96" H. DOUBLE DOOR COOLERS AND FREEZERS. LARGER HEIGHTS SHOULD NOT BE USED AS THEY WOULD REQUIRE A DIFFERENT ENGINEERED ATTACHMENT METHOD.
2. WHERE SHELVES RUN OVER DOOR OPENINGS SHELVES MUST BE ON TOP OF DOOR OR CLEAR TO PREVENT INTERFERENCE WITH DOOR OPERATION.
3. 3/8" HEX BOLTS SHALL BE USED 3 1/2" LONG WITH FLAT WASHERS. IN STEEL BUILDINGS, BOLTS FOR ATTACHMENT TO BE INSTALLED INTO 3" THICK STEEL VERTICAL MEMBERS IN CORES OF PANELS.

NOTE: POWER FEED, LINE VOLT ATTACHMENT OR DRAINAGE LINE BELOW CAUSING POSSIBLE FAILURE OF ATTACHMENT BOLT. CARE SHOULD BE TAKEN WHEN DRILLING HOLES AND FINAL SHELVING SHOULD BE LEVEL CORRECT TO PREVENT DRAINING LIQUID.

COOLER, FREEZER & PREP ROOM SHELVING INSTALLATION DETAIL	DATE: 5/7/14 SCALE: NONE DRAWN: ZMF
MASTER SPECIFICATION DETAIL	GISD-16A

NOTES:

1. TO BE USED WHERE FAUCETS ARE INDICATED.

CASE TOP HOSE BIBB BRACKET	DATE: 3/6/17 SCALE: NONE DRAWN: ZMF
MASTER SPECIFICATION DETAIL	GISD-3B

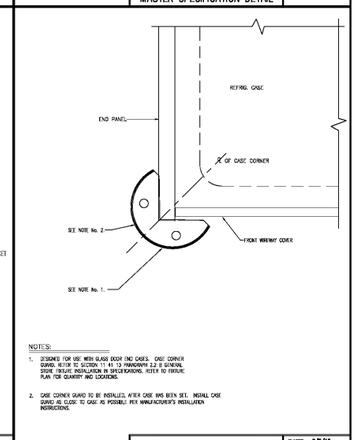

NOTES:

1. DESIGNED FOR USE WITH GLASS DOOR END CASES. CASE CORNER GUARD, REFER TO SECTION 11 41 13 MANUFACTURER'S 2.2 B GENERAL STORE TRAILER INSTALLATION IN SPECIFICATIONS. REFER TO FIXTURE PLAN FOR QUANTITY AND LOCATIONS.
2. CASE CORNER GUARD TO BE INSTALLED, AFTER CASE HAS BEEN SET. INSTALL CASE GUARD AS CLOSE TO CASE AS POSSIBLE PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.

Note:
Detail Based On Installation Instructions From National Cart Co. 5000001.
Legend Number 0730CS. Height 13".

GLASS DOOR END CASE CORNER GUARD	DATE: 5/5/15 SCALE: NONE DRAWN: ZMF
MASTER SPECIFICATION DETAIL	ASD-160A

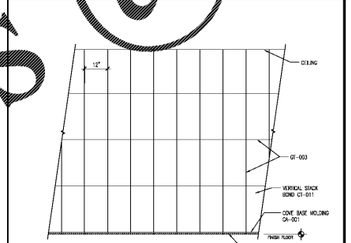

RESTROOM WALL TILE PATTERN, TYPICAL ELEVATION

SCALE: 1/2" = 1'-0"

GI-011

GI-010

CA-001: PVC COVE BASE MOLDING.

NOTES:

1. FLOOR TILE TO BE GI-010 (RUNNING BOND PATTERN)
2. FLOOR GROUT: GI-002 1/8" MORTAR
   WALL GROUT: GI-003 1/8" MORTAR

RESTROOM WALL TILE PATTERN	DATE: 5/18/18 SCALE: NONE DRAWN: ZMF
MASTER SPECIFICATION DETAIL	GID-1

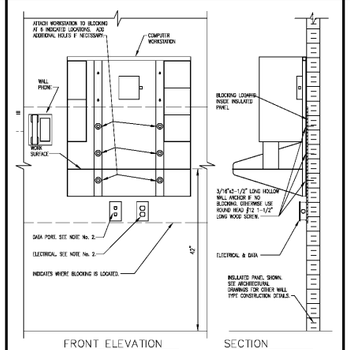

NOTES:

1. SECURELY ATTACH ALL ITEMS TO WALL. METHOD OF ATTACHMENT BASED ON WALL TYPE CONSTRUCTION.
2. FIELD ELECTRICAL & DATA INSIDE STUD WALL.
3. SURFACE MOUNT CONDUIT FOR ELECTRICAL AND DATA ON INSULATED PANELS OR MASONRY WALL CONSTRUCTION.

WALL MOUNTED COMPUTER WORKSTATION	DATE: 3/5/14 SCALE: NONE DRAWN: ZMF
MASTER SPECIFICATION DETAIL	GISD-15A

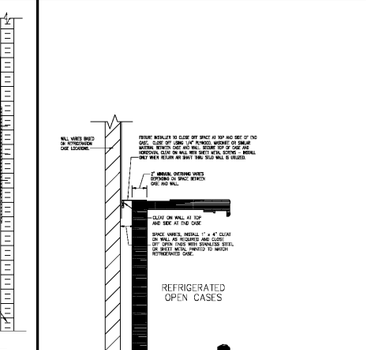

NOTE: CLOSE OFF MATERIAL SHOULD FIT FLUSH TO CASE AND WALLS TO AVOID AIR LEAKAGE.

CASE TOP CLOSE OFF SPACE BETWEEN CASE AND WALL	DATE: 3/6/17 SCALE: NONE DRAWN: ZMF
MASTER SPECIFICATION DETAIL	GISD-2

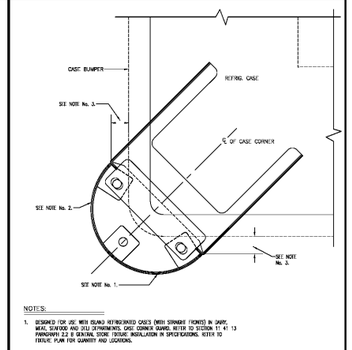

NOTES:

1. DESIGNED FOR USE WITH ISLAND REFRIGERATED CASES (WITH STANDARD FRONTAGE IN SHAPE, METAL STAMPED AND FILL DIMENSIONS). CASE CORNER GUARD, REFER TO SECTION 11 41 13 MANUFACTURER'S 2.2 B GENERAL STORE TRAILER INSTALLATION IN SPECIFICATIONS. REFER TO FIXTURE PLAN FOR QUANTITY AND LOCATIONS.
2. CASE CORNER GUARD TO BE INSTALLED, AFTER CASE HAS BEEN SET. INSTALL CASE GUARD AND FLANGE EXTENSIONS AS CLOSE TO CASE AS POSSIBLE PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.
3. WOODEN 1" PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.
4. FOR CASES WITH SHALLOW TOE KICK IT MAY BE NECESSARY TO FIELD CUT FLANGE FOR PROPER POSITIONING OF GUARD.

Note:
Detail Based On Installation From National Cart Co. 4850008 1900000 And 2600010.

REFRIGERATED CASE CORNER GUARD	DATE: 5/5/15 SCALE: NONE DRAWN: ZMF
MASTER SPECIFICATION DETAIL	ASD-160

Order Plans @ WWW.PBLine.com

CAPSTONE
2211 WILLIAM WAY
SUITE 220
FT. MYERS, FL 33901
ARCHITECT
JOHN MARK HUGHES
Lic. NO. 0401 014156
ARCHITECT
SEAL
2-25-2019
CAPSTONE
CAPSTONE PROJECT SERVICES, PLC
ARCHITECTURAL & CONSTRUCTION SERVICES
OFFICE LOCATIONS ROANOKE, VA - FT. MYERS, FL

A REMODEL FOR:
KROGER R-322
915 HARDY ROAD LAKE DRIVE S/C
VINTON, VA

PROJECT #CPS

02-22-2019
CONSTRUCTION SET
DATE

KROGER STANDARD DETAILS
SHEET TITLE

REVISIONS △

MARK	DATE	DESCRIPTION

PROJECT NO: CPS2017-68.4
CAD DWG FILE: CPS2017-68.4-A5.2
DRAWN BY: CAS
CHK'D BY: JMHLEN

A5.2
SHEET NO.