NEXTGEN INTERIOR FINISHES				NOTE: SEE FINISH PLAN SHEET
SYMBOL	ITEM	MANUFACTURER	SPECIFICATION AND COLOR	NOTES
C-1	CARPET TILE FLOORING	PATCRAFT CONTACT: J.J. TERZION (614) 582-8751 JOSEPH.TERZIGNI@PATCRAFT.COM	STYLE: #43JPC COLOR: 522 SIZE: 24" x 24" INSTALLATION: ASHLAR PATTERN BACKER: ECOLOGIC INTERIOR FLOOR FINISH: RADIANT FLUX: CLASS I	CARPET IS PROVIDED BY VERIZON AND INSTALLED BY THE GC
M-2	ENTRANCE MATTING	IMPACT SPECIALTIES CONTACT: MICHELLE BUEHLER MBUEHLER@IMPACTSPECIALTIES.COM PHONE: (570) 419-0529	HELIX Z2 TILE (WITH CARPET TREAD INSERT) TILE SIZE: 12" x 8" x 7/16" MAT SIZE: 8' x 10' AND 6' x 6' TILE COLOR: BLACK CARPET TREAD INSERT COLOR: WROUGHT IRON BORDER MODEL: HELIX Z1 TILE (WITHOUT CARPET TREAD INSERT) TILE COLOR: BLACK TILE/MODULE THICKNESS: 7/16" ASTM-E648, CLASS I, CRITICAL RADIANT FLUX, MINIMUM 0.45 WATT/CM²	Z1 TILE TO BE USED ADJACENT TO STOREFRONT ENTRANCE AND WITHIN VESTIBULES AS BORDER w/Z2 TILE. TILE TO BE PROVIDED BY VERIZON AND INSTALLED BY GC
V-2	LUXURY VINYL TILE	PORTICO SYSTEMS CONTACT: MIKE BEDFORD 102 TRADE STREET GREER, SC 29651 CELL (813) 208-4974 OFFICE (800) 241-4676 FAX (952) 470-4522 mbedford@portico-systems.com WWW.PORTICOSYSTEMS.COM	NATURES VIEW COLLECTION COLOR: GREY ONYX FINISH: 022COAT+ TECHNOLOGY ANTI-BACTERIAL, ANTI-FUNGAL NO WAX & NO BUFF PROTECTION SIZE: 36" x 36" x 2.5MM THICKNESS WITH 28 MIL WEAR LAYER FIRE RATING: CLASS 1	LUXSEY VINYL TILE IS PROVIDED/INSTALLED BY THE GC
CTF-1	CERAMIC TILE FLOORING	AMERICAN OLEAN NEOSPECK CONTACT: STU KINNEY STU@FAITHEONTILE.COM (972) 360-9774	PRODUCT - NEOSPECK COLOR: DARK GRAY NEOS SIZE: 12"X24" - THICKNESS: 3/8" FINISH: UNPOLISHED, JOINTS 1/8" WIDE GROUT: LATICRETE SPECTRALOCK PRO, COLOR NO. 45 "RAVEN"	TILE IS PROVIDED/INSTALLED BY THE GC
VB-1	RESILIENT WALL BASE	JOHNSONITE CONTACT: THERESA THOMAS (440) 708-5519 THERESA.THOMAS@TARKETT.COM	JOHNSONITE MASQUERADE VIEWPOINT WALL BASE SIZE: 4" HIGH x 3/8" THICK COLOR: JOHNNY 69 V STERLING SILVER420 FIRE RESISTANCE: ASTM E84-NFPA 225 FLAME/SMOKE -CLASS A (ESS THAN 450) NOTE: USE NATIONAL PROGRAM # 10558 WHEN ORDERING	MITRE CUT THE EADS AT INSIDE AND OUTSIDE CORNERS
CTB-1	CERAMIC TILE BASE	AMERICAN OLEAN NEOSPECK CONTACT: STU KINNEY STU@FAITHEONTILE.COM (972) 360-9774	PRODUCT - NEOSPECK COLOR: DARK GRAY NEOS SIZE: 6"x12" P-360TRB FINISH: UNPOLISHED, JOINTS 1/8" WIDE GROUT: LATICRETE SPECTRALOCK PRO, COLOR NO. 45 "RAVEN"	
FRP-1	ACRDYN	CONSTRUCTION SPECIALTIES CONTACT: LEIGH ELLERBEE PH: (888) 424-80357 LELLERBEE@c-sgroup.com	COLOR: # 1407 "WINTER STANCE" TEXTURE: SUEDE THICKNESS: .060 THICKNESS SHEET SIZE: 4'-0" x 8'-0"	TOP OF ACRDYN TO BE INSTALLED @ 52" A.F.F.
C1	OPEN CEILING	BENJAMIN MOORE	PAINTED EXPOSED STRUCTURE, HANGER, FASTENERS, PIPING AND MECHANICAL SYSTEMS CEILING PAINT FINISH: PAINT P-1	
C1-K13	OPEN CEILING	INTERNATIONAL CELLULOSE CORPORATION	K-13 THERMAL AND ACOUSTICAL FINISH COLOR: WHITE APPLIED THICKNESS: 1.5" FIRE RATING: CLASS 1, CLASS A	ALL CLIPS, HANGERS, SUPPORTS, SLEEVES AND OTHER ATTACHMENTS FOR ALL DUCTS, LIGHTING, ETC. TO SPRAY BASES ARE TO BE PLACED PRIOR TO THE APPLICATION OF THE SPRAY SYSTEM. PAINT ALL SUCH ELEMENTS WITH (2) COATS OF P-1 (BENJAMIN MOORE DC-149) BEFORE SPRAY APPLICATION. ALL INTERIOR WALLS SHALL BE SANDED AND READY FOR PAINTED FINISH TO PREVENT DUST. EXISTING JOISTS, GIRDERS, ETC. SHALL BE PAINTED (ITEM C1). INSTALL SPRAY INSULATION AS PER MANUFACTURERS REQUIREMENTS. CONTRACTOR SHALL PAINT EXPOSED METAL DECK WITH RUST INHIBITOR PRIOR TO APPLICATION OF ACOUSTICAL SPRAY. CONTRACTOR SHALL PREPARE AND READY EXISTING SURFACE AS REQUIRED PER MANUFACTURER'S REQUIREMENTS.
C2	GYPSUM BOARD CEILING	BENJAMIN MOORE	GYPSUM BOARD CEILING: SEE FINISH SCHEDULE	
C3	ACOUSTICAL CEILING TILE	ARMSTRONG CONTACT: MAUREEN CONE PH: (717) 397-0611 x 2721 MMCONE@ARMSTRONG.COM	ARMSTRONG "ULTIMA" 1910 - 24" x 24" x 3/4" EDGE PROFILE: 15/16" SQUARE LAY-IN COLOR: WHITE GRID: PRELUDE XL 15/16" EXPOSED TEE IN WHITE FIRE RATING: CLASS A	
C4	ACOUSTICAL CEILING TILE	ARMSTRONG CONTACT: MAUREEN CONE PH: (717) 397-0611 x 2721 MMCONE@ARMSTRONG.COM	ARMSTRONG "FINE FISSURED" 1729 - 24" x 48" x 5/8" EDGE PROFILE: 15/16" SQUARE LAY-IN COLOR: WHITE GRID: PRELUDE XL 15/16" EXPOSED TEE IN WHITE FIRE RATING: CLASS A	
L-1	PLASTIC LAMINATE	WILSONART CONTACT: (800) 433-5222	COLOR: "FASHION GREY" #3381-60 FINISH: MATTE FIRE RATING: CLASS 1 OR TYPE 604, 605, AND 607	
CG-1	CORNER GUARD	IMPACT SPECIALTIES MBUEHLER@IMPACTSPECIALTIES.COM	COLOR: "VIVID WHITE" PRODUCT: VA-034 SERIES 10'-0" FULL HEIGHT FIRE RATING: CLASS A	ORDERED THROUGH IMPACT AND INSTALLED BY GENERAL CONTRACTOR
CG-2	CORNER GUARD	IMPACT SPECIALTIES MBUEHLER@IMPACTSPECIALTIES.COM	COLOR: "STORM GRAY" PRODUCT: VA-034 SERIES 10'-0" FULL HEIGHT FIRE RATING: CLASS A	ORDERED THROUGH IMPACT AND INSTALLED BY GENERAL CONTRACTOR

PAINT COLORS - BENJAMIN MOORE	
P-1	MANUFACTURER: BENJAMIN MOORE PRODUCT LINE: ULTRA SPEC, SCUFF X COLOR: OC-149 "DECORATOR'S WHITE" FINISH: SEE PAINT NOTES BELOW LOCATION: FRONT OF HOUSE WALLS
P-1c	MANUFACTURER: BENJAMIN MOORE PRODUCT LINE: REGAL SELECT COLOR: OC-149 "DECORATOR'S WHITE" FINISH: SEE PAINT NOTES BELOW LOCATION: FRONT OF HOUSE CEILING
P-2	MANUFACTURER: BENJAMIN MOORE PRODUCT LINE: ULTRA SPEC, SCUFF X COLOR: 1616 "STORMY SKY", COLOR PREVIEW FINISH: SEE PAINT NOTES BELOW LOCATION: FRONT OF HOUSE ACCENT WALL (COOL GREY 10)
P-3	MANUFACTURER: BENJAMIN MOORE PRODUCT LINE: REGAL SELECT COLOR: AC-16 05 "WINTER SOLSTICE", COLOR PREVIEW FINISH: EGGSHELL ON WALLS, SEMI-GLOSS ALKYD ON DOORS & FRAMES LOCATION: BACK OF HOUSE (COOL GREY 4)
P-4	MANUFACTURER: BENJAMIN MOORE PRODUCT LINE: REGAL SELECT COLOR: PM-4 "BRILLIANT WHITE", COLOR PREVIEW FINISH: SEE PAINT NOTES BELOW LOCATION: BACK OF HOUSE CEILINGS

PAINT NOTES

TYPICAL APPLICATION AND INSTALLATION

WALLS: EGGSHELL ON WALLS AND SOFFITS
DOORS & FRAMES: SEMI GLOSS ALKYD
CEILING: MATTE LATEX

NOTE: ADD BONDING PRIMER FOR METAL

FRONT OF HOUSE CEILING:
PAINT ALL WIRES, RETURN AIR GRILLES, SUPPLY AIR GRILLES AND DUCTS TO MATCH ADJACENT CEILING AREA.

GYPSUM BOARD:
GYPSUM BOARD RECEIVING LATEX PAINT SHALL BE PRIMED WITH ONE (1) COAT OF VINYL PLASTIC SEALER PRIOR TO RECEIVING TWO (2) COATS OF FINISH PAINT.

WOOD ITEM:
WOOD TRIM RECEIVING ALKYD OR ENAMEL PAINT SHALL BE PRIMED WITH ONE (1) COAT OF ENAMEL UNDERCOATER PRIOR TO RECEIVING TWO (2) COATS OF PAINT.

BENJAMIN MOORE CONTACT:
MICHAEL ECKE
T: (201) 949-6130 C: (201) 783-7698
MICHAELECKE@BENJAMINMOORE.COM

ROOM FINISH SCHEDULE

ROOM #	ROOM NAME	FLOOR	BASE	WALL	CEILING	CABINETS	COUNTERTOP	COMMENTS
101	RETAIL SALES	V-2, M-2	VB-1	P-1, P-2	C-1, C-4	-	-	
102	HALL	V-2	VB-1	P-1, P-2		-	-	
103	OPERATIONS	C-1	VB-1	P-3		L-1	L-1	
104	MANAGER	C-1	VB-1	P-3		-	-	
105	STORAGE	C-1	VB-1	P-3	C3	-	-	
106	BREAK AREA	C-1, CTF-1	VB-1, CTB-1	P-3, FRP-1	C3	L-1	L-1	TOP OF FRP-1 TO BE INSTALLED @ 52" A.F.F., PAINT WALLS P-3 ABOVE FRP-1
107	JANITOR	CTF-1	CTB-1	P-3, FRP-1	C2 (P-4)	-	-	TOP OF FRP-1 TO BE INSTALLED @ 52" A.F.F., PAINT WALLS P-3 ABOVE FRP-1
108	HALL	C-1	VB-1	P-3	C3	-	-	
109	ELEC/TELCO	CTF-1	CTB-1	P-3	C3	-	-	
110	INVENTORY	C-1	VB-1	P-3	C3	-	-	
111	EXT. WOMEN	CTF-1	CTB-1	P-3, FRP-1	C2 (P-4)	L-1	-	TOP OF FRP-1 TO BE INSTALLED @ 52" A.F.F., PAINT WALLS P-3 ABOVE FRP-1
112	EXT. MEN	CTF-1	CTB-1	P-3, FRP-1	C2 (P-4)	L-1	-	TOP OF FRP-1 TO BE INSTALLED @ 52" A.F.F., PAINT WALLS P-3 ABOVE FRP-1
113	HALL	C-1	VB-1	P-3	C3	-	-	

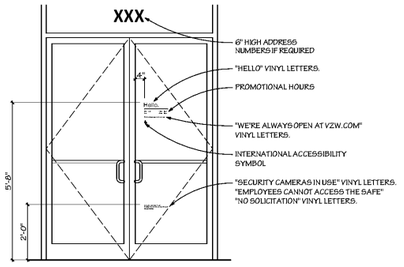

NOTE: VIEW OF ENTRANCE DOORS FROM EXTERIOR

1 ENTRANCE DOOR SIGNAGE DETAIL

SCALE: 1/2" = 1'-0"



NOTE: VIEW OF DOOR FROM EXTERIOR

2 SECURITY SIGNAGE

SCALE: 1/2" = 1'-0"

GENERAL NOTES
THIS SHEET ONLY

1. ADDITIONAL SIGNAGE MAY BE REQUIRED BY REGION-COORDINATE WITH VERIZON PROJECT MANAGER.
2. TO ORDER VISUAL GRAPHIC SYSTEMS SIGNAGE CONTACT: ARLETTE DAVIS ADAVIS@VGS-INC.COM (800)203-0501 EXT. 109
3. ALL VINYL SIGNAGE APPLIED TO INSIDE FACE OF STOREFRONT u.n.o.
4. REFER TO TYPICAL SIGNAGE DETAILS ON SHEET 10.02 FOR ADDITIONAL INFORMATION.

DOOR SCHEDULE

DOOR NO.	ROOM NUMBER & NAME	SIZE	DOOR STYLE	DOOR MATERIAL	DOOR FINISH	FRAME MATERIAL	FRAME FINISH	HEAD & JAMB DETAIL	RATING	HARDWARE LOCKSET	FLOOR STOP	CLOSER	KICK-PLATE	ELECTRIC STRIKE	DOOR POSITION CONTACT	CARD READER	COMMENTS
101A	101 RETAIL SALES	(2) 3'-0" x 7'-0" x 1 3/4"	BB	ALUMINUM & GLASS	MATCH EXISTING	ALUMINUM	MATCH EXISTING	-	NONE	PANIC-1	NO	YES	NO	NO	YES	YES	A, E, CLOSER SHALL BE BY YOOD HARDWARE, BY OTHERS. SUPPLIED WITH SURFACE MOUNTED BOTTOM WEATHERSTRIP WITH FLEXIBLE BLADE SWEEP FIELD APPLIED. ALL HARDWARE INFILTRATION AND PRODUCT APPROVAL REQUIREMENTS
102B	102 HALL	3'-0" x 7'-0" x 1 3/4"	AA	STEEL, INSULATED	PAINT	H.M.	PAINT	2&3/3.01.01	NONE	PANIC-2	NO	YES	YES	NO	NO	NO	A, D, E, SUPPLIED WITH ONLY
103A	103 OPERATIONS	3'-0" x 7'-0" x 1 3/4"	CC	WOOD SOLID CORE & GLASS	PAINT	H.M.	PAINT	4/3.1.01	NONE	ENTRY-2	YES	YES	YES	YES	YES	YES	WITH 5" x 35"H VERT ITEMS USED AND ENTRY READER. CARD READER SUPPLIED BY VERIZON. REQUEST TO EXIT (REX) MOTION DETECTOR: BOSCH DS160 TO BE SUPPLIED BY GC.
104	104 MANAGER	3'-0" x 7'-0" x 1 3/4"	AA	WOOD SOLID CORE	PAINT	H.M.	PAINT	4/3.1.01	NONE	ENTRY-1	YES	YES	YES	NO	NO	NO	A, C, D
105A	105 STORAGE	3'-0" x 7'-0" x 1 3/4"	AA	WOOD SOLID CORE	PAINT	H.M.	PAINT	4/3.1.01	NONE	ENTRY-1	YES	YES	YES	NO	NO	NO	A, C, D
107A	107 JANITOR	3'-0" x 7'-0" x 1 3/4"	AA	WOOD SOLID CORE	PAINT	H.M.	PAINT	4/3.1.01	NONE	ENTRY-1	YES	NO	YES	NO	NO	NO	A, C, D
108	108 HALL	3'-0" x 7'-0" x 1 3/4"	AA	STEEL, INSULATED	PAINT	H.M.	PAINT	2&3/3.01.01	NONE	PANIC-2	NO	YES	YES	NO	NO	YES	A, E, B, DOOR SHALL BE EQUIPPED WITH PANIC BAR HARDWARE, BY OTHERS.
109A	109 ELEC/TELCO	3'-0" x 7'-0" x 1 3/4"	AA	WOOD SOLID CORE	PAINT	H.M.	PAINT	4/3.1.01	NONE	ENTRY-2	NO	YES	YES	YES	YES	YES	A, C, D, WITH HINGE PIN DOOR STOP
110A	110 INVENTORY	3'-0" x 7'-0" x 1 3/4"	AA	STEEL	PAINT	H.M.	PAINT	4/3.1.01	NONE	PRIVACY-1	NO	YES	YES	YES	YES	NO	A, C, D, WITH HINGE PIN DOOR STOP
111A	111 EXT. WOMEN	3'-0" x 7'-0" x 1 3/4"	AA	WOOD SOLID CORE	PAINT	H.M.	PAINT	4/3.1.01	NONE	PRIVACY-1	NO	YES	YES	NO	NO	NO	A, C, D
112A	112 EXT. MEN	3'-0" x 7'-0" x 1 3/4"	AA	WOOD SOLID CORE	PAINT	H.M.	PAINT	4/3.1.01	NONE	PRIVACY-1	NO	YES	YES	NO	NO	NO	A, C, D, HINGE PIN DOOR STOP

COMMENT KEY
A. LOCKSET SHALL BE OPERATED FROM EITHE INTERIOR SIDE WITHOUT ANY SPECIAL KNOWLEDGE, EFFORT OR KEY.
B. EXISTING DOOR
C. HARDWARE SHALL BE STANDARD CYLINDRICAL LATCH TYPE WITH LEVER HANDLES
D. ALL FRAMED SHALL BE SHOP PRIMED AND FIELD FINISHED WITH SEMIGLOSS ENAMEL.
E. WEATHER-STRIPPED

NOTE: CONTRACTOR TO COORDINATE INVENTORY DOOR SECURITY LOCKING WITH VERIZON PROJECT MANAGER AND SECURITY VENDOR.

DOOR STYLE KEY
AA FLUSH DOOR
BB ALUMINUM AND GLASS ENTRY DOOR
CC FLUSH DOOR WITH 5" x 35" TWO-WAY MIRROR GLASS VISION PANEL



FRAME TYPE
KNOCK DOWN HOLLOW METAL FRAME (JAMED YERO) FULLY WELDED 16 GAUGE HOLLOW METAL FRAME (ALL OTHERS)
FRAMED OPENING WITH NO STOP.

CONTRACTOR TO VERIFY ALL DOOR HARDWARE WITH VERIZON PROJECT MANAGER PRIOR TO BID SUBMISSION

DOOR SCHEDULE GENERAL NOTES
1. REFER TO ARCHITECTURAL DRAWINGS (SHEET A-3.0 AND SC-3.0) FOR ADDITIONAL INFORMATION.
2. ALL DOORS SHALL BE PROVIDED WITH "BEST-LOCK" 7-PIN SMALL FORMAT INTERCHANGEABLE, HIGH-SECURITY DRILL RESISTANT CORES.
3. KEY ALL EXTERIOR DOORS TO ONE MASTER KEY.
4. KEY ALL INTERIOR DOORS TO ONE MASTER KEY.
5. LOCKSETS SHALL BE SCHLAGE MODEL ND53PD RHODES (LEVER HANDLES) FINISH SHALL BE BRIGHT CHROME PLATED - UNLESS OTHERWISE NOTED.
6. DOOR HANDLES & LOCKSETS TO BE PROVIDED BY SECURITY VENDOR. ALL OTHER DOOR HARDWARE TO BE PROVIDED BY GC.
7. ALL FRAMES SHALL HAVE RUBBER SILENCERS, WHICH ARE TO BE INSTALLED AFTER FINAL PAINTING. SILENCERS SHALL BE SUPPLIED BY DOOR MANUFACTURER COMPANIES (800) 325-9995.
8. ALL DOOR TRIM AND FINISH SHALL BE US32D UNLESS NOTED OTHERWISE.
9. ALL INTERIOR TRIM HANDLES SHALL BE SCHLAGE RHO STYLE.
10. ALL EXTERIOR TRIM HANDLES SHALL BE VON DUPRIN 06 STYLE.
11. ALL STOREFRONT (CUSTOMER ENTRY) EXIT DEVICES SHALL USE HEX KEY DOGGING: STANDARD.
12. SIGMA 8 STOR-A-KEY REQUIRED IN TELCO ROOM WITH CONTROL KEY AND STORE MASTER.
13. SURFACE RODS TO BE USED ON RETROFIT APPLICATIONS WITH PERIMETER GLASS DOORS.
14. CONCEALED RODS TO BE USED ON NEW PERIMETER GLASS DOORS.
15. DOORS AND THEIR FRAMES SHALL BE PAINTED ON BOTH SIDES, UNLESS OTHERWISE NOTED.
16. HANDLES, PULLS, LATCHES, LOCKS, AND OTHER OPERABLE PARTS SHALL HAVE A SHAPE THAT IS EASY TO GRASP WITH ONE HAND AND DOES NOT REQUIRE TIGHT GRASPING, PINCHING, OR TWISTING OF THE WRIST TO OPERATE. OPERABLE PARTS OF SUCH HARDWARE SHALL BE 34 INCHES MINIMUM AND 48 INCHES MAXIMUM ABOVE THE FLOOR PER ICC A117.1 2009 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES SECTION 404.2.6 DOOR HARDWARE. SEE DOOR SCHEDULE FOR ADDITIONAL INFORMATION.
17. WHERE RESTROOMS HAVE MULTI-PASS FIXTURES, DOOR SHALL HAVE PUSH/PULL PLATES BY HAGER COMPANIES (800) 325-9995. PUSH PLATE SHALL BE 4" x 16" STAINLESS STEEL # 305 BEVELED. PULL PLATE SHALL BE 4" x 16" STAINLESS STEEL # 80 SERIES WITH 1/2" PULL (S3J) OR APPROVED EQUAL. FINISH SHALL BE 2.60 (SATIN CHROME PLATED).
18. REFER TO MECHANICAL DRAWINGS FOR DOOR UNDERCUT LOCATIONS.
19. 'ELECTRIFIED' REFERS TO CARD ACCESS LOCATIONS ONLY FOR ELECTRIFIED HARDWARE OR TRIM.
20. 'EXIT ONLY' REFERS TO THE MAIN DOOR IN A DOUBLE DOOR PORTAL.
21. 'PASSIVE' REFERS TO THE SECONDARY DOOR IN A DOUBLE DOOR PORTAL - EXIT ONLY.

OTHER HARDWARE (SEE LOCKSET KEY FOR ADDITIONAL HARDWARE SPECIFIC TO CERTAIN LOCKSET TYPES)

FLOOR STOPS:
- #245D DOME STOP, US26D BY HAGER COMPANIES (800) 325-9995.

CLOSERS:
- INTERIOR DOOR CLOSERS SHALL BE NORTON SERIES 1600 REGULAR ARM BY NORTON DOOR CONTROLS (800) 458-1960, OR APPROVED EQUAL MOUNTED TO THE PRIVATE SIDE OF THE DOOR.
- EXTERIOR DOOR CLOSERS SHALL BE NORTON SERIES 1600 CLOSER/PLUS PARALLEL SPRING ARM BY NORTON DOOR CONTROLS, OR APPROVED EQUAL MOUNTED TO THE PRIVATE SIDE OF THE DOOR.
- ALL FINISHES TO BE IN ALUMINUM, NORTON FINISH SYMBOL "AL". CONTRACTOR SHALL COORDINATE THE FABRICATION AND INSTALLATION OF ALL DOORS AND METAL FRAMES TO ACCOMMODATE STANDARD DOOR CLOSERS.

KICK-PLATES:
- #193S, 12" HIGH x 2-1/2" WIDE (VERIFY WITH DOOR SIZE) ALUMINUM BY HAGER COMPANIES (800) 325-9995, OR APPROVED EQUAL.

ELECTRIC STRIKES:
- PROVIDED AND INSTALLED BY SECURITY VENDOR:
- VON DUPRIN 5100

DOOR POSITION CONTACT:
- PROVIDED AND INSTALLED BY SECURITY VENDOR.

CARD READER:
- PROVIDED AND INSTALLED BY SECURITY VENDOR.

LOCKSET KEY
(SEE DOOR SCHEDULE FOR ADDITIONAL HARDWARE SPECIFIC TO EACH DOOR)
ENTRY-1
- LOCKED: KEYED WITH THUMBTURN ON INTERIOR SIDE. SCHLAGE MODEL NUMBER ND53RD, WITH SMALL FORMAT INTERCHANGABLE CORE.

ENTRY-2
- FIXED: ENTRY BY KEY ONLY-NO THUMBTURN ON INTERIOR SIDE. SCHLAGE MODEL NUMBER ND 67-000, WITH SMALL FORMAT INTERCHANGABLE CORE.

PRIVACY
- LOCKED; NO KEY. SCHLAGE MODEL NUMBER ND40S.

PASSAGE-1
- NON-LOCKING: SCHLAGE MODEL NUMBER ND10S, WITH SMALL FORMAT INTERCHANGABLE CORE.

PANIC-1
PROVIDED AND INSTALLED BY GENERAL CONTRACTOR:
- DOOR VIEWER: NEW VUE ESI-1000 (ONLY FOR EXTERIOR EXIT DOOR)

PROVIDED AND INSTALLED BY SECURITY VENDOR:
- CYLINDER LOCK (AS REQUIRED)
- "BEST-LOCK" (OR BEST-LIKE"), 7-PIN SMALL FORMAT INTERCHANGEABLE, HIGH-SECURITY DRILL RESISTANT CORE.
- TYPICAL FRONT DOOR EXIT DEVICE:
  - TYPICAL FRONT DOOR NEW - CONCEALED RODS (CABLE 9849)
  - ACTIVE ELECTRIFIED: VON DUPRIN HD-QEL98.48NL-OP
  - ACTIVE: VON DUPRIN 98-48NL-OP
  - PASSIVE: VON DUPRIN 9844EO: EXIT ONLY DEVICE
- TYPICAL FRONT DOOR RETROFIT - SURFACE ROD(S) (CABLE 9849)
  - ACTIVE ELECTRIFIED: VON DUPRIN HD-QEL98.27NL-OP-UR.
  - ACTIVE: VON DUPRIN 9827NL-OP
  - PASSIVE: VON DUPRIN 9827EO: EXIT ONLY DEVICE
- TYPICAL FRONT DOOR - RIM MOUNT
  - ACTIVE ELECTRIFIED: VON DUPRIN HD-QEL98NL-OP
  - ACTIVE: VON DUPRIN 9844L-OP
- TOP STROKE: VON DUPRIN 2.89
- BOTTOM STROKE (CUT IN GROUND): VON DUPRIN 304L
- DOOR SWEEP
- OFFSET PULL ON EXTERIOR SIDE.
- ELECTRIFIED DOOR CORD: VON DUPRIN 788-18
- ELECTRIFIED TRANSFER HINGE: VON DUPRIN EPT-10
- ELECTRIFIED POWER SUPPLY (VERIFY IF REQUIRED): VON DUPRIN PS914-2E2
- CLOSER: SEE "OTHER HARDWARE" LIST.

PROVIDED AND INSTALLED BY SECURITY VENDOR:
- CARD READER: SOFTWARE HOUSE SWK-4230-26B
- REQUEST TO EXIT (REX) MOTION DETECTOR: BOSCH DS160

NOTE: PERFORMANCE OF FRONT DOOR IS AS FOLLOWS:
1. LOSS OF POWER:
   - A. BATTERY BACKUP IS PROVIDED TO CARD ACCESS CONTROL AND LOCKING MECHANISMS.
   - B. ALL LOCKING MECHANISMS SHALL BE FAIL-SAFE.
   - C. IN THE EVENT OF A COMPLETE POWER LOSS, ALL ELECTRONICALLY CONTROLLED DOORS SHALL UNLOCK.

PANIC 3 - ABD9K-EO-1-D28-TC-81-RC1-630 (RH) AND ABM-SK1 (STRIKE KIT)

PROVIDED AND INSTALLED BY GENERAL CONTRACTOR:
- CLOSER: SEE "OTHER HARDWARE" LIST.

PROVIDED AND INSTALLED BY SECURITY VENDOR:
- CYLINDER LOCK: FIXED; ENTRY BY KEY ONLY-NO THUMBTURN ON INTERIOR SIDE. SCHLAGE MODEL NUMBER ND80PD, WITH SMALL FORMAT INTERCHANGABLE CORE.
- SECURITECH AUTO-BOLT MAX (SERIES AB)
- DEADBOLT ONLY(D)
- MOUNTING: SURFACE MOUNT (S)
- AUXILIARY BOLTS: UPPER HORIZONTAL, LOWER HORIZONTAL (K)
- TRIM SET: INT: ESCUTCHEON, EXT: CONTROL TRIM (EG)
- LEVER STYLE: STANDARD (RETURN) (1)
- FUNCTION: 24VDC, REX, BPS (D28)
- HINGE SIDE BOLTS: 1 BULLET-TYPE (B1)
- CYLINDER: SFIC MORTISE CYLINDER (EC1)
- FINISH: SATIN STAINLESS STEEL (630)
- FULL LENGTH, CONTINUOUS HINGE
- CARD READER: SOFTWARE HOUSE SWK-4230-26B
- REQUEST TO EXIT (REX) MOTION DETECTOR: BOSCH DS160
- LIGHT SENSOR SWITCH
- PANIC BUTTON AND TRANSMITTER
- HIGH SECURITY METAL DOOR: INSULATED, 16 GAUGE: (EXAMPLE: STEELCRAFT L-SERIES F-STYLE)

PANIC 2
PROVIDED AND INSTALLED BY GENERAL CONTRACTOR:
- DOOR VIEWER: NEW VUE ESI-1000 (ONLY FOR EXTERIOR EXIT DOOR)
- SECURITY HINGES: FULL LENGTH.
- PICK PROTECTION PLATE: PEMKO 35722SP.
- CLOSER: SEE "OTHER HARDWARE" LIST.

PROVIDED AND INSTALLED BY SECURITY VENDOR:
- CYLINDER LOCK (AS REQUIRED)
- "BEST-LOCK" (OR BEST-LIKE"), 7-PIN SMALL FORMAT INTERCHANGEABLE, HIGH-SECURITY DRILL RESISTANT CORE.
- ELECTRIFIED THREE POINT LATCHING EXIT DEVICE SYSTEM: VON DUPRIN LX-RX-QEL9857LD (EMPLOYEE ENTRANCE/EXIT)
- EXIT ONLY - THREE POINT LATCHING EXIT DEVICE: VON DUPRIN 9857-LD-EO (EXIT ONLY)
- TOP STROKE: VON DUPRIN 2.89.
- BOTTOM STROKE (CUT IN GROUND): VON DUPRIN 304L
- LOCKSET: PULL WITH KEYED LOCK AND THUMBTURN.
- TRIM: VON DUPRIN 996L
- CARD READER: SOFTWARE HOUSE SWK-4230-26B
- REQUEST TO EXIT (REX) MOTION DETECTOR: BOSCH DS160
- DOOR CONTROL DEVICE: MILLENIUM GROUP 140-100958
- ACCESS POWER SUPPLY WITH FIRE UNLOCK: ALTRONIX 12 VDC (FOR CONNECTION TO THE FIRE ALARM SYSTEM).
- DOOR BELL KIT: NUTONE BK 12 SLWH.
- HIGH SECURITY METAL DOOR: INSULATED, 16 GAUGE: (EXAMPLE: STEELCRAFT L-SERIES F-STYLE)

ON SURFACE MOUNT CRASH BAR, BOTTOM ROD IS TO HAVE THE VON DUPRIN COVER, PART NUMBER 310-27-S OVER THE LOWER PART OF THE ROD. IF IS NOT ACCEPTABLE, THE CRASH BAR UNIT IS TO BE ORDERED WITH THE OPTION OF LESS BOTTOM ROD.

NOTE: PERFORMANCE OF REAR DOOR IS AS FOLLOWS:
1. S-POINT LATCHING DEVICE SHALL REMAIN UNLOCKED DURING BUSINESS HOURS. AFTER BUSINESS HOURS, S-POINT LATCHING SHALL BE RELEASED WITH CRASH BAR.
2. FIRE UNLOCK SUBSYSTEM OF ACCESS CONTROL POWER SUPPLY SHALL SENSE CLOSED CIRCUIT OF FACP GENERAL ALARM ON FIRE ALARM AND RELEASE ALL ACCESS CONTROL LOCKS.
3. FIRE UNLOCK OF ALL ELECTRONICALLY CONTROLLED DOORS SHALL OCCUR CONCURRENTLY WITH FACP NOTIFICATION APPLIANCES.
4. ALL ELECTRONICALLY CONTROLLED DOORS SHALL REMAIN UNLOCKED UNTIL FIRE ALARM IS RESET.
5. LOSS OF POWER:
   - A. BATTERY BACKUP SHALL BE PROVIDED TO ACCESS CONTROL POWER SUPPLY.
   - B. BATTERY BACKUP TIME OF ACCESS CONTROL POWER SUPPLY SHALL BE 8 HOURS OR LESS.
   - C. ALL LOCKING MECHANISMS SHALL BE FAIL-SAFE.
   - D. IN THE EVENT OF A COMPLETE POWER LOSS, ALL ELECTRONICALLY CONTROLLED DOORS SHALL UNLOCK.

Order Plans Online.com

MRA Buildings Group
MRA ARCHITECTURAL SERVICES, INC.
Architects, Planners, Urban Designers, Landscape Architects, Engineers and Surveyors
1414 Key Highway, Suite M301
Baltimore, Maryland 21230
443-490-7201

TEI
TELEGENT ENGINEERING INC.
2216 COMMERCE ROAD
FOREST HILL, MD 21050
PHONE: 410-692-5816
FAX: 410-692-5853
WWW.TEL-ENG.COM

Client
Verizon
Jared Yerg
3700 Area Corporate Drive
Charlotte, North Carolina 28273

Verizon
Simpsonville
NextGen
340 Harrison Bridge Road
Simpsonville, SC 29680

© CONTENTS COPYRIGHT 2020 MRA ARCHITECTURAL SERVICES, INC.

NO.	REVISION	DATE

FILE	DRAWN	ISSUED
17759x101	SKJ	06/19/2020

SHEET TITLE
Door Schedules and Finishes

SHEET NUMBER
38.01

Permit Documents