

CONSTRUCTION SPECIFICATIONS:

SECTION 07 5400 THERMOPLASTIC MEMBRANE ROOFING (CONTINUED)

- 3.7 ALTERNATE APPROVED INSTALLATION METHOD - INDUCTION WELDED ROOFING MEMBRANE INSTALLATION
A. INSTALL ROOFING MEMBRANE OVER AREA TO RECEIVE ROOFING ACCORDING TO ROOFING SYSTEM MANUFACTURER'S WRITTEN INSTRUCTIONS...

PRODUCTS PER TEST METHOD BELOW BY UL, OR ANOTHER TESTING AND INSPECTING AGENCY ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION.

- 1. EXTERIOR FIRE-TEST EXPOSURE: CLASS [A][B][C], ASTM E 108, FOR APPLICATION AND ROOF SLOPES INDICATED.
2. FIRE-RESISTANCE RATINGS: ASTM E 119, FOR FIRE-RESISTANCE-RATED ROOF ASSEMBLIES OF WHICH ROOFING SYSTEM IS A PART.

PART 5 PRODUCTS

- 5.1 POLYVINYL-CHLORIDE ROOFING MEMBRANE - PVC
A. PVC SHEET, ASTM D 424, TYPE III, FABRIC-REINFORCED THAT CONTAINS KEEL (ELVALOY) TO REDUCE PLASTICIZER MIGRATION...

SECTION 07 5410 POLYVINYL CHLORIDE (PVC) MEMBRANE ROOFING

- PART 1 GENERAL
1.1 SUMMARY
A. SECTION INCLUDES:
1. PVC MECHANICALLY FASTENED MEMBRANE ROOFING SYSTEM.

- 2. ENSURE GENERAL RIGIDITY AND PROPER SLOPE FOR DRAINAGE.
3. VERIFY THAT DECK IS SECURELY FASTENED WITH NO PROJECTING FASTENERS AND WITH NO ADJACENT UNITS IN EXCESS OF 1/16 INCH (1.6 MM) OUT OF PLANE RELATIVE TO ADJACENT DECK.

PART 5 PRODUCTS

- 5.1 POLYVINYL-CHLORIDE ROOFING MEMBRANE - PVC
A. PVC SHEET, ASTM D 424, TYPE III, FABRIC-REINFORCED THAT CONTAINS KEEL (ELVALOY) TO REDUCE PLASTICIZER MIGRATION...

SECTION 07 6200 SHEET METAL FLASHING AND TRIM

- PART 1 GENERAL
1.1 SUMMARY
A. SECTION INCLUDES:
1. COPINGS.
2. EDGE FLASHINGS.
3. SCUPPERS, CONDUCTOR HEADS AND DOWNPOUTS.

SECTION 07 6300 JOINT SEALERS

- PART 1 GENERAL
1.1 SUMMARY
A. SECTION INCLUDES:
1. JOINT BACKUP MATERIALS.
2. JOINT SEALERS.


SECTION 08 1113 HOLLOW METAL DOORS AND FRAMES

- PART 1 GENERAL
1.1 SUMMARY
A. SECTION INCLUDES:
1. HOLLOW STEEL DOORS AND FRAMES.

SECTION 08 1416 FLUSH WOOD DOORS

- PART 1 GENERAL
1.1 SUMMARY
A. SECTION INCLUDES:
1. WOOD VENEER FACED FLUSH DOORS.
2. RELATED SECTIONS:
1. SECTION 08 7100 - DOOR HARDWARE.

Vertical sidebar containing project information: DUNKIN - 1270 SPRING STREET, SUITE 7 ATLANTA GA 30309, ARCHITECT PROJECT #18-028, and a table with columns for SET REVISIONS, DATE, SCALE, DRAWN, PHH, CKD, and APPD.

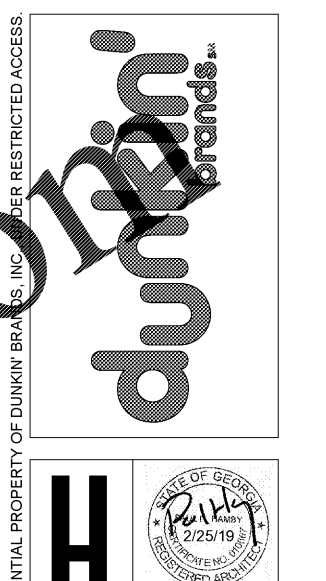

HAMBY ARCHITECTURE & DESIGN, INC. 6370 CORN DRIVE CUMMING GEORGIA 30028 770-887-9124