

CONSTRUCTION SPECIFICATIONS:

DIVISION 22 - PLUMBING

SECTION 22 1000 PLUMBING

PART 1 GENERAL

- 1.1 WORK INCLUDED
A. FURNISH ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY FOR THE COMPLETE INSTALLATION OF THE SANITARY SEWER SYSTEM...

PART 2 PRODUCTS

- 2.1 MATERIAL
A. DOMESTIC WATER PIPING SHALL BE COPPER OR PEX PIPING ACCORDING TO THE LOCAL CODE MINIMUM REQUIREMENTS...

- G. CONNECTION SIZE (MECHANICAL); 2 INCHES (51 MM)
H. BASKET, SOLIDS BASKET ACCESSORY MODEL 3011A-1
I. MODULAR RISER EXTENSIONS; MODEL 3020AX6 (RISER EXTENSION)...

PART 3 EXECUTION

- 3.1 INSTALLATION
A. ALL PIPING AND EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE DRAWINGS AND SHALL COMPLY WITH ALL APPLICABLE CODES...

- D. HOSE BIBBS SHALL BE INSTALLED AS INDICATED ON THE DRAWINGS AND SHALL HAVE PRESSURE RATED 3/4 IN. MAIN FEED...
E. EXHAUST DUCTWORK SHALL BE INSTALLED IN ACCORDANCE WITH THE DRAWINGS AND SHALL COMPLY WITH ALL APPLICABLE CODES...

PART 4 FINISHES

- 4.1 FINISHES
A. ALL FINISHES SHALL BE AS SHOWN ON THE DRAWINGS AND SHALL COMPLY WITH ALL APPLICABLE CODES AND ORDINANCES...

DIVISION 23 - HEATING, VENTILATING AND AIR CONDITIONING

SECTION 23 2000 HEATING, VENTILATING AND AIR CONDITIONING

PART 1 GENERAL

- 1.1 WORK INCLUDED
A. FURNISH ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY FOR THE COMPLETE INSTALLATION OF THE HEATING, VENTILATING AND AIR CONDITIONING SYSTEM...

PART 2 PRODUCTS

- 2.1 MATERIAL
A. FURNISH ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY FOR THE COMPLETE INSTALLATION OF THE HEATING, VENTILATING AND AIR CONDITIONING SYSTEM...

PART 3 EXECUTION

- 3.1 ROOF OPENING
A. HEATING CONTRACTOR AND GENERAL CONTRACTOR MUST VERIFY ALL ROOF OPENINGS IN RELATION TO SPECIFIC UNITS SELECTED FROM SCHEDULE AS SHOWN ON THE DRAWINGS...

DIVISION 26 - ELECTRICAL

SECTION 26 1000 ELECTRICAL

PART 1 GENERAL

- 1.1 WORK INCLUDED
A. FURNISH ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY FOR THE COMPLETE INSTALLATION OF THE ELECTRICAL SYSTEM AS SHOWN ON THE DRAWINGS...


PART 2 PRODUCTS

- 2.1 SERVICE MATERIAL
A. ARRANGE FOR AND INSTALL 30 AMP MINIMUM TEMPORARY ELECTRICAL SERVICE, 120-208 VOLTS SINGLE PHASE SERVICE FROM SITE AFTER PERMANENT SERVICE IS OPERATIONAL...

DUNKIN' BRANDS logo and HAMBLY ARCHITECTURE & DESIGN, INC. logo with contact information.

Table with columns for SET REVISIONS, NO, DESCRIPTION, DATE, SCALE, DRAWN, PHH, CKD, APPD.

CONSTRUCTION SPECIFICATIONS (CONT.) and ARCHITECT PROJECT #18-028

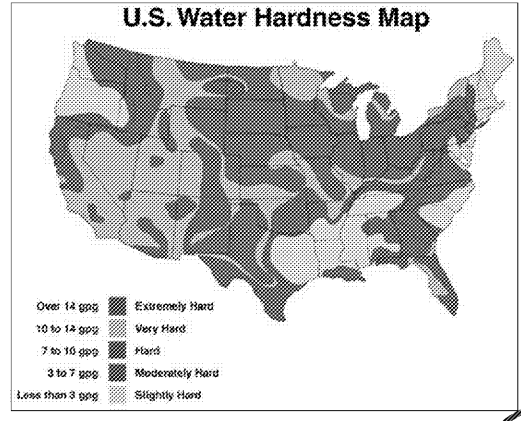

DIVISION 23 - HEATING, VENTILATING AND AIR CONDITIONING

SECTION 23 2000 HEATING, VENTILATING AND AIR CONDITIONING

PART 1 GENERAL

- 1.1 WORK INCLUDED
A. FURNISH ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY FOR THE COMPLETE INSTALLATION OF THE HEATING, VENTILATING AND AIR CONDITIONING SYSTEM...

PART 2 PRODUCTS

- 2.1 MATERIALS AND EQUIPMENT
DUNKIN' BRANDS HAS NATIONALLY ACCOUNTED TWO HVAC MANUFACTURERS TO SUPPLY ROOFTOP EQUIPMENT FOR THE BRAND. CONTACT INFORMATION IS AS NOTED FOR EACH OF THE MANUFACTURERS BELOW...

SECTION 26 1000 AUTOMATIC FIRE EXTINGUISHING SYSTEM

PART 1 GENERAL

- 1.1 WORK INCLUDED
A. FURNISH ALL LABOR AND MATERIAL NECESSARY FOR THE COMPLETE INSTALLATION OF AN AUTOMATIC FIRE EXTINGUISHING SYSTEM AS INDICATED ON THE DRAWINGS AND AS SPECIFIED IN THIS SECTION AND AS REQUIRED BY ALL LOCAL GOVERNING AUTHORITIES AND CODES.

SECTION 26 1000 AUTOMATIC FIRE EXTINGUISHING SYSTEM

- 1.1 WORK INCLUDED
A. FURNISH ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY FOR THE COMPLETE INSTALLATION OF THE AUTOMATIC FIRE EXTINGUISHING SYSTEM AS SHOWN ON THE DRAWINGS...