

2 DOOR AND OPENING FRAME TYPES

1/4" = 1'-0" NOTE:

DOOR SCHEDULE

NO.	DOOR DATA				FINISH	FRAME DATA		FINISH	NOTES
	LOCATION	SIZE	MATERIAL	TYPE		MATERIAL	TYPE		
101A	ENTRANCE	3'-0" X 7'-0" X 1 3/4"	ALUM/GL	A	FACT	ALUM	3	FACT	1 AND 4
101B	VESTIBULE	3'-0" X 7'-0" X 1 3/4"	ALUM/GL	A	FACT	ALUM	3	FACT	1 AND 4
105	MENS RESTROOM	3'-0" X 6'-8" X 1 3/4"	WOOD	C	P-02	H.M.	1	P-2	2 AND 4
106	WOMENS RESTROOM	3'-0" X 6'-8" X 1 3/4"	WOOD	C	P-02	H.M.	1	P-2	2 AND 4
107	OFFICE	3'-0" X 6'-8" X 1 3/4"	WOOD	C	P-02	H.M.	1	P-2	4 AND 5
108	UTILITY	2'-6" X 6'-8" X 1 3/4"	WOOD	C	P-02	H.M.	1	P-2	4 AND 5
109	SERVICE	4'-0" X 7'-0" X 1 3/4"	H.M.	B	PTE-02	H.M.	2	PTE-02	3 AND 4

NOTES

1. PROVIDE 1" INSULATED & TEMPERED GLASS; FRAME TO MATCH STOREFRONT COLOR
2. UNDERCUT DOOR 1"
3. PROVIDE 190 DEGREE DOOR VIEWER CENTERED IN DOOR @ 5'-0" A.F.F. - MODEL SSVLAB FROM DAVSTAR SECURITY
4. REFER TO DUNKIN BRANDS MASTER HARDWARE SCHEDULE FOR ALL DOORS.
5. PROVIDE LOUVERED VENT @ EACH DOOR FOR UTILITY ROOM AND OFFICE. REFER TO LOCAL CODES FOR FIRE RATING OF DOORS
6. ADD DOUBLE-ACTING ELIASON DOOR TO SEPARATE SERVICE AREA FROM PREP AREA WHEN APPLICABLE (NOT SHOWN ON PLAN); REFER TO NATIONAL ACCOUNTS FOR CONTACT INFO. DOOR TO BE LAMINATED ON BOTH SIDES. FORMICA #837-58 "GRAPHITE" HPL, 12" STAINLESS STEEL BASE PLATES ON BOTH SIDES AND 9"x30" ACRYLIC WINDOW UP 54 1/4" TO CENTER.

MASTER HARDWARE SCHEDULE

SET No.	LOCATION	HARDWARE	MODEL #	MANUFACTURER	REMARKS
1	VESTIBULE	TEMPORARY CYLINDER	3901 OR 3902 AS REQUIRED	HAGER	
		DOOR CLOSER	5200 MLT 1-6 DLY ALM	HAGER	
		OFFSET PIVOTS		HAGER	
		DEADLOCK	MS 1850A	ADAMS RITE	
		"D" DOOR HANDLE	CUSTOM	HEALY FOUNDRY	SEE ELEVATIONS & NATIONAL ACCOUNTS
		THRESHOLD	404S ML 1/2" X 4"	HAGER	
2	SERVICE	FLOOR STOP	252F US26D	HAGER	ALL ADDITIONAL HARDWARE INCL. WITH
		HINGES	1279 US26D	HAGER	
3	OFFICE	SPRING HINGES	1250 US26D	HAGER	
		LOCKSET	3480 WTN US26D	HAGER	
		LETTER SLOT	826 PA28	HAGER	
		SLEEVE	800	HAGER	
		FLOOR STOP	241F US26D	HAGER	
		HINGES	1279 US26D	HAGER	
4	HALL/ALCOVE	SPRING HINGES	1250 US26D	HAGER	
		LOCKSET	3470 WTN US26D	HAGER	
		FLOOR STOP	241F US26D	HAGER	
		DOOR VIEWER	1756 US26D	HAGER	
		1-1/2 PAIR BUTT HINGES	BB-1279 26D	HAGER	
		LOCKSET	3410 WTN US26D	HAGER	
5	RESTROOM	FLOOR STOP	241F US26D	HAGER	
		KICK PLATE	214S 36x36x10" x 1" L.W.O.D.	HAGER	
		DOOR CLOSER	5200 MLT 1-6 DLY ALM	HAGER	
		HINGES	1181 32D	HAGER	
		LOCKSET	3410 WTN US26D	HAGER	
		DOOR CLOSER	5200 PA 2-5 HDHOS ALM	HAGER	
6	REAR	THRESHOLD	413S ML	HAGER	
		WEEPER	802S B MI	HAGER	
		WEEPER	268S US26D	HAGER	
		WEATHER STRIPPING	800S B MIL	HAGER	
		DOOR GUARD	341 D 32D	HAGER	
		DOOR VIEWER	1756 US26D	HAGER	ALTERNATIVE: MODEL # L-VGLF-WD, 9" x 5", NATIONAL GUARD PRODUCTS
		HINGES	BB-1279 26D	HAGER	
		LOCKSET	3410 WTN US26D	HAGER	
		FLUSH BOLTS	282D US26D	HAGER	
		7	UTILITY ROOM	HINGES	BB-1279 26D
		LOCKSET	3410 WTN US26D	HAGER	
		FLUSH BOLTS	282D US26D	HAGER	


ROOM FINISH SCHEDULE

NO.	ROOM NAME	FLOOR CODE	BASE CODE	WALL CODE	CEILING CODE	NOTES
101	SALES AREA	FT-01	FTB-1 CUT	NOTE #1	CT-02/P-03	1,3,4
102	SEATING AREA	FT-01	FTB-1 CUT	NOTE #1	CT-02/P-03	1,3,4
103 A&B	DRIVE THRU	FT-02	FTB-2 COVE	NOTE #1	P-03	3,4
104	SERVICE AREA	FT-02	FTB-2 COVE	NOTE #1	P-03	1,3,4
105	MENS RESTROOM	FT-01	FTB-1 ALT.CUT	NOTE #1	P-03	1,2,3,4
106	WOMENS RESTROOM	FT-01	FTB-1 ALT.CUT	NOTE #1	P-03	1,2,3,4
107	OFFICE	FT-02	FTB-2 COVE	FRP-01	CT-03	2,3,4
108	PREP/STORAGE AREA	FT-02	FTB-2 COVE	FRP-01	CT-03	3,4
109	ALCOVE	FT-01	FTB-1 CUT	NOTE #1	CT-01	1,2,3,4

NOTES

1. REFER TO INTERIOR ELEVATIONS FOR PROPER WALL FINISHES IN DESIGNATED AREA
2. SEE INTERIOR ELEVATIONS FOR DOOR FINISHES
3. PROVIDE ALUMINUM CORNER GUARDS AT ALL OUTSIDE CORNERS OF WALLS, SEE FLOOR PLAN FOR LOCATIONS
4. G.C. TO VERIFY ALL FINISHES WITH DBI CM PRIOR TO ORDERING MATERIALS.

WWW.LDILine.com @

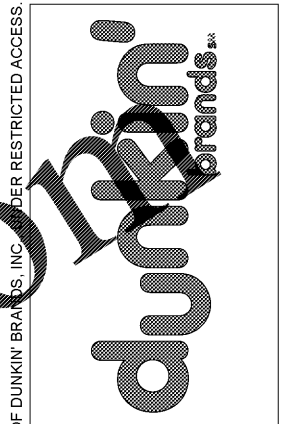

H

HAMBY ARCHITECTURE & DESIGN, INC.
6370 CORN DRIVE
CUMMING GEORGIA 30028
770-887-9124

NO	DESCRIPTION	DATE	SCALE	DRAWN	PHH	CKD	APPD
	SET REVISIONS	2/25/19					
	SHEET REVISIONS						

DUNKIN - 1270 SPRING STREET, SUITE 7
ATLANTA GA 30309

**DOOR & FRAME TYPES
DOOR, MASTER HARDWARE &
ROOM FINISH SCHEDULE**

ARCHITECT PROJECT #18-028

A-10.0