## TOILET ROOM ACCESSORIES

| | |
|---|---|
| B155 | BOBRICK 24 OZ. SOAP DISPENSER |
| B2740 | BOBRICK DOUBLE TOILET TISSUE DISPENSER |
| B253 | BOBRICK PAPER TOWEL DISPENSER |
| A-24x36 | GAMCO 24" x 36" ANGLE FRAME MIRROR |
| 150Sx36 | GAMCO 1 1/2" X 36" GRAB BAR |
| 150Sx42 | GAMCO 1 1/2" X 42" GRAB BAR |
| 150Sx18 | GAMCO 1 1/2" X 18" GRAB BAR |
| MS-1 | GAMCO MOP HOLDER |

## TOILET ROOM NOTES:

1. ALL TOILET ROOM ACCESSORIES PROVIDED BY BASS SECURITY. REFER TO T01 FOR VENDOR CONTACT.
2. ALL STORES MUST INCLUDE 2 REST ROOMS, EVEN WHEN NOT REQUIRED BY CODE. ANY VARIATION MUST BE APPROVED, IN WRITING, BY THE DOLLAR GENERAL CONSTRUCTION DEPARTMENT.
3. RESTROOMS MUST COMPLY WITH ALL BUILDING (FEDERAL, STATE, AND LOCAL) FIRE, AND HEALTH DEPARTMENT CODES. ADA REQUIREMENTS MUST ALSO BE MET IN BOTH RESTROOMS. SOME CODES MAY REQUIRE ADDITIONAL TOILETS OR LAVATORIES. PLEASE CONTACT DOLLAR GENERAL CONSTRUCTION DEPARTMENT FOR ALTERNATE PLANS FOR THESE SITUATIONS.
4. PROVIDE AND INSTALL 2'x3' MIRROR (OR LARGER IF REQUIRED BY CODE).
5. CONTRACTOR TO INSTALL SOAP DISPENSERS, TOILET PAPER HOLDERS, DOOR CLOSER, EXHAUST FANS, AND ALL BASS SECURITY PARTS IN BOTH RESTROOMS. PROVIDE SOLID BLOCKING IN WALL FOR SUPPORT.

NOTE: FRONT CHECKOUT COUNTER TO BE PROVIDED BY DOLLAR GENERAL AND INSTALLED AT DOLLAR GENERAL'S DIRECTION. COUNTERS SHALL INCLUDE A PORTION OF AT LEAST 36" IN LENGTH WHICH IS NO MORE THEN 34" ABOVE THE FINISH FLOOR. COUNTERS SHALL BE ON AN ACCESSIBLE ROUTE.




A - SERVICE COUNTER PLAN




B - ELEVATION

## 11 SERVICE COUNTER DETAILS
1/4" = 1'-0"







## 3 ANSI STANDARD MOUNTING DETAILS
1/8" = 1'-0"




NOTE:
1. REFER TO 3/A3 FOR ADDITIONAL ADA MOUNTING HEIGHTS AND REQUIRED CLEARANCES FOR TOILET ROOM ACCESSORIES AND PLUMBING FIXTURES.
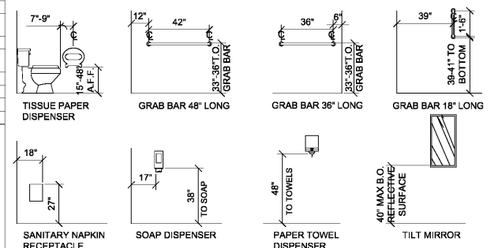
## 2 RESTROOM ELEVATIONS
1/4" = 1'-0"




## 1 ENLARGED PLAN
1/4" = 1'-0"

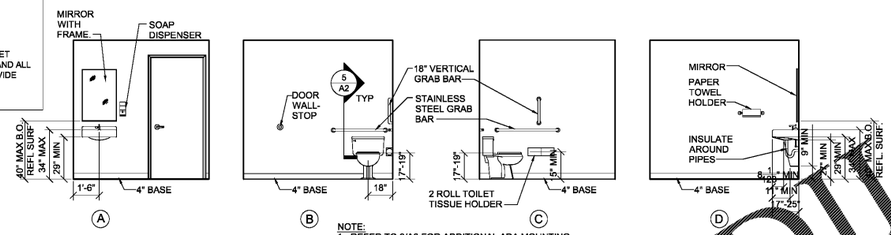


## 6 WATER HEATER SHELF DETAIL
1/8" = 1'-0"

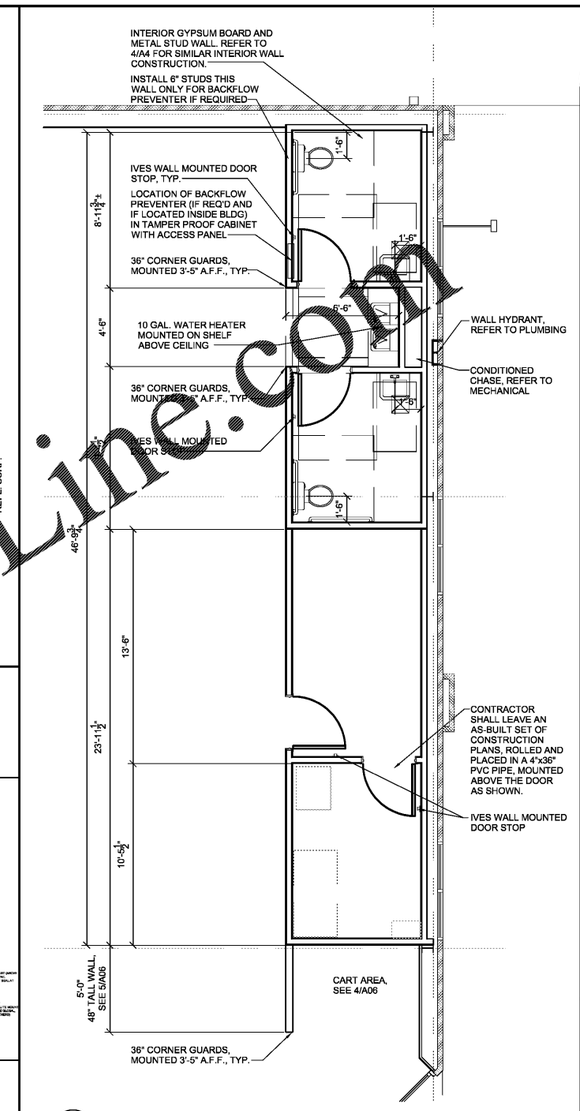


## 5 ANSI STANDARD MOUNTING DETAILS
1/8" = 1'-0"



## 4 ROOF PLAN
NTS

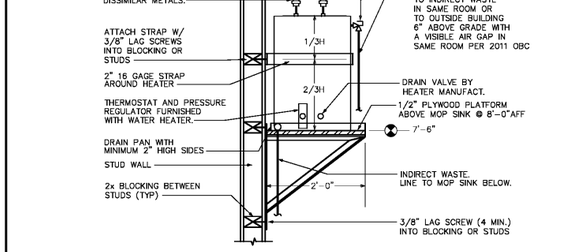


## 7 MOP SINK DETAIL
NTS

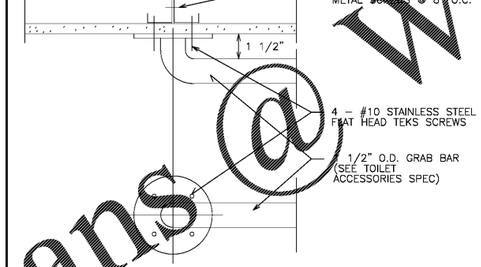


## 8 COLUMN DETAIL
NTS

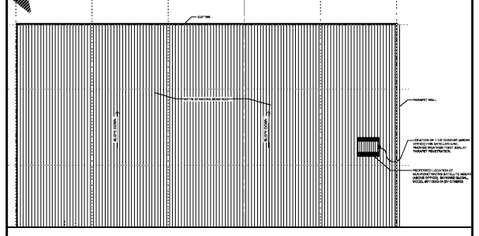

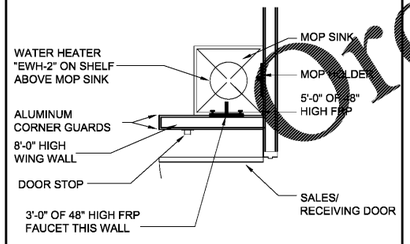
## 9 CORNER AT STOREFRONT
NTS




DRINK FIXTURE WALL MOUNTING SUPPORT NOTES:

1. PROVIDE AND INSTALL 2X6 WHITE PINE - GRADE 2 OR BETTER.
2. PROVIDE AND INSTALL 2X4 WHITE PINE - GRADE 2 OR BETTER.
3. FASTEN THE 2X6 TO THE WALL WITH THE TOP EDGE OF THE BOARD AT 78" A.F.F., REFER TO FIXTURE PLAN FOR LENGTH AND LOCATION OF BOARD.
4. FASTEN THE 2X4 TO THE WALL WITH THE TOP EDGE OF THE BOARD AT 12" A.F.F., REFER TO FIXTURE PLAN FOR LENGTH AND LOCATION OF BOARD.
5. PRE-DRILL PILOT HOLES IN ALL BOARDS PRIOR TO INSTALLATION TO PREVENT WOOD SPLITS.
6. SECURE THE 2X6 WITH TWO SELF-TAPPING SCREWS. MINIMUM SCREW SIZE IS 4"x 1/4".
7. FASTEN THE 2X4 WITH WITH SELF-TAPPING SCREW PER WALL STUD. MINIMUM SCREW SIZE IS 4"x 1/4".
8. CAULK THE EDGES OF THE 2X6 AT THE TOP AND BOTTOM WHERE IT MEETS THE WALL PRIOR TO PAINTING.
9. PRIME AND PAINT BOTH BOARDS TO MATCH WALL COLOR.

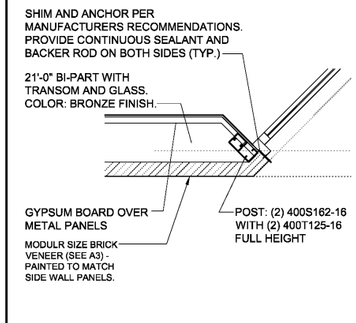NOTE: VERIFY LOCATIONS OF ANCHOR BOARDS WITH FIXTURE PLAN

## 10 ANCHOR BOARD DETAIL
1/2" = 1'-0"

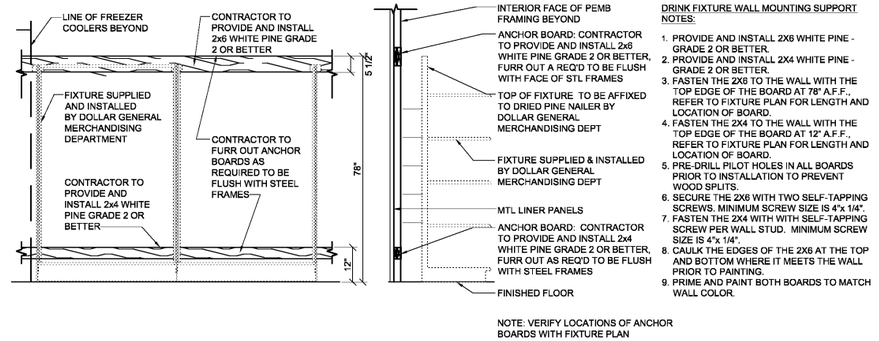Order Plans @ WWW.LDILine.com

STATE OF GEORGIA
ROBERT E. WALKER IV
CERTIFICATE NO. 32393
REGISTERED ARCHITECT
07/21/2020

**Robert E. Walker, IV Architect**
2229 FIRST AVE. SOUTH
SUITE 110
BIRMINGHAM, Alabama
35233
T-205.254.3212
F-205.254.3269

**DOLLAR GENERAL BUILDING**
**Prototype 9100 SF E**
**Store # 22323**

DG Villa Rica
101 Prospector Drive
Villa Rica, GA

**CONSTRUCTION DOCUMENTS**

PROJECT NO.: 8095.89
ISSUED: 07/21/2020

ENLARGED PLANS
RESTROOMS
DETAILS

**A2**