
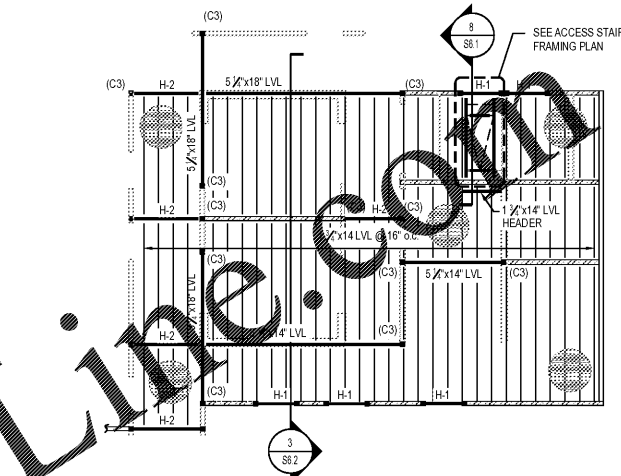


**STRUCTURAL NOTES**

1. T/S INDICATES TOP OF STEEL ELEVATION ABOVE REFERENCE SLAB ELEVATION
2. ALL T/S SLOPES ARE CONSTANT BETWEEN POINTS OF GIVEN ELEVATION
3. SEE SHEET S0.1 FOR COLUMN SCHEDULE AND DESIGN CRITERIA
4. SEE SHEETS S2.1 & S2.2 FOR ADDITIONAL SECTIONS AND DETAILS
5. ALL SECTIONS TYP. U.N.O.
6. WOOD TRUSSES SHALL BE DESIGNED AND FABRICATED BY A FRANCHISED TRUSS MANUFACTURER IN ACCORDANCE WITH APPROPRIATE SECTIONS OF THE TIMBER CONSTRUCTION MANUAL (ATC). SHOP DRAWINGS ARE THE RESPONSIBILITY OF THE TRUSS MANUFACTURER AND SHALL BE STAMPED BY A REGISTERED STRUCTURAL ENGINEER, LICENSED IN THE STATE OF GEORGIA. HANDLING AND ERECTION OF TRUSSES SHALL BE IN ACCORDANCE WITH THE ATC MANUAL.

**STRUCTURAL LEGEND**


- (?) COLUMN/FOOTING DESIGNATION - SEE COLUMN/FOOTING SCHEDULE ON S0.1.
- NON-LOAD BEARING WALLS
- LOAD BEARING STUD WALLS
- T/S INDICATES TOP OF STEEL ELEVATION ABOVE FINISHED FLOOR.
- T/B INDICATES TRUSS BEARING ELEVATION ABOVE FINISHED FLOOR.
- H-? INDICATES HEADER SIZE SEE HEADER SCHEDULE ON S0.1 AND SECTIONS 10, & 11/S2.1
- 1/2" EXTERIOR GRADE PLYWOOD SHEATHING. ATTACH TO FRAMING WITH NAILS, 6" o.c. @ EDGES AND 12" o.c. INTERMEDIATE.

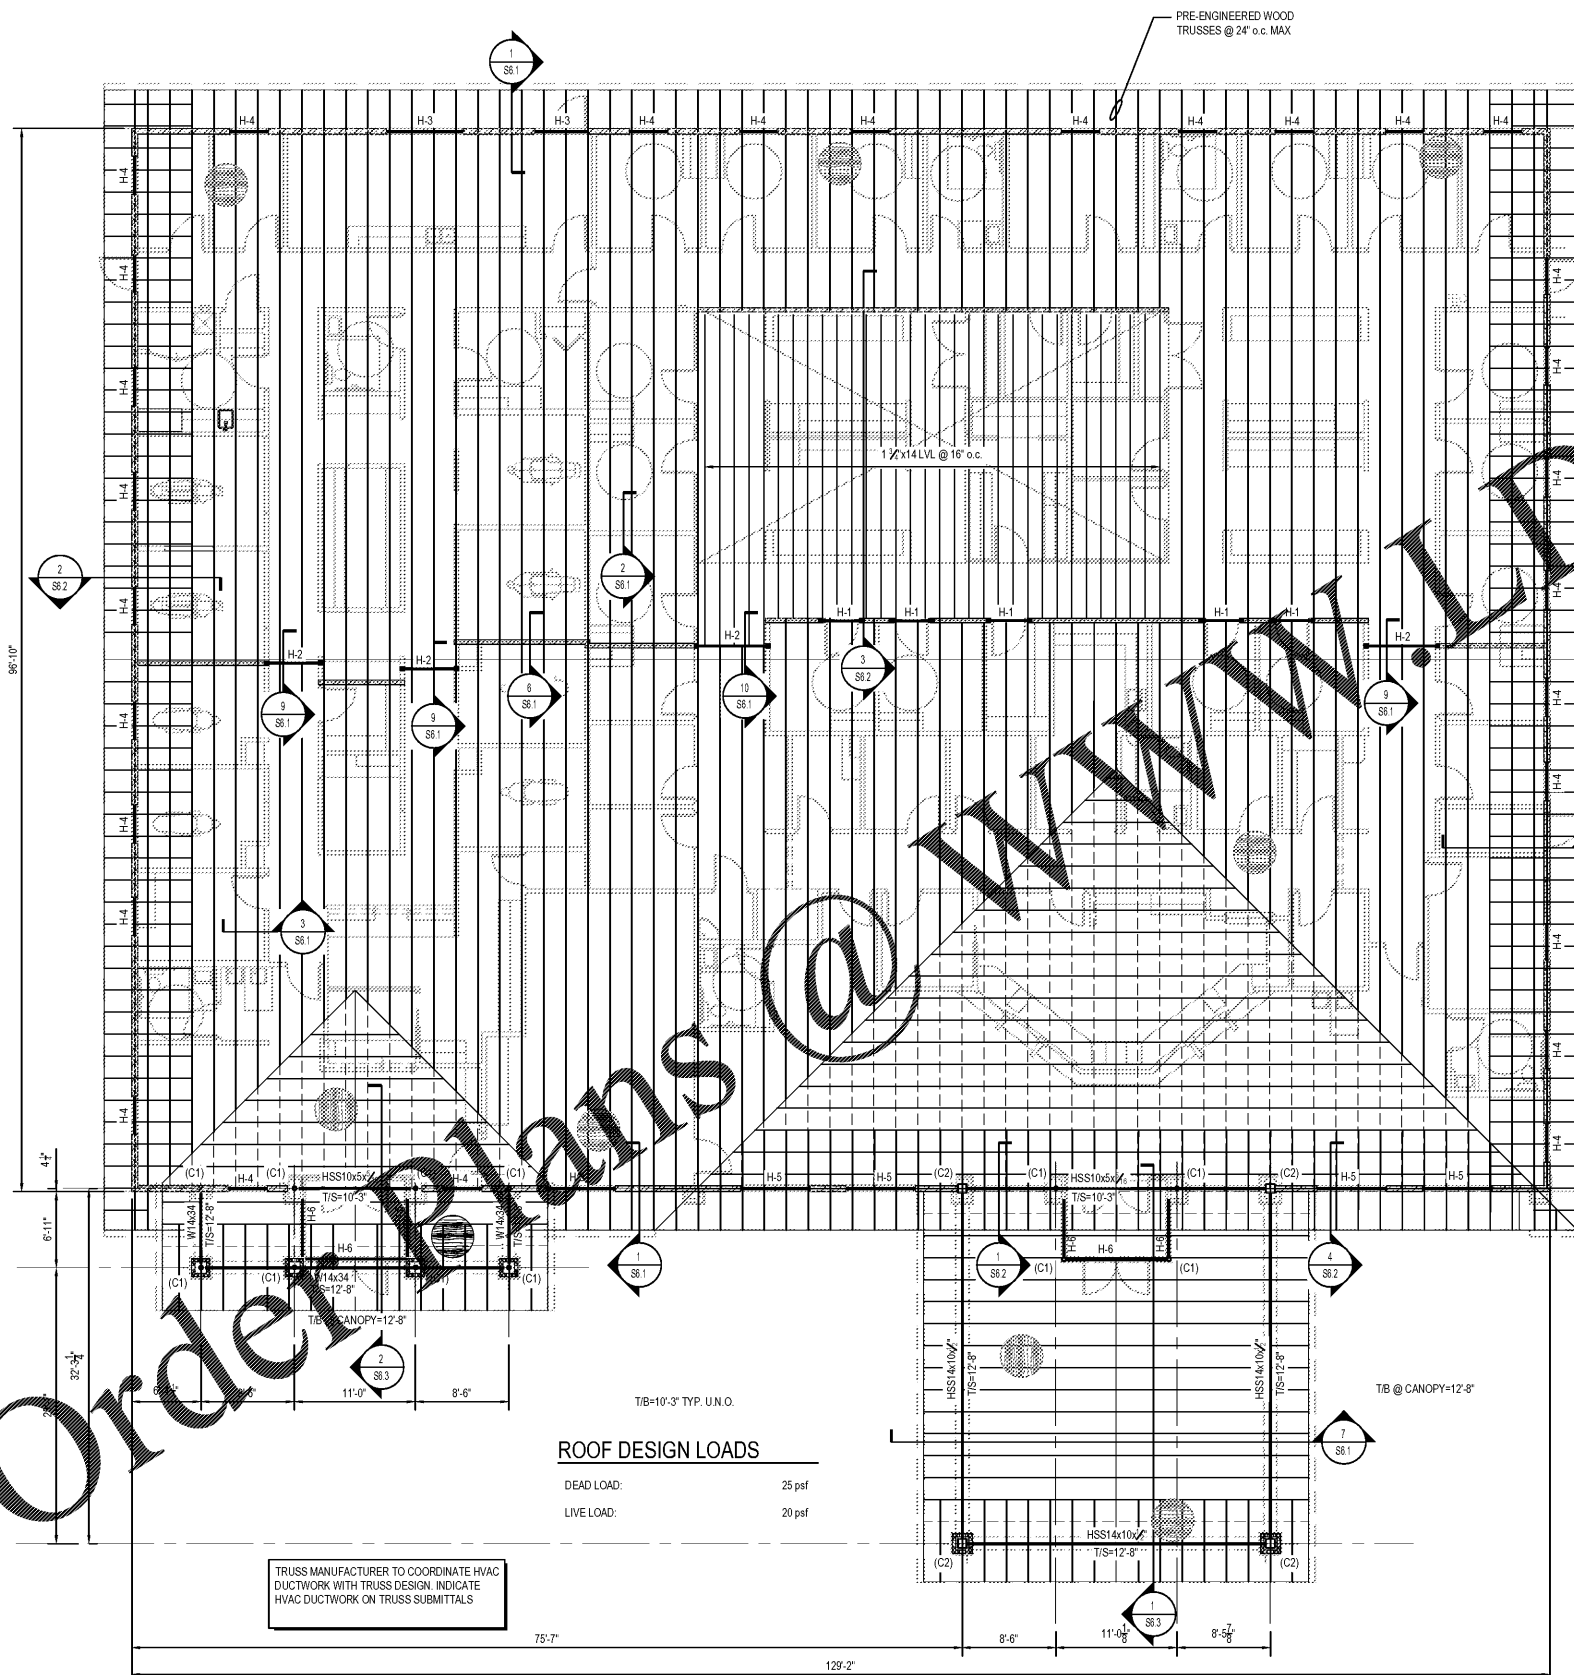

**2 MEZZANINE FRAMING PLAN**  
SCALE: 1/8" = 1'-0"  
F.F.E.=11'-1"  
SCALE: 1/8" = 1'-0"

**FLOOR DESIGN LOADS**

DEAD LOAD:	20 psf
LIVE LOAD:	60 psf

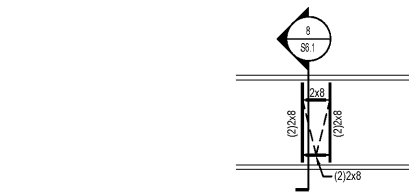


**3 ACCESS STAIR FRAMING PLAN**  
SCALE: 1/8" = 1'-0"  
SCALE: 1/8" = 1'-0"

**ROOF DESIGN LOADS**

DEAD LOAD:	25 psf
LIVE LOAD:	20 psf

TRUSS MANUFACTURER TO COORDINATE HVAC DUCTWORK WITH TRUSS DESIGN. INDICATE HVAC DUCTWORK ON TRUSS SUBMITTALS

**1 ROOF FRAMING PLAN**  
SCALE: 1/8" = 1'-0"



**MA & A** March Adams & Associates  
310 Dodds Ave.  
P.O. Box 3689  
Chattanooga, Tennessee 37404  
PH: (423)698-6675  
Consulting Engineers MAA #: 20109



**ISSUE DATES**

INITIAL	09-04-2020
1.	
2.	
3.	
4.	
5.	
6.	