

SITE LIGHTING FEATURES REVISED
 PER PLATFORM WEG UPDATE

ACERTUS
 CONSULTING GROUP, LLC
 8150 S. W. 11th St., Suite 100
 Miami, FL 33156
 www.acertusgroup.com

Firestone
 COMPLETE AUTO CARE

THIS DRAWING IS THE PROPERTY OF FIRESTONE RETAIL OPERATIONS, LLC AND IS LOANED TO THE ENGINEER FOR THE PROJECT ONLY. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. THE ACCEPTANCE OF THIS DRAWING BY THE ENGINEER SHALL BE AN ACCEPTANCE OF THE PROFESSIONAL OPINION OF THE ENGINEER AND NOT AN ACCEPTANCE OF THE DESIGN OR THE DRAWING BY FIRESTONE RETAIL OPERATIONS, LLC.

NEW FCAC STORE
 2020 I
 283 DAWSONVILLE HIGHWAY SW
 GAINESVILLE, GA 30501



ISSUE BLOCK


1	07/20/20	REV #1
2	10/02/20	REV #2
3	10/16/20	REV #4
4	11/15/20	IFC

PROPERTY NO: 160109
 6 DIGIT NO: 908074
 4 DIGIT NO: 7843
 ACR PROJECT NUMBER: 1955855
 TO PERMIT: DATE: 04/09/20
 TO BID: DATE: # - # - #

SHEET TITLE
PHOTOMETRIC
CUSHSHEETS
 SHEET NUMBER:
PSL3

OSQ™ LED Area Flood Luminaires Featuring Cree TrueWhite™ Technology - Medium

Product Description
 The OSQ™ LED Area Flood Luminaires feature Cree TrueWhite™ Technology - Medium. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W.

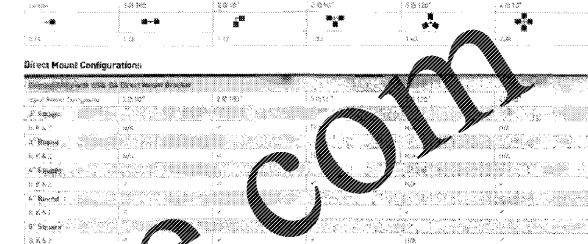

Ordering Information
 The OSQ™ LED Area Flood Luminaires are available in the following configurations:
 150W DA, 150W BK, 300W DA, 300W BK
 Color Options: 5000K, 5700K, 6500K
 Mounting: 150° Beam, 30° Beam


Luminaire (Mount) Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

CREE LIGHTING

OSQ™ LED Area Flood Luminaires Featuring Cree TrueWhite™ Technology - Medium

Product Description
 The OSQ™ LED Area Flood Luminaires feature Cree TrueWhite™ Technology - Medium. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W.

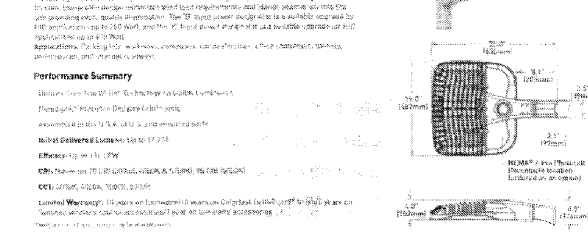

Ordering Information
 The OSQ™ LED Area Flood Luminaires are available in the following configurations:
 150W DA, 150W BK, 300W DA, 300W BK
 Color Options: 5000K, 5700K, 6500K
 Mounting: 150° Beam, 30° Beam


Luminaire (Mount) Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

CREE LIGHTING

OSQ™ LED Area Flood Luminaires Featuring Cree TrueWhite™ Technology - Medium

Product Description
 The OSQ™ LED Area Flood Luminaires feature Cree TrueWhite™ Technology - Medium. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W.

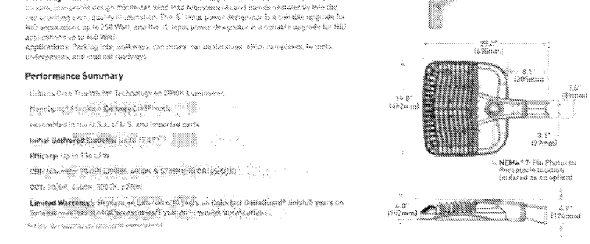

Ordering Information
 The OSQ™ LED Area Flood Luminaires are available in the following configurations:
 150W DA, 150W BK, 300W DA, 300W BK
 Color Options: 5000K, 5700K, 6500K
 Mounting: 150° Beam, 30° Beam

Luminaire (Mount) Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

CREE LIGHTING

OSQ™ LED Area Flood Luminaires Featuring Cree TrueWhite™ Technology - Medium

Product Specifications
 The OSQ™ LED Area Flood Luminaires feature Cree TrueWhite™ Technology - Medium. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W.

Beam Spread Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

Beam Spread Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

Beam Spread Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

CREE LIGHTING

OSQ™ LED Area Flood Luminaires Featuring Cree TrueWhite™ Technology - Medium

Product Specifications
 The OSQ™ LED Area Flood Luminaires feature Cree TrueWhite™ Technology - Medium. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W. The OSQ™ LED Area Flood Luminaires are designed for outdoor use and are available in 150W and 300W.

Beam Spread Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

Beam Spread Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

Beam Spread Data Table

Power (W)	Beam Spread	Beam Angle	Beam Diameter (ft)	Beam Diameter (m)	Beam Area (sq ft)	Beam Area (sq m)	Beam Length (ft)	Beam Length (m)
150	150°	150°	1.0	0.3	0.785	0.283	1.0	0.3
150	30°	30°	0.173	0.053	0.0298	0.0108	0.173	0.053

CREE LIGHTING

Order Plans @

Nov 12, 2020 1:23pm - USER: jmcollins
 G:\projects\firestone\firestone\2020\01_bars - gainesville, ga\Sheets\PSL3 - PHOTO METRIC CUSHSHEETS.rvt