

- DECOR / FINISH NOTES:**
1. VERIFY LOCAL HEALTH DEPARTMENT REQUIREMENTS REGARDING CEILINGS, WALLS & FLOOR FINISHES BEFORE PROCEEDING.
 2. ALL WALL FINISHES TO EXTEND 6" MINIMUM BEHIND LINE OF SIGHT AT PERMANENT FIXTURES OR CASEWORK.
 3. WHETHER WALL CLADDING WILL BE NEW OR REPLACED IS TO BE DETERMINED BY CLIENT PROJECT MANAGER. GENERAL CONTRACTOR TO PROVIDE AND INSTALL NEW MARIETTE WALL CLADDING PER FINISH DRAWINGS U.N.O. IF EXISTING WALL CLADDING IS TO REMAIN THEN IT IS THE RESPONSIBILITY OF THE G.C. TO PATCH AND REPAIR AS NEEDED.
 4. GENERAL CONTRACTOR TO REFER TO ENLARGED FINISH PLAN FOR SERVICE DEPARTMENT WALL FINISHES.
 5. COORDINATE WITH CLIENT PROJECT MANAGER FOR WALL AND FLOOR FINISHES IN RESTROOMS, BACK ROOMS, STOCK ROOMS, CONFERENCE ROOMS, OFFICES, AND ANY OTHER SPACES NOT INCLUDED THERE.
 6. ANY STAINLESS STEEL COLUMN WRAPS OR HOODS NEEDING NEW OR REPLACEMENT TO BE DETERMINED AND COORDINATED BY CLIENT PROJECT MANAGER.
 7. PAINT NOTES
 - 7a. ALL PAINTED WALL SURFACES TO BE EGGSHELL FINISH UNLESS NOTED OR REGULATED BY LOCAL HEALTH DEPARTMENT. STENCIL PAINT FINISH TO BE PLAT
 - 7b. PAINT EXPOSED HVAC PARALLEL TO AND ATTACHED TO WALLS TO MATCH ADJACENT WALL COLOR, INCLUDING WALL GRILLS.
 - 7c. ALL EXISTING CEILING SURFACES OVER SALES FLOOR TO RECEIVE "PROCOT" FINISH TO MATCH PT-60C. REFER TO ARCHITECTURAL FINISHING CEILING PLAN FOR ANY ADDITIONAL CEILING FINISHES.
 - 7d. EXPOSED CEILING EXISTING PAINT TO REMAIN UNLESS NOTED OTHERWISE.
 - 7e. ALL PAINTABLE DOORS VISIBLE TO CUSTOMERS TO BE PAINTED PER PT-60C UNLESS FACTORY FINISH OR U.N.O.
 - 7f. ALL CORRIDORS TRAVERSED BY, OR VISIBLE TO CUSTOMERS TO BE PAINTED PER PT-10.
 - 7g. ALL FRONT, BACK AND UNDERSIDE OF SIGNAGE TO BE PAINTED COLOR AS INDICATED.
 - 7h. GENERAL CONTRACTOR SHALL PROVIDE CONTRACT DOCUMENTS FOR SPECIFIC PAINT CALL OUTS.
 8. WAINSCOT LOWER PANEL PRESTATION NOTES
 - 8a. WHETHER WAINSCOT IS NEW OR REPLACED IS TO BE DETERMINED BY CLIENT PROJECT MANAGER. GENERAL CONTRACTOR TO PROVIDE AND INSTALL NEW WAINSCOT PER FINISH DRAWINGS U.N.O. IF EXISTING WAINSCOT IS TO REMAIN THEN IT IS THE RESPONSIBILITY OF THE G.C. TO PATCH AND REPAIR AS NEEDED.
 - 8b. IF IN PERMANENT SCENE GENERAL CONTRACTOR TO PROVIDE AND INSTALL WAINSCOT EXPOSED MEANING NOT HAVING PERMANENT CASES, SHELVING, ETC. IN FRONT OF THEM.
 - 8c. ALL CORRIDORS TRAVERSED BY, OR VISIBLE TO CUSTOMERS TO RECEIVE WAINSCOT AND WAINSCOT TO 2'-6" A.F.F.
 9. LIGHTING NOTES
 - 9a. ARCHITECT IS RESPONSIBLE FOR COMPLIANCE WITH ALL LIGHTING AND ENERGY CODES.
 - 9b. GENERAL CONTRACTOR SHALL COORDINATE ALL LIGHTING WITH THE CLIENT PROJECT MANAGER.
 - 9c. DRAWER SCOPE OF WORK REGARDING LIGHTING IS LIMITED TO ACCENT LIGHTING LAYOUT ON PLANT 1.3.1 TO LIGHT DECOR ONLY.
 - 9d. GENERAL CONTRACTOR TO INSTALL AND HARDWARE OWNER PROVIDED ACCENT LIGHT FIXTURES IN DESIGNATED LOCATIONS.
 10. DECOR NOTES
 - 10a. DECOR INSTALLATION CONTRACTOR TO FIELD VERIFY ALL WALL DECOR DIMENSIONS PRIOR TO INSTALLATION. BEING ANY MAJOR DISCREPANCIES TO IMMEDIATE ATTENTION OF CLIENT PROJECT MANAGER.
 - 10b. GENERAL AISLE DIRECTORY SLOGANS AND IN-CISE BRACKETS TO BE PROVIDED BY C.I.P. AND INSTALLED BY CLIENT.
 - 10c. DJFAB SHALL PROVIDE CARING AND MISCELLANEOUS HARDWARE FOR DECOR INSTALLATION. THE CONTRACTOR RESPONSIBLE FOR DECOR INSTALLATION SHALL PAINT EXPOSED SUPPORTS, BRACKETS AND FASTENERS TO MATCH ADJACENT SURFACE.
 - 10d. DECOR INSTALLATION CONTRACTOR SHALL PROVIDE CONDUIT OR UN-STRUT AS NEEDED FOR DECOR INSTALLATION. NOTHING TO BE ATTACHED TO ROOF DECK OR CEILING GRID.
 - 10e. DECOR INSTALLATION CONTRACTOR TO PROVIDE AND APPLY PAINT FOR STENCILED WALL DECOR USING PAINT MASS PROVIDED BY DJFAB.

d fab
DESIGN FABRICATIONS

1100 EAST MANDPINE AVE.
SUITE 100
MADISON HEIGHTS, ME 48071
T 508.965.9440
F 248.597.0989
designers@dfabdesign.com

COPYRIGHT © 2019

ALL DRAWINGS AND DESIGNS ARE THE SOLE PROPERTY OF DESIGN FABRICATIONS, INC. THESE DRAWINGS WERE PREPARED EXCLUSIVELY FOR THIS PROJECT. IT IS ILLEGAL FOR UNAUTHORIZED PERSONS TO USE THESE DRAWINGS OR PORTIONS FOR ANY OTHER PROJECT.

DO NOT SCALE DRAWINGS - USE FIGURED DIMENSIONS ONLY.


OVERHEAD DECOR PLAN

PROJECT NAME: KROGER GA-478
PROJECT LOCATION: 3162 JOHNSON FERRY ROAD, MARIETTA, GA

ISSUED FOR	DATE
80% REVIEW	03/22/19


NO.	REVISED BY	DATE
1	XXX	XXX

DRAWN: BP / RA
CHECKED: CW
SCALE: 3/32" = 1'-0"
JOB NO.: NA
SHEET #

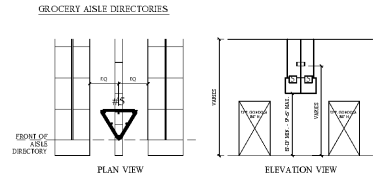

1. AISLE DIRECTORIES IN GROCERY AISLES - THE FRONT POINT IS TO ALIGN WITH THE END OF THE SHELVING, AT THE BACK OF THE END CAP. ALL AISLE DIRECTORIES ARE TO HANG IN THE CENTER OF THE AISLE.
2. AISLE DIRECTORY IS TO BE AT 8'-0" A.F.F. MIN. - UP TO 9'-6" A.F.F. MAX WHERE CLEARANCE ALLOWS UNDER LIGHTING. MUST MAINTAIN MIN. OF 6" BTW TOP OF A/D AND BTM OF LIGHT FIXTURE.

DETAIL 05a - MAIN SALES AISLE DIRECTORIES
SCALE: 1/8" = 1'-0"

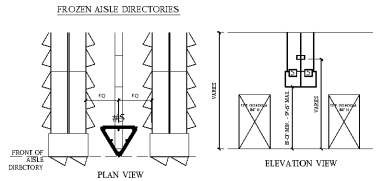

1. AISLE DIRECTORIES IN FROZEN AISLES - THE FRONT OF THE AISLE DIRECTORY IS TO ALIGN WITH THE FRONT OF THE END UNITS. ALL AISLE DIRECTORIES ARE TO HANG IN THE CENTER OF THE AISLE.
2. AISLE DIRECTORY IS TO BE AT 8'-0" A.F.F. MIN. - UP TO 9'-6" A.F.F. MAX WHERE CLEARANCE ALLOWS UNDER LIGHTING. MUST MAINTAIN MIN. OF 6" BTW TOP OF A/D AND BTM OF LIGHT FIXTURE.

DETAIL 05b - FROZEN AISLE DIRECTORIES
SCALE: 1/8" = 1'-0"

Order Plans