


DOOR SCHEDULE										
Door Number	Elevation	Door				Frame		Fire Rating	Comments	
		Width	Height	Material	Finish	Material	Finish			
200	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	REQUIRES LEAD LINING, REUSE EXIST'G DOORS IF POSSIBLE
201	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	REQUIRES LEAD LINING, REUSE EXIST'G DOORS IF POSSIBLE
205	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	REQUIRES LEAD LINING, PROVIDE BATTERY KEY PAD
206	A	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	
207	A	3'-0"	7'-0"	PLAM-4/ GLASS	STAIN	A	HM	PNT	0HR	
208	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	REQUIRES LEAD LINING, REUSE EXIST'G DOORS IF POSSIBLE
209	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	REQUIRES LEAD LINING, REUSE EXIST'G DOORS IF POSSIBLE
210	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	
212	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	
213	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	
214	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	
214	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	
215	A	3'-0"	7'-0"	PLAM-4/ GLASS	STAIN	A	HM	PNT	0HR	
216	A	3'-0"	7'-0"	PLAM-4/ GLASS	STAIN	A	HM	PNT	0HR	
218	B	3'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	
221	B (PAIR)	8'-0"	7'-0"	PLAM-4	STAIN	A	HM	PNT	0HR	ELECTRICAL ROOM

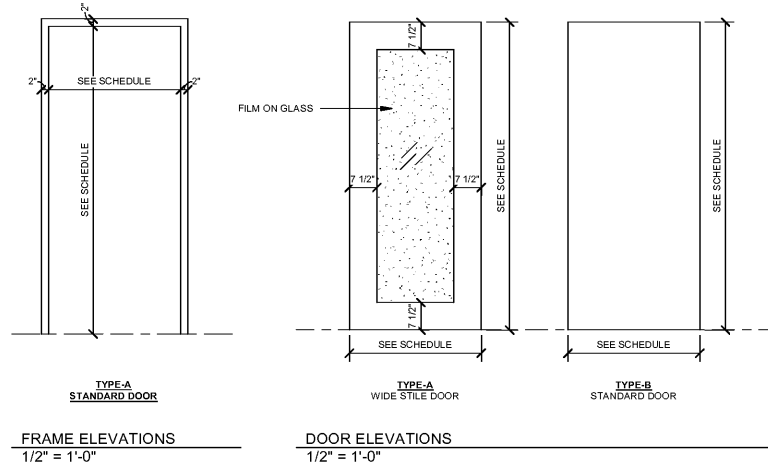

**DOOR NOTES**

1. ALL METAL DOOR FRAMES TO BE WELDED AT SEAMS AND ALL SEAMS TO BE GROUND SMOOTH.
2. ALL METAL DOOR FRAMES TO HAVE A MIN OF 3 ANCHOR BOLTS PER JAMB
3. COORDINATE HARDWARE NEEDS WITH TENANT

**DOOR HARDWARE**

- SET #1:** PASSAGE SET  
 - 1 1/2 PR, 4 1/2 x 4 1/2 HINGES  
 - PASSAGE FUNCTION LOCKSET
- SET #2:** STOREROOM SET  
 - 1 1/2 PR, 4 1/2 x 4 1/2 HINGES  
 - 1 EA. CLOSER  
 - STORAGE FUNCTION LOCKSET
- SET #3:** OFFICE SET  
 - 1 1/2 PR, 4 1/2 x 4 1/2 HINGES  
 - 1 EA. OFFICE LEVER  
 - OFFICE FUNCTION LOCKSET
- SET #4:** PRIVACY FUNCTION SET  
 - 1 1/2 PR, 4 1/2 x 4 1/2 HINGES  
 - 1 EA. PRIVACY LEVER  
 - 1 EA. CLOSER
- SET #5:** PASSAGE FUNCTION  
 - 1 1/2 PR, 4 1/2 x 4 1/2 HINGES  
 - 1 EA. PASSAGE LEVER  
 - 1 EA. CLOSER





**NOTE:**  
 1. ALL HARDWARE TO HAVE BRUSHED STAINLESS STEEL FINISH.  
 2. COORDINATE ELECTRONIC LOCKING REQUIREMENTS WITH TENANT AND BUILDING OWNER.

FINISH SCHEDULE											
NUMBER	NAME	FLOOR	BASE	NORTH WALL	SOUTH WALL	EAST WALL	WEST WALL	CASEWORK	COUNTER TOPS	CEILING FINISH	COMMENTS
200	CT/ PET	LVT-1	RB-1	PNT-1	PNT-1	PNT-2	PNT-1			ACT-1	
201	CT EQUIP	CONC	RB-1	PNT-1	PNT-1	PNT-1	PNT-1			ACT-1	
203	TECH	LVT-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1		PLAM-2	ACT-1	
205	HOT LAB	LVT-1	RB-1	PNT-2	PNT-1	PNT-1	PNT-1	PLAM-1	SS-2	ACT-1	
206	READING	LVT-1	RB-1	PNT-2	PNT-2	PNT-2	PNT-2	PLAM-1	PLAM-2	ACT-1	
207	NURSE	LVT-1	RB-1	PNT-2	PNT-2	PNT-2	PNT-2	PLAM-1	PLAM-2	ACT-1	
208	QUIET ROOM	LVT-1	RB-1	PNT-3	PNT-3	PNT-3	PNT-3			ACT-1	
209	QUIET ROOM	LVT-1	RB-1	PNT-3	PNT-3	PNT-3	PNT-3			ACT-1	
210	HC TL	LVT-1	RB-1	WG-1, PNT-1	PNT-1	PNT-1	PNT-1			GYP BD	
211	CT/ EMG WAITING	LVT-1	RB-1	PNT-1	PNT-1	PNT-2	PNT-2	PLAM-1	PLAM-2	ACT-1	
212	EMG EXAM 3	LVT-1	RB-1	PNT-2	PNT-3	PNT-2	PNT-2	PLAM-1	PLAM-2	ACT-1	
213	EMG EXAM 2	LVT-1	RB-1	PNT-2	PNT-3	PNT-2	PNT-2	PLAM-1	PLAM-2	ACT-1	
214	EMG EXAM 1	LVT-1	RB-1	PNT-2	PNT-3	PNT-2	PNT-2			ACT-1	
215	CONFERENCE ROOM	LVT-1	RB-1	PNT-2	PNT-3	PNT-2	PNT-2			ACT-1	
216	WORK AREA	LVT-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	PLAM-1	PLAM-2	ACT-1	
217	OPEN OFFICE	LVT-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1	PLAM-1	PLAM-2	ACT-1	
218	OFFICE MGR	LVT-1	RB-1	PNT-2	PNT-2	PNT-2	PNT-2	PLAM-1	PLAM-2	ACT-1	
219	RECEPTION	LVT-1	RB-1	PNT-2	PNT-1	PNT-1	PNT-1	PLAM-1	SS-1	ACT-1	
220	CT/ EMG HALL	LVT-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1			LVT-1	
221	ELEC CLOS	LVT-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1				
222	CLOSET	LVT-1	RB-1	PNT-1	PNT-1	PNT-1	PNT-1				
232	EXIST'G SERVERS	NOT IN SCOPE									
E1	EXIST'G VESTIBULE	NOT IN SCOPE									
E2	EXIST'G OFFICE	NOT IN SCOPE									
E3	EXIST'G BREAK RM	NOT IN SCOPE									
E5	EXIST'G IT	NOT IN SCOPE									
E6	EXIST'G LAB	NOT IN SCOPE									
E7	COMPUTER SERVERS	NOT IN SCOPE									
E8	COMPUTER SERVERS	NOT IN SCOPE									
E9	EXIST'G LINEN	NOT IN SCOPE									

**FINISH NOTES:**  
 1. ALL WALLS TO BE PNT-1 UNLESS NOTED OTHERWISE

FINISH INFORMATION					
MATERIAL	DESCRIPTION	MANUFACTURER	PATTERN/ PRODUCT NAME	COLOR	COMMENTS
ACT-1	ACOUSTICAL CEILING TILE- 24" X 24" X 5/8"	ARMSTRONG	DUNE 1774	WHITE	15/16" ANGLED TEGULAR
GYP BD	M.R. GYP BD (TOILET RM. CEILINGS)	SHERWIN WILLIAMS		EXTRA WHITE (SW 7006)	FLAT SHEEN
LVT-1	LUXURY VINYL TILE	SHERWIN WILLIAMS	TEXTURED WOODGRAINS	DISTRESSED WALNUT (A00401)	ASHLAR PATTERN
PLAM-1	PLASTIC LAMINATE CABINETRY	NEVAMAR	PREMIUM LAMINATE, SOFTGRAIN FINISH	SKYLINE WALNUT (7964K-12)	WHITE MELAMINE CABINET INTERIORS
PLAM-2	PLASTIC LAMINATE COUNTER	FORMICA	ETCHINGS FINISH	MOCHA TRAVERTINE (3456-46)	
PLAM-3	PLASTIC LAMINATE CABINETRY	NEVAMAR	ARMORED PROTECTION, TEXTURED	BLACK PEARL (S6014T)	
PLAM-4	PLASTIC LAMINATE DOORS				COORD WITH TENANT
PNT-1	PAINT, TYPICAL WALL	SHERWIN WILLIAMS		NATURAL CHOICE (SW 7011)	SATIN
PNT-2	PAINT, ACCENT COLOR	SHERWIN WILLIAMS		MINDFUL GRAY (SW 7016)	SATIN
PNT-3	PAINT, ACCENT COLOR	SHERWIN WILLIAMS		DELFT (SW 9134)	SATIN
PNT-4	PAINT, TRIM DOORS & FRAMES	SHERWIN WILLIAMS		GAUNTLET GRAY (SW 7019)	SATIN
RB-1	4" RUBBER BASE	FLEXCO		UMBER (078)	
SS-1	SOLID SURFACE COUNTER TOP	CORIAN		WILLOW	
SS-2	SOLID SURFACE COUNTER TOP (QUARTZ)	CORIAN QUARTZ	ZODIAC	STORMY GREY	
WG-1	48" X 96" TEXTURED MDF WALL PANEL, RECEPTION BACK WALL	SOELBERG INDUSTRIES	COLONNA, CLASSIC COLLECTION	OAK PALOMINO	VERTICAL PATTERN ORIENTATION
TWP-1	48" X 96" TEXTURED WOOD WALL PANEL, RECEPTION FRONT PANEL	SOELBERG INDUSTRIES	ONDA ONE, CLASSIC COLLECTION	OAK PALOMINO	HORIZONTAL PATTERN ORIENTATION
WG-1	WALL GUARD- 5" WAINGCOT	INPRO		STERLING (0283)	
WG-2	CORNER GUARD	INPRO		EGGSHELL (0111)	

Order Plans @ WWW.WWJDDIline.com

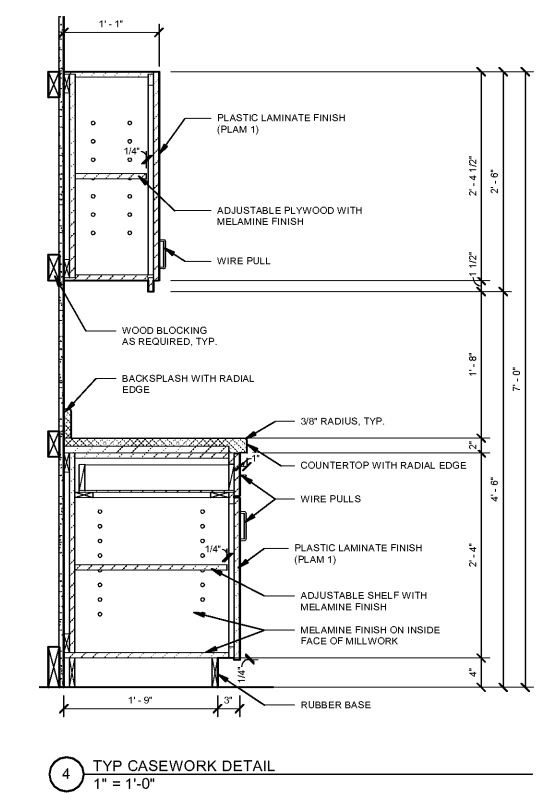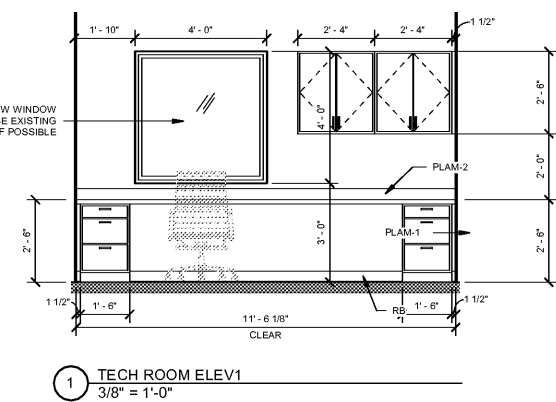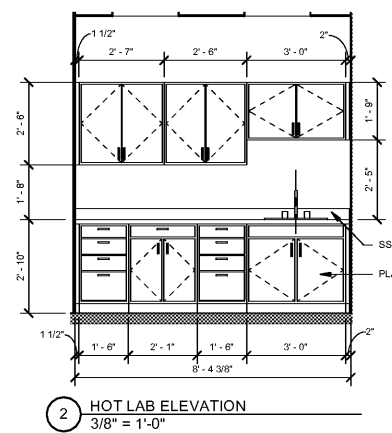

EXPIRATION DATE:  
 COPYRIGHT NOTICE  
 THE DRAWINGS ARE THE PROPERTY OF RIVER STREET ARCHITECTURE LLC. ANY REUSE, REPRODUCTION, DISPLAY OR SALE OF THESE DRAWINGS WITHOUT THE EXPRESS WRITTEN CONSENT OF THE ARCHITECT IS STRICTLY PROHIBITED.

**river street**  
 ARCHITECTURE  
 123 E 7th street, suite 400 chattanooga, tennessee 37402  
 P-423 634 0806 www.riverstreetarchitecture.com

RENOVATION + PET/CT PROJECT  
**PRIMEIMAGING**  
 CHATTANOOGA OUTPATIENT CENTER  
 1301 MCCALLIE AVE., CHATTANOOGA TN 37404

Revision Schedule		
Rev. #	Rev. Date	Revision Description

Release Date: 05.03.2019  
 Project No.: 19010  
 SCHEDULES + ELEVATIONS