



- NOTES:
- STAKING AS REQUIRED
 - PLANT SO THAT TOP OF ROOT BALL IS EVEN WITH THE FINISHED GRADE
 - STAKE ABOVE FIRST BRANCHES OR AS NECESSARY FOR FIRM SUPPORT
 - PAINT ALL CUTS OVER 1" DIAM.
 - FLAG ALL GUYING WIRES WITH SURVEYING TAPE



TREE PLANTING—STRAPS DETAIL


NOT TO SCALE

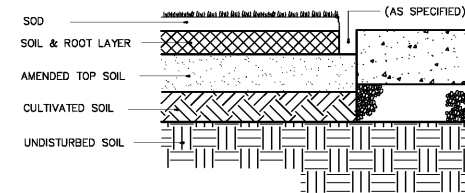

- SODDING PROCEDURE:
1. THE GENERAL CONTRACTOR WILL PROVIDE GRADES TO .2 OF A FOOT OF PROPOSED GRADES.
 2. SPREAD 3" OF TOPSOIL, CULTIVATE ENTIRE AREA TO 4-6" DEPTH AND HAND RAKE TO ACHIEVE SMOOTH SURFACE.
 3. APPLY LIME AND FERTILIZER TO TOPSOIL (AS PER SPECIFICATIONS) AND SPREAD OVER CULTIVATED SOIL AREA. HAND RAKE TO SMOOTH FINISHED GRADE.
 4. THOROUGHLY WATER AREA TO BE SODDED PRIOR TO INSTALLATION.
 5. LAY SOD, ROLL AND WATER THOROUGHLY.


SOD INSTALLATION DETAIL

NOT TO SCALE

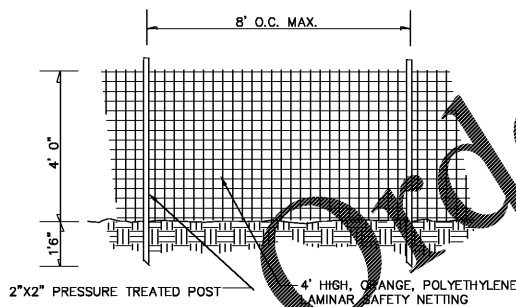

TREE PROTECTION FENCE

NOT TO SCALE

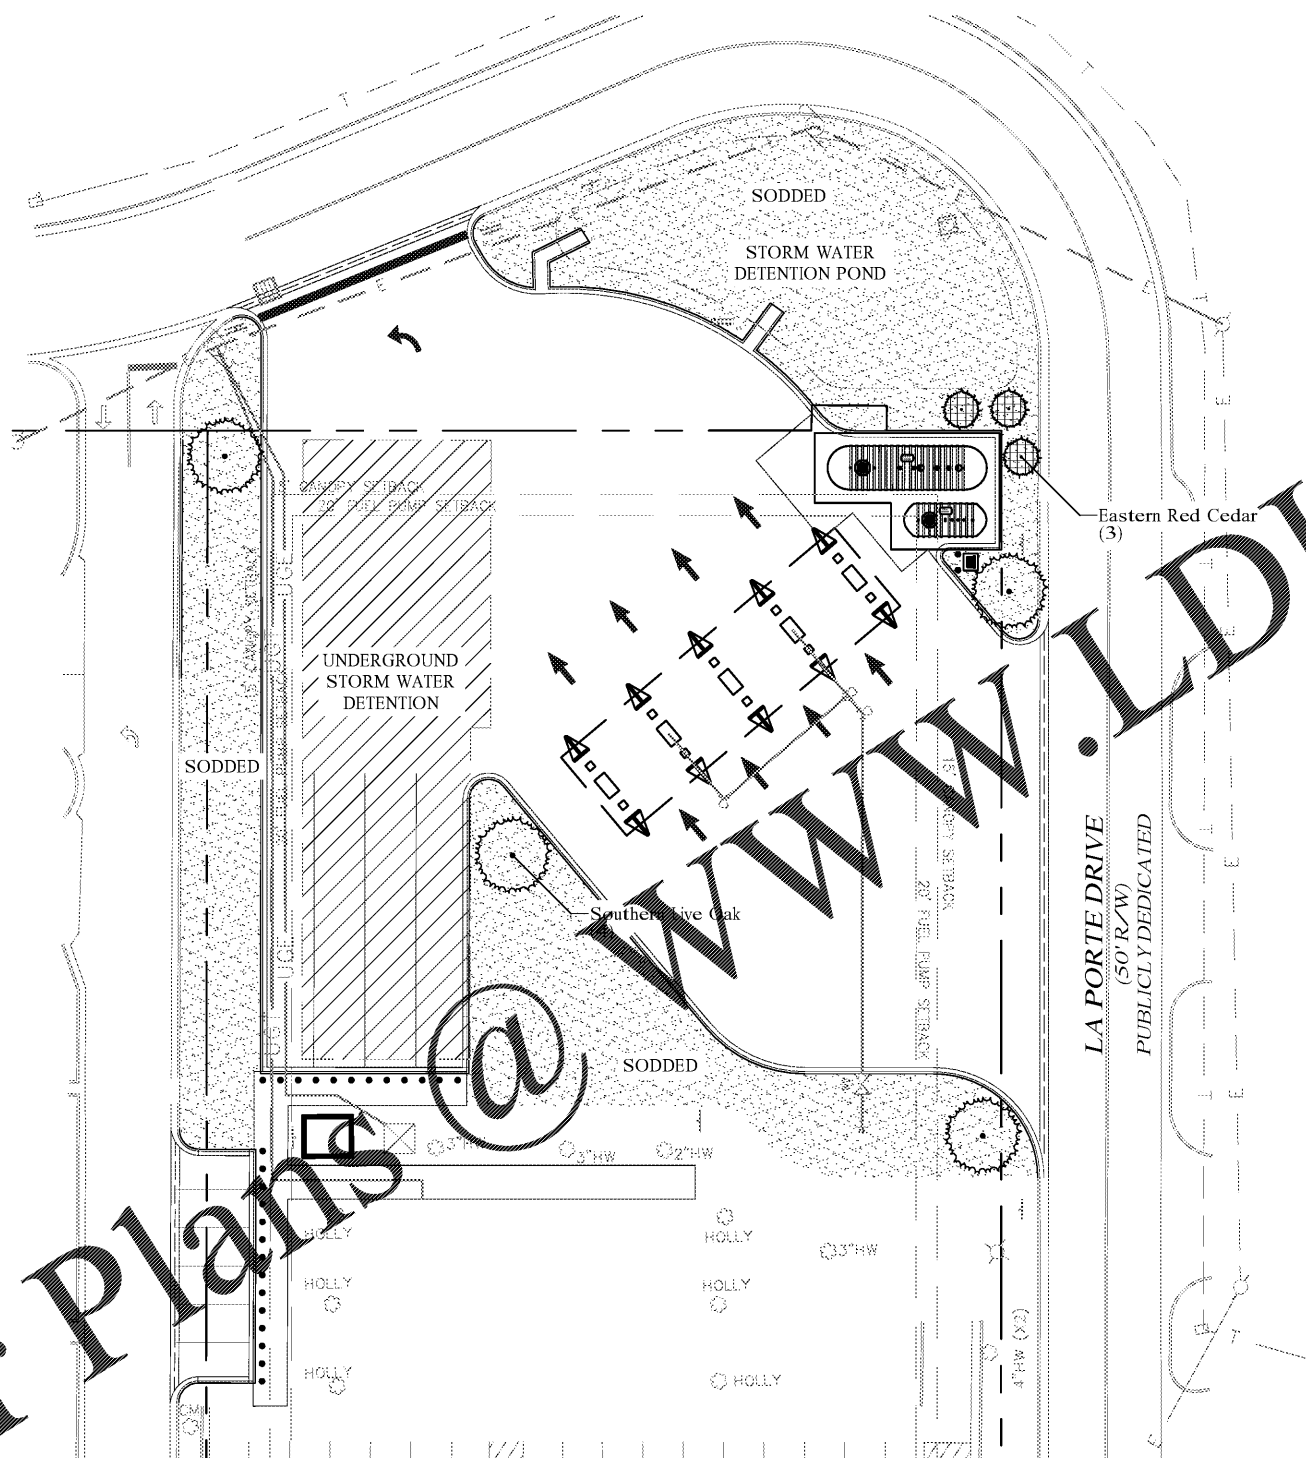

PLANT SCHEDULE

TREES	BOTANICAL / COMMON NAME	CONT	SIZE	QTY
	Juniperus virginiana / Eastern Red Cedar Full to the ground	B & B	2" cal./6' ht.	3
	Quercus virginiana / Southern Live Oak Matching Specimens	B & B	2.5" cal./12' ht.	4
GRASSED AREAS	BOTANICAL / COMMON NAME	SIZE	SPACING	QTY
	Cynodon dactylon 'Tift 419' / Tift 419 Hybrid Bermuda	sod		14,551 sf

LANDSCAPE PLANTING:

The landscape contractor shall familiarize himself with the site conditions and verify them to his satisfaction. The landscape contractor shall accept the site conditions and do the work specified without additional compensation for possible variation from grades and conditions shown.

Prior to construction the landscape contractor shall be responsible for locating all underground utilities and shall avoid damage to all utilities during construction. Should the landscape contractor cause damage to any utilities, he shall make necessary repairs as quickly as practicable without additional compensation.

All plant material sizes and measurements, including trunk, head and spread sizes, container and rootball sizes, quality and condition shall conform to the standards set forth in the current issue of "American Standards for Nursery Stock" (ANSI Z60.1).

All plant material are subject to the approval by the owner, and may be inspected at the place of growth or at site before planting.

The landscape contractor shall be responsible for maintaining in full all landscape planting work (including watering, spraying for insects and diseases, mulching, mowing, fertilizing, cultivation, edging and weeding) during installation and until acceptance by the owner.

The landscape contractor shall completely guarantee all landscape planting work and materials for a period of one (1) year from the date the work has been approved by the owner as installed. All plant material not in a healthy growing condition shall be removed immediately and replaced as soon as practicable with like kind at no charge to the owner.

The landscape contractor shall be responsible for obtaining soil samples from top soil and native or fill soils at the site and submitting them to an approved soil testing laboratory, and obtain analyses and recommendations for amending these soils and fertilization of specified plant material.

All planting areas, shrub beds and trees shall be mulched with a minimum compacted depth of three (3) inches of mulch as specified. Prior to mulching apply a pre-emergent herbicide (approved by the owner) as recommended by the manufacturer, to prevent recurring weed and grass growth.

All disturbed areas of the site shall be either grassed or planted immediately after grading in order to prevent soil erosion. A permanent vegetation cover shall be provided throughout all unpaved areas of the site, adjacent disturbed areas and right-of-way (R.O.W.). All work within any R.O.W. shall conform to standards and specifications of local and/or state jurisdictions.

GRASSING:

All disturbed areas shall receive 4" minimum of topsoil (compacted) and grassed with sod as indicated on the plan.

Sodded areas shall be grassed with 'Tift 419' Hybrid Bermuda sod. Sod shall be laid with close, tight fitting joints, which shall be laid in rows parallel to the contour contour lines. All sodded areas shall be rolled to achieve a smooth, uniform lawn and top dressed with sand.

Fertilization and soil amendments for all grassed areas shall be as per laboratory analysis. Hydroseeding may be substituted for mechanical seeding by mixing seed, fertilizer and pulverized mulch in water, using equipment specifically designed for hydroseed application. Mix until uniformly blended into homogeneous slurry suitable for hydraulic application. Apply uniformly at a rate as required to obtain specified seeding rate.

TREES:


All trees located in grassed areas shall be planted as per detail and mulched with at least four (4) foot diameter shredded hardwood mulch.

Trees shall be planted no closer than five (5) feet from back-of-curb.



LANDSCAPE PLAN

GRAPHIC SCALE



DAVID ALBRIGHT & ASSOCIATES, INC.
PLANNERS & LANDSCAPE ARCHITECTS
78 LAGRANGE STREET
NEWMAN, GEORGIA 30263
E-MAIL: DAVID@ALBRIGHTAL.COM
TEL: (404) 862-0390



Project Title
CIRCLE K DIESEL EXPANSION
CORDELE, GA (CRISP COUNTY)
BY: CIRCLE K - SOUTH ATLANTIC DIVISION
WAYCROSS, GA 31501

REVISIONS	BY

DRAWN BY dfa
CHECKED BY dfa
DATE: 08/28/2020
SCALE:
JOB No. 20-101
SHEET NUMBER

L-1