HUDDLE HOUSE

EVO 2000 RESTAURANT

40 US HWY 84 CAIRO, GA

GRADY CO. 39828

ARCHITECTURAL SYMBOLS

- DRAWING TITLE: SHEET DESIGNATION — DRAWING I.D. NUMBER; DRAWING SCALE; SCALE: XXX
- DETAIL (ENLARGEMENT): DETAIL I.D. NUMBER; SHEET WHERE DETAIL IS LOCATED (XX.X); AREA TO BE ENLARGED
- COLUMN LINE DESIGNATION: (#) COLUMN LINE
- WALL SECTION: SECTION I.D. NUMBER; SHEET WHERE SECTION IS LOCATED (AX.X)
- ELEVATION HEIGHT: 100'-0" A.F.F. TOP OF SLAB — ELEVATION HEIGHT; REFERENCE POINT
- (XX) INTERIOR PARTITION TYPE
- SECTION: SECTION I.D. NUMBER; SHEET WHERE SECTION IS LOCATED (AX.X)
- KEYED NOTES: KEYED NOTE DESIGNATION ON APPLICABLE SHEET
- 3/4" — TO FRAMING; TO FACE OF FINISH SURFACE OR FACE OF BLOCK
- ELEVATION: ELEV. I.D. NUMBER; SHEET WHERE ELEV. IS LOCATED (X/AX.X)
- DOOR NUMBER: DOOR NUMBER DESIGNATION (w/NUMBER)
- 3/4" — TO CENTERLINE OR COLUMN GRID
- REVISIONS: REVISION NUMBER; REVISED AREA CLOUDED
- WINDOW DESIGNATION: WINDOW DESIGNATION (w/ LETTER)
- ROOM NAME: NAME — ROOM NAME; XXX — ROOM NUMBER
- FINISH MATERIAL: XX-XX — FINISH DESIGNATION; TRIM ONLY — COMMENTS, IF APPLICABLE
- REFER TO MECHANICAL, PLUMBING AND ELEC. DWGS FOR SYMBOLS AND LEGENDS PERTAINING TO THESE DISCIPLINES.

VICINITY MAP

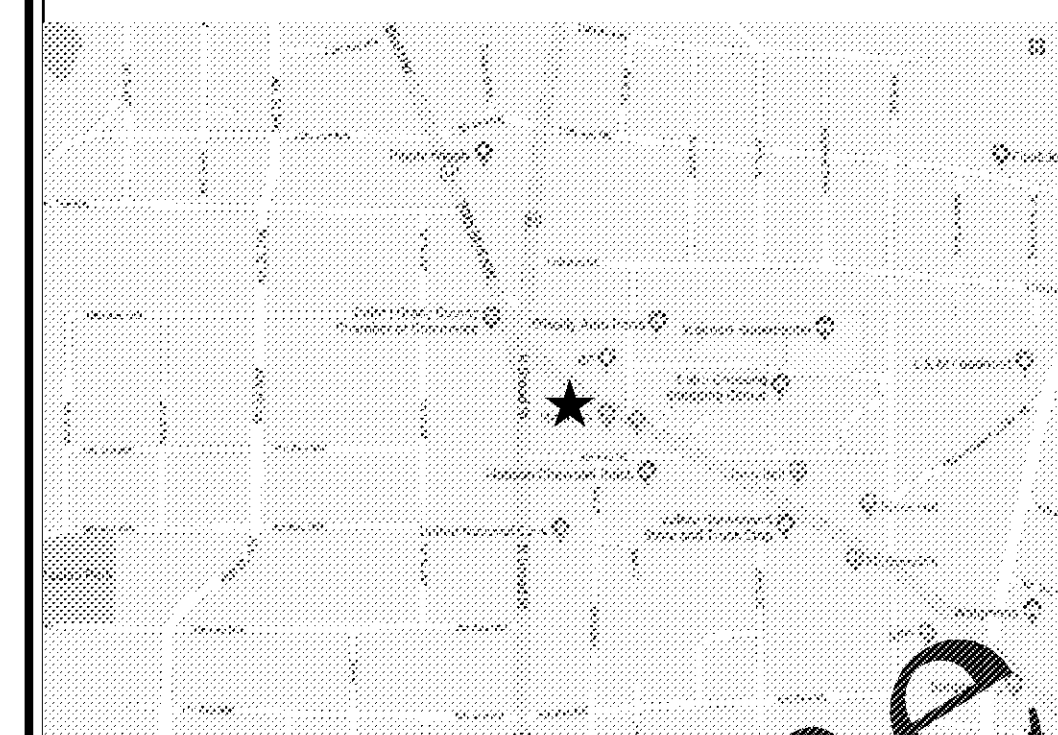

GENERAL NOTES

1. DETAILS OF CONSTRUCTION SHALL CONFORM WITH THE REFERENCED EDITION OF THE BUILDING CODE & LOCAL PRESIDING BUILDING CODES & LEGAL REQUIREMENTS
2. THE GENERAL CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE DESIGN, ADEQUACY, & SAFETY OF ERECTION BRACING, SHORING & TEMPORARY SUPPORTS, ETC.; THE GENERAL CONTRACTOR IS RESPONSIBLE FOR THE STABILITY OF THE STRUCTURE PRIOR TO THE APPLICATION OF SHEAR WALLS, ROOF SHEATHING, STRUCTURAL ELEMENTS & FINISH MATERIALS.
3. THE GENERAL CONTRACTOR SHALL FIELD VERIFY DIMENSIONS, LOCATION OF NEW FRAMING MEMBERS, LINES OF SUPPORT, LOCATIONS OF ANCHOR BOLTS, HOLD DOWNS, EXISTING SITE CONDITIONS & UTILITIES PRIOR TO ORDERING MATERIALS.
4. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION, DEMOLITION MEANS & METHODS ON THE PROJECT. THE OWNER & HIS CONSULTANTS SHALL NOT BE RESPONSIBLE FOR HOW THE WORK IS PERFORMED, SAFETY OR NEGLIGENT ACTS OR OMISSIONS BY THE GENERAL CONTRACTOR OR THE SUBCONTRACTORS ON THE JOB.
5. THE GENERAL CONTRACTOR SHALL ENSURE THAT MATERIALS, AS REQUIRED BY CODE, ARE TESTED BY INDEPENDENT LABORATORIES & THAT RESULTS ARE FURNISHED TO LOCAL BUILDING AUTHORITIES, OWNER & THE PROJECT CONSULTANTS IF REQUESTED.
6. ANY CHANGES TO THE DESIGN, AFTER ISSUANCE OF A BUILDING PERMIT, SHALL BE SUBMITTED BY THE GENERAL CONTRACTOR TO THE PRESIDING BUILDING AGENCY & HUDDLE HOUSE FOR APPROVAL.
7. DOCUMENTS MARKED "BID DOCUMENTS" SHALL NOT BE USED FOR CONSTRUCTION.
8. EQUIPMENT IS INCLUDED FOR REFERENCE ONLY. CONTACT HUDDLE HOUSE FOR CURRENT EQUIPMENT LIST. CONFIRM SIZE & LOCATION OF EQUIPMENT CONNECTION WITH MFR'S. CURRENT CUT SHEETS.
9. DIMENSIONS ARE FROM FACE OF FRAMING UNLESS NOTED OTHERWISE; "CLEAR" DENOTES A DIMENSION TO WALL FINISHES.
10. INTERIOR WALL TYPES SHALL BE AS NOTED ON SHEET A100
11. EXTERIOR WALLS SHALL BE 2x6 WOOD STUDS (U.N.O.) AT 16" O.C.
12. SEE FOOD SERVICE DRAWINGS (A700 SERIES) FOR EQUIPMENT LOCATIONS, ADDITIONAL INFORMATION & REQUIREMENTS.
13. RESTROOM WALLS SHALL HAVE SOUND ATTENUATION BATTS.
14. FURNISH & INSTALL SOLID BLOCKING AT MOUNTING LOCATIONS FOR WALL & CEILING ACCESSORIES, FIXTURES & EQUIPMENT.
15. DEFERRED SUBMITTALS SHALL BE SUBMITTED TO THE ARCHITECT & HUDDLE HOUSE FOR REVIEW. THE ARCHITECT SHALL PROVIDE A NOTATION TO THE GC INDICATING THAT THE SUBMITTAL DOCUMENTS HAVE BEEN REVIEWED & FOUND TO BE IN GENERAL CONFORMANCE WITH THE DESIGN OF THE BUILDING. DEFERRED SUBMITTAL ITEMS MUST THEN BE SUBMITTED TO THE BUILDING OFFICIAL. THESE ITEMS SHALL NOT BE INSTALLED UNTIL THEIR DESIGN HAS BEEN APPROVED BY THE BUILDING OFFICIAL. DEFERRED SUBMITTALS ARE AS FOLLOWS:
    1. TRUSS DRAWINGS AND CALCULATIONS
    2. EXHAUST HOOD AUTOMATIC FIRE EXTINGUISHING SYSTEM
    3. ALARM MONITORING SYSTEM (AS REQUIRED)
16. UNLESS NOTED OTHERWISE, PROVIDE EIFS JOINT SPACING FOLLOWING THE PORTLAND CEMENT PLASTER/STUCCO MANUAL, EB049, BASED ON ASTM C1063 STANDARD SPECIFICATION FOR THE INSTALLATION OF LATHING AND FURRING TO RECEIVE INTERIOR AND EXTERIOR PORTLAND-CEMENT BASED PLASTER REQUIREMENTS.

    GENERALLY, JOINT SPACING SHOULD MEET THESE CRITERIA:

    1. JOINT SPACING SHOULD NOT BE GREATER THAN 18 FEET.
    2. NO PANEL SHOULD EXCEED 144 SQ.FT. ON VERTICAL APPLICATIONS.
    3. NO PANEL SHOULD EXCEED 100 SQ. FT. OVER CURVED OR ANGULAR SECTIONS.
    4. NO LENGTH-TO-WIDTH RATIO SHOULD EXCEED 2½ TO 1 IN ANY GIVEN PANEL.

Huddle House Vendor Directory

Category	Item	Supplier	Contact	Phone Number	Email	Notes
Equipment/ Smallwares						
Owner Order Other set in Place GC Final Connect	Kitchen Equipment	Concept Services	John Johnson Robin Bigham	(512) 343-3100	johnjohnson@conceptserv.com rbigham@conceptserv.com	Email a CAD or PDF file of the seating, equipment plan & equipment schedule to John or Robin to quote the package. **GC to receive and install Hood and Walk-in units.**
Lighting						
GC Order & Install	Store Lighting Package	Hermitage Lighting	Todd Humes	(615) 843-3380 office (615) 336-0237 Cell	thumes@hermitagelighting.com	Email a PDF file of the lighting plan & fixture schedule to Todd to quote the package.
Interior Décor Package						
Owner Order GC Install	Décor	Nite-Bright	Sheila Double	(800) 535-0002	sdouble@nitebright.com	Email plan and exterior elevations to Sheila Or Contact HH Project Manager for ordering assistance.
Seating & Furniture						
Owner Order Others install	Chairs, Barstools, Booths, Banquettes, Table Tops, & Table Bases	Concept Services	John Johnson Robin Bigham	(512) 343-3100	johnjohnson@conceptserv.com rbigham@conceptserv.com	Email a CAD or PDF file of the seating, equipment plan & equipment schedule to John or Robin to quote the package through the HH seating vendors.
Millwork Package						
Owner Order Others install	Millwork Package	Concept Services	John Johnson Robin Bigham	(512) 343-3100	johnjohnson@conceptserv.com rbigham@conceptserv.com	Email a CAD or PDF file of the seating, equipment plan & equipment schedule to John or Robin to quote the package through the HH millwork vendors.
Ceiling						
GC Order & Install	Ceiling Grid and Tile	Armstrong	L[illegible]is John	(800) 442-4212	ljjohn@armstrong.com	Email a CAD or PDF file of the reflected ceiling plan.
Walls						
GC Order & Install	Wainscot/Chair Rail/Kitchen FRP/Decorative Wall Panels	Marlite	Anita Craig	(423) 506-6335	acraig@Marlite.com	Contact Anita for a copy of the Marlite order form with HH pricing
GC Order & Install	Quilted Stainless Steel (cook line)	Stainless Supply	Bart Stucky	(877) 484.0088	www.stainlesssupply.com	Go online to order direct from website. Order 2.82" Stainless Steel Embossed Diamond Pattern
Flooring						
GC Order & Install	Dining, Restrooms, Kitchen	Specialty Tile	Cynthia Sierra	407-624-7911	csierra@specialtytile.com	Email a CAD or PDF of the finish floor plan and restroom elevations.
Exterior Signage						
Owner Order GC Coordinate Delivery	Round tower sign, building channel letters, pylon signs, awnings and canopies	IMG	Eddie Jarrard	(770) 527-3032	ejarrard@imgarchitectural.com	Email plan and exterior elevations to Eddie Contact HH Project Manager for ordering assistance.
		SignCo America	Gloria Baker	(281) 940-2915	gloria.baker@signcoamerica.com	Email plan and exterior elevations to Gloria Contact HH Project Manager for ordering assistance.
HVAC						
	HVAC Units & Controls	NCA Consultants	Chris Witts	(727) 530-0078	cwitts@ncaconsultants.com	
Miscellaneous						
Owner Order	Window Blinds	Roll-A-Shade	Priscilla Slanina		priscilla.slanina@rollashade.com	Contact Priscilla for info required to order new blinds
Owner & HH Rep Order/Coordinate	Soda Equipment	PepsiCo Foodservice	Lyle McCloud	(404) 497-8655	lyle.mccloud@pepsico.com	If this is a new account call at least 8 weeks ahead of opening for contract.
Owner & HH Rep Order/Coordinate	Minute Maid Juice Machine	Coca-Cola	Susanne Duke ***	(404) 414-4697	sduke@coca-cola.com jtoprek@coca-cola.com	*** Call Juanita to set up Equipment 3 weeks out from Training. 800-531-2238 X 3013
Owner & HH Rep Order/Coordinate	Coffee/Tea	Royal Cup	Jamie Johnson	(205) 271-6954	jamie.johnson@royalcupcoffee.com	
Owner & HH Rep Order/Coordinate GC Install	Dish Machine	SSDC	Ana Rodriguez	(800) 532-7732 x 6933	ana.rodriguez@ecolab.com	Call or email Ana to receive a copy of lease contract.
Owner Order- HH Trainer to install	POS	Retail Technology Group (RTG)	Jaimie Davenport	(636) 680-8466	jaimie.davenport@rtgpos.com	
Owner Order	CO2	NuCO	Vince Giordano	(404) 664-6229	vgiordano@nuco2.com	

ABBREVIATIONS

&	AND	GYP.	GYPSUM	SIM.	SIMILAR
@	AT	HB	HOSE BIBB	SPECS	SPECIFICATIONS
Ø	DIAMETER	HDW	HARDWARE	STL.	STEEL
AFF	ABOVE FINISHED FLOOR	HGT.	HEIGHT	T & G	TONGUE AND GROOVE
ALUM	ALUMINUM	HM	HOLLOW METAL	T.G.	TEMPERED GLASS
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE	I.B.G.C.	INSTALLED BY GENERAL CONTRACTOR	THRESH	THRESHOLD
APPROX.	APPROXIMATE, APPROXIMATELY	I.E.	THAT IS	T.O.	TOP OF
B.O.	BOTTOM OF.	INSUL.	INSULATION	TYP	TYPICAL
BD.	BOARD	INT	INTERIOR	U.N.O.	UNLESS NOTED OTHERWISE
BLKG.	BLOCKING	JT.	JOINT	U.O.N.	UNLESS OTHERWISE NOTED
BRG.	BEARING	K.E.S.	KITCHEN EQUIP. SUPPLIER	VCT	VINYL COMPOSITION TILE
CL	CENTERLINE	LB OR #	POUND	VIF	VERIFY IN FIELD
CLG.	CEILING	MTL.	MATERIAL	W/	WITH
CLR.	CLEAR	MAX.	MAXIMUM	W.B.	WEATHER BARRIER
CMU	CONCRETE MASONRY UNIT	MFGR.	MANUFACTUER	WD	WOOD
COL.	COLUMN	MIN.	MINIMUM	WWF	WELD WIRE FABRIC
COLS.	COLUMNS	M.O.	MASONRY OPENING		
CONC.	CONCRETE	MOD	MODIFIED		
CONT.	CONTINUOUS	MTD	MOUNTED		
C.O.	CONTRACTING OFFICER	MTL.	METAL		
D.S.	DOWNSPOUT	M.W.	MILLWORK VENDOR		
DIA.	DIAMETER	NO.	NUMBER		
DISP.	DISPLAY OR DISPENSER.	N/A	NOT APPLICABLE		
DTL.	DETAIL	O.C.	ON CENTER		
E.W.C.	ELECTRICAL WATER COOLER	O.D.	OUTSIDE DIAMETER		
EL.	ELEVATION	OPP.	OPPOSITE		
ELEC.	ELECTRIC, ELECTRICAL.	P. LAM.	PLASTIC LAMINATE		
EQ.	EQUAL	PLYWD.	PLYWOOD		
EQUIP.	EQUIPMENT	P.O.S.	POINT OF SALE		
E.W.C.	ELECTRIC WATER COOLER	PTD	PAINTED		
EXP	EXPANSION	PL	PLATE		
EXT.	EXTERIOR	RECEP.	RECEPTACLE		
F.B.O.	FURNISHED BY OWNER	REF.	REFER, REFERENCE		
F.E.	FIRE EXTINGUISHER	REQ'D	REQUIRED		
F.E.C.	FIRE EXTINGUISHER CABINET	R.O.	ROUGH OPENING		
FIN.	FINISH(ED)	S.F.	SQUARE FEET		
F.O.	FACE OF	S.I.	SQUARE INCHES		
GA.	GAUGE	SCW	SOLID CORE WOOD		
G.C.	GENERAL CONTRACTOR	S.S.	STAINLESS STEEL		
		SHT.	SHEET		
		SHTS.	SHEETS		

PROJECT DIRECTORY

OWNER
HUDDLE HOUSE, INC.
5901-B PEACHTREE DUNWOODY RD NE
SUITE 450
SANDY SPRINGS, GA 30328
ATTN: PAUL RONDEAU
(813) 298-2620
PRONDEAU@HUDDLEHOUSE.COM

CONTRACTOR
NAME
ADDRESS
CITY, STATE 00000
CONTACT: ---
T: (---) ___-____
E: EMAIL

ARCHITECT
NORWOOD ARCHITECTS
807 FORREST ST.
ATLANTA, GEORGIA 30318
CONTACT: SHAUN FOGARTY
T: (678) 921-0302
E: SHAUN@NORWOODA.COM

STRUCTURAL ENGINEER
KOBLASZ & KENNISON ENGINEERING, PC
232 CREEKSTONE RIDGE
WOODSTOCK, GA 30188
CONTACT: LUKE KENNISON
(404) 860-2600

CIVIL ENGINEER
MASS ENGINERING & CONSULT., LLC
3459 ACWORTH DUE WEST RD SUITE 565
ACWORTH, GA 30101
CONTACT: NICK SAWKA
O 404.850.7790
NICKS@MASS-ENG.COM

MECHANICAL ENGINEER / PLUMBING ENGINEER / ELECTRICAL ENGINEER
JUSTIN R. HARDY, PE
5014 KINGSBRIDGE PASS
POWDER SPRINGS, GA 30127
T: (678) 234-8156
E:JUSTIN@HLMEP.COM

HEALTH DEPARTMENT

BUILDING DEPARTMENT

SCHEDULE OF DRAWINGS

DWG. NO.	DRAWING TITLE	REVISIONS
ARCHITECTURAL DRAWINGS		
A001	COVER SHEET	
A002	CODE DATA AND ACCESSIBILITY	
A003	FINISH SCHEDULES & SPECIFICAIONS	
A100	DIMENSIONED AND NOTED FLOOR PLAN	
A101	FINISH PLAN	
A102	FURNITURE PLAN	
A103	GRAPHICS AND DECOR PLAN	
A104	REFLECTED CEILING PLAN	
A105	ROOF PLAN & DETAILS	
A200	EXTERIOR ELEVATIONS	
A300	BUILDING SECTIONS	
A301	WALL SECTIONS	
A302	WALL SECTIONS	
A303	WALL SECTIONS	
A304	EXTERIOR DETAILS	
A400	INTERIOR ELEVATIONS	
A401	INTERIOR ELEVATIONS	
A402	ENLARGED RESTROOM PLAN, ELEVS. & MISC. DETAILS	
A500	ENLARGED WALK-IN PLAN AND DETAILS	
A600	DOOR AND WINDOW TYPES & SCHEDULES	
A601	ENLARGED VESTIBULE AND EXTERIOR DOOR DETAILS	
A602	DOOR AND WINDOW DETAILS	
A700	FOOD SERVICE EQUIPMENT PLAN	
A701	FOOD SERVICE EQUIPMENT SCHEDULE	
A702	FOOD SERVICE EQUIPMENT ELEVATIONS	
A703	FOOD SERVICE EQUIPMENT ELEVATIONS	
CIVIL/LANDSCAPE DRAWINGS		
C-03	SITE PLAN	
STRUCTURAL DRAWINGS		
S-0	STRUCTURAL DESIGN NOTES	
S-1	FOUNDATION PLAN	
S-2	CEILING LEVEL FRAMING PLAN	
S-3	ROOF FRAMING PLAN	
SD-1	STRUCTURAL DETAILS	
SD-2	STRUCTURAL DETAILS	
SD-3	STRUCTURAL DETAILS	
SD-4	STRUCTURAL DETAILS	
SD-5	STRUCTURAL DETAILS	
MECHANICAL DRAWINGS		
M001	MECHANICAL SPECIFICATIONS & SCHEDULES	
M100	MECHANICAL FLOOR PLAN	
M200	MECHANICAL ROOF PLAN & DETAILS	
MH100	HOOD PLANS ELEVATIONS & SCHEDULE	
MH101	HOOD EXHAUST FANS & FAN SCHEDULE	
MH102	HOOD ELECTRICAL PACKAGES & CONTROL PANEL	
MH103	HOOD ELECTRICAL WIRING DIAGRAM	
MH104	HOOD ELECTRICAL WIRING DIAGRAM	
PLUMBING DRAWINGS		
P100	SANITARY WASTE AND VENT PLAN	
P200	DOMESTIC WATER AND GAS PLAN	
P300	PLUMBING SCHEDULES, NOTES, & DETAILS	
ELECTRICAL DRAWINGS		
E001	ELECTRICAL GENERAL INFORMATION	
E100	LIGHTING FLOOR PLAN	
E200	POWER FLOOR PLAN	
E300	ELECTRICAL MECHANICAL PLAN	
E400	ELECTRICAL DETAILS & SCHEDULES	

ISSUE SUMMARY

ISSUE DATE	ISSUED SHEET OR SET TITLE	NOTES

STATE OF GEORGIA — SHAUN M. FOGARTY 04/15/2019 — CERTIFICATE NUMBER RA014306 — REGISTERED ARCHITECT

JOB NO. L1905

NORWOOD ARCHITECTS
807 forrest st. nw
atlanta, georgia 30318
ph. 678-921-0302 fax. 678-921-0301 www.norwoodarchitects.com

HUDDLE HOUSE
EVO 2000 RESTAURANT
40 US HWY 84 CAIRO, GA
GRADY CO. 39828

NO.	ISSUE DATE
	PERMIT SET 04/15/2019

SHEET TITLE: **COVER SHEET**

DRAWING NUMBER: **A001**

Order Plans @ www.LDILine.com